

SERIES TS 880 • 800 - 4000 AMP
AUTOMATIC TRANSFER SWITCH
MISSION CRITICAL, INDUSTRIAL



TS 880 AUTOMATIC TRANSFER SWITCHES OFFER:

ENCLOSED CONTACT POWER SWITCHING UNITS

- Fully enclosed silver alloy contacts provide high withstand rating & 100% continuous current rating
- 3 and 30-Cycle short circuit current withstand tested
- Completely separate utility and generator side power switching units
- Safe manual operation permits easy operation

SUPERIOR SERVICEABILITY

- All mechanical and control devices are visible and readily accessible

CONTROL FEATURES

- TSC 7320 Advanced ATS Controller with comprehensive features
- Isolation plug permits disconnecting control circuits from all power sources

PRODUCT DATA

- Models available from 800A - 4000A continuous
- Available 3 or 4 Pole
- All models 50/60Hz rated
- Voltage range 208 - 600V
- 3 Phase, 3 or 4 wire systems

SEISMIC CERTIFICATION:

TS 880 is certified for installation and operation per the following requirements:

- IBC 2012 – Section 13, Occupancy Category IV
- ASCE7 - 05 Region 3 (minimum SS=200%)
- OSHPD Certified

SAFETY STANDARDS

- UL 1008
- CSA C22.2 No. 178 Automatic Transfer Switches

WARRANTY

- 2 year limited warranty included

TS 880 Automatic Transfer Switches employ two mechanically interlocked power switching units with an Advanced ATS Controller to automatically start a generator and transfer system load to a generator supply in the event of a utility supply failure. System load is then automatically retransferred back to the utility supply following restoration of the utility power source to within normal operating limits. All load transfer sequences are open transition (i.e., break-before-make) with adjustable neutral position delay unless the closed transition option is supplied with the transfer switch. The optional 30-Cycle rated ATS utilizes insulated case switch power switching devices in ratings 800A through 4000A, up to 600VAC.

The standard TS 880 Automatic Transfer Switch is rated for 100% system load. The TS 880 design allows for optional use of integral over current trip elements within the power switching units. All TS 880 Automatic Transfer Switches use a TSC 7320 Advanced ATS controller which provides all necessary control functions for fully automatic operation. The controller is equipped with 2.3" back-lit LCD display which provides operating status and controls. All parameters and configurations are entered without opening the front door.

TS 880 Automatic Transfer Switches are specifically designed and certified to CSA C22.2 No. 178 & UL 1008 Standards. All TS 880 application and options are available for the 3 and 30-Cycle designs including:

- Closed Transition
- Bypass Isolation Automatic Transfer Switch
- Service Entrance
- CSA Type B with integrated over current protection and ground fault protection

The TS 880 30-Cycle shares the same design as Thomson Technology Power Systems UL 1558 LV Power Circuit Breaker Switchgear; therefore it can be seamlessly integrated into a Parallel Generation Switchgear package.

SERVICE ENTRANCE ATS (For U.S. Market Only)

TS 880 Service Entrance (SE) Automatic Transfer Switches incorporate an isolating mechanism and over current protection on the utility supply, thereby removing the need to have a separate, upstream circuit breaker/disconnect switch. This unique service entrance rated automatic transfer switch design is incorporated into a standard sized ATS enclosure.

The Service Entrance Rated ATS feature is a standard option that can be applied to any TS 880 model of Thomson Power Systems Transfer Switch.


Standard features of the Service Entrance Rated Automatic Transfer Switch include a NEMA®* 1 rated enclosure, padlockable Service Disconnect control switch and status indications.

TS 880 SE service disconnect operation is simple and ensures a high level of safety for system maintenance personnel. Normal operation and performance of the Automatic Transfer Switch is unaffected by the Service Entrance ATS feature.

TS 880 SE Automatic Transfer Switches are specifically designed and certified to the UL 1008 Standard as well as complying with NEC and NFPA requirements. TS 880 SE Automatic Transfer Switches are for use in emergency power system applications such as commercial, industrial or government institutions that require automatic standby power.

All TS 880 SE Automatic Transfer Switch models have been 3 or 30-Cycle withstand current tested in accordance with UL 1008 and CSA 178, which allow high current rating and use of nonseries rated upstream protective devices. The TS 880 SE Automatic Transfer Switch is rated for the system load and requires upstream over current protection on the generator supply.

TYPICAL SINGLE LINE DIAGRAM

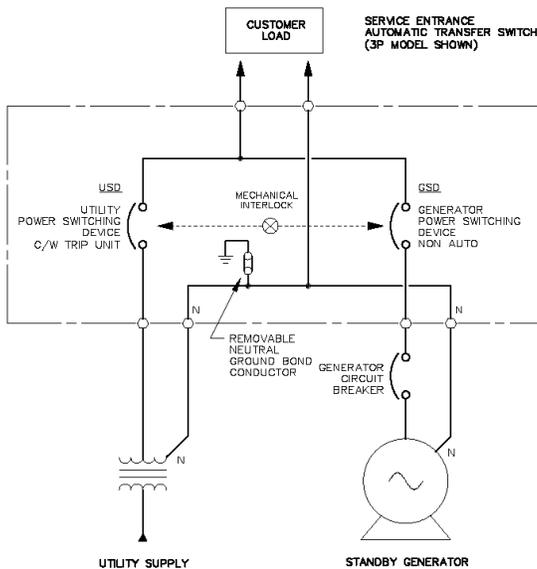

OPERATION MODE

Service Entrance Automatic Transfer Switch	Utility Power Switching Device	Generator Power Switching Device	ATS Load
Operation Mode	Position	Position	
Normal Conditions (Utility Power Supplying Load)	Closed	Open	Energized
Utility Power Failure (Generator Supplying Load)	Open	Closed	Energized
Service Disconnect Mode	Open (Mechanically & electrically interlocked)	Open (Mechanically & electrically interlocked)	De-Energized

* See last page for attribution.

WITHSTAND CURRENT RATINGS (3-CYCLE MODELS)

MODEL	TYPE	MAX VOLTAGE	RATED CURRENT (AMPS)	WITHSTAND CURRENT RATING AMPS (RMS) ¹		
				@240V	@480V	@600V
TS 88xA-0800	MASTERPACT®*	600	800A	100,000	100,000	85,000
TS 88xA-1200	MASTERPACT	600	1200A	100,000	100,000	85,000
TS 88xA-1600	MASTERPACT	600	1600A	100,000	100,000	85,000
TS 88xA-2000	MASTERPACT	600	2000A	100,000	100,000	85,000
TS 88xA-2500	MASTERPACT	600	2500A	100,000	100,000	85,000
TS 88xA-3000	MASTERPACT	600	3000A	100,000	100,000	85,000
TS 88xA-4000	MASTERPACT	600	4000A	100,000	100,000	85,000
TS 88xA-1600	EMAX2®*	600	1600A	85,000	85,000	85,000
TS 88xA-2000	EMAX2	600	2000A	85,000	85,000	85,000
TS 88xA-2500	EMAX2	600	2500A	100,000	100,000	100,000
TS 88xA-3200	EMAX2	600	3200A	100,000	100,000	100,000
TS 88xA-4000	EMAX2	600	4000A	100,000	100,000	100,000

For higher interrupt ratings contact — consult Thomson Technology Power Systems

WITHSTAND CURRENT RATINGS (30-CYCLE MODELS)

MODEL	TYPE	MAX VOLTAGE	RATED CURRENT (AMPS)	WITHSTAND CURRENT RATING AMPS (RMS) ¹		
				@240V	@480V	@600V
TS 88xA-0800	MASTERPACT	600	800A	65,000	65,000	65,000
TS 88xA-1600	MASTERPACT	600	1600A	65,000	65,000	65,000
TS 88xA-2000	MASTERPACT	600	2000A	65,000	65,000	65,000
TS 88xA-3200	MASTERPACT	600	3200A	65,000	65,000	65,000
TS 88xA-4000	MASTERPACT	600	4000A	85,000	85,000	85,000
TS 88xA-1600	EMAX2	600	1600A	85,000	85,000	85,000
TS 88xA-2000	EMAX2	600	2000A	85,000	85,000	85,000
TS 88xA-2500	EMAX2	600	2500A	100,000	100,000	100,000
TS 88xA-3200	EMAX2	600	3200A	100,000	100,000	100,000
TS 88xA-4000	EMAX2	600	4000A	100,000	100,000	100,000

For higher interrupt ratings contact — consult Thomson Technology Power Systems

* MASTERPACT is believed to be the trademark and/or trade name of Merlin Gerin S.A., and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

* EMAX2 is believed to be the trademark and/or trade name of ABB, and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

ENCLOSURE DIMENSIONS/CABLE TERMINATIONS (ATS only)

AMPER-AGE	DIMENSIONS ¹				SHIPPING WEIGHT lbs (kg)	TERMINAL RATING ²	
	HEIGHT INCHES (mm)	WIDTH INCHES (mm)	DEPTH ³ INCHES (mm)	DEPTH ³ (DRAWOUT OPTION)		QTY (PER PHASE)	RANGE
800A	91.5" (2324)	36" (914)	42" (1067)	48"	1500 lbs (680)	3	#2 - 600 mcm
1200A	91.5" (2324)	36" (914)	42" (1067)	48"	1500 lbs (680)	4	#2 - 600 mcm
1600A	91.5" (2324)	36" (914)	42" (1067)	48"	1500 lbs (680)	5	#2 - 600 mcm
2000A	91.5" (2324)	36" (914)	42" (1067)	48"	1500 lbs (680)	6	#2 - 600 mcm
2500A	91.5" (2324)	36" (914)	60" (1524)	60"	1800 lbs (817)	8	#2 - 600 mcm
3000A/3200A	91.5" (2324)	36" (914)	60" (1524)	60"	2000 lbs (907)	9	#2 - 600 mcm
4000A	91.5" (2324)	48" (1219)	72" (1829)	72"	3000 lbs (1361)	12	#2 - 600 mcm

Optional NEMA[®]* 1, 12, 2, 3R & 3RX class enclosures available — consult Thomson Technology Power Systems.

- 1 Enclosure dimensions are for reference. (Not intended for construction purposes).
 - 2 All cable connections suitable for copper or aluminum.
 - 3 Enclosure depth shown has cable entry/exit location restrictions. Contact factory for further detailed information.
- * Enclosures painted ASA #61 Gray.

ENCLOSURE DIMENSIONS/CABLE TERMINATIONS (ATS with Bypass Switch)

AMPER-AGE	NEMA 1 DIMENSIONS ¹						SHIPPING WEIGHT lbs (kg)		TERMINAL RATING ²	
	HEIGHT INCHES (mm)		WIDTH INCHES (mm)		DEPTH ³ INCHES (mm)		3 POLE	4 POLE	QTY (PER PHASE)	RANGE
	3 POLE	4 POLE	3 POLE	4 POLE	3 POLE	4 POLE	3 POLE	4 POLE		
800A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3200 lbs (1451)	3800 lbs (1724)	3	#2 - 600 mcm
1200A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3200 lbs (1451)	3800 lbs (1724)	4	#2 - 600 mcm
1600A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3200 lbs (1451)	3800 lbs (1724)	5	#2 - 600 mcm
2000A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3200 lbs (1451)	3800 lbs (1724)	6	#2 - 600 mcm
2500A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3600 lbs (1633)	4250 lbs (1928)	8	#2 - 600 mcm
3000 / 3200A	92" (2337)	92" (2337)	72" (1829)	72" (1829)	66" (1829)	66" (1829)	3600 lbs (1633)	4250 lbs (1928)	9	#2 - 600 mcm
4000A	92" (2337)	92" (2337)	96" (2438)	96" (2438)	90" (2286)	90" (2286)	6500 lbs (2948)	7500 lbs (3402)	12	#2 - 600 mcm

- 1 Enclosure dimensions are for reference. (Not intended for construction purposes).
 - 2 All cable connections suitable for copper or aluminum.
 - 3 Enclosure depth shown has cable entry/exit location restrictions. Contact Factory for further detailed information.
- * Enclosures painted ASA #61 Gray.

STANDARD FEATURES

- 2.3" back-lit LCD display for monitoring 3 Phase Utility/Generator voltage, system frequency, operation status and alarms
- Five key menu navigation
- Front panel editing with PIN protection
- Load on Utility & Load on Generator indication
- Utility & Generator Source available indication
- 3 Phase Voltage sensing on Utility & Generator Sources
- Generator AC frequency sensing
- Utility under voltage control setpoint 50 - 95%¹
- Generator under voltage control setpoint 50 - 95%¹
- Generator under frequency control setpoint 70 - 90%¹
- Engine warmup timer 0-60 min.¹
- Utility return timer 0-60 min.¹
- Engine start (Mains transient) delay timer 0-30 sec.¹
- Engine cooldown timer 0-60 min.¹
- Neutral position delay timer 0-300 sec.¹
- Load Disconnect Contact (LDC) for pre/post transfer control to signal external building systems such as elevators during transfer operations
- Multiple date and time scheduler for On-load or Off-load Programmability
- Real-time clock provides accurate event logging
- Data logging including total transfers to generator, total utility power failures, load on utility hours, load on generator hours and utility or generator voltage/frequency data at time of fault
- Ten outputs total. Two user Programmable Output Contacts rated 2A, 24VDC resistive and two user Programmable Output Contacts rated 15A, 24VDC resistive, Form A. Each output contact is user programmable to 20 different functions including: Load on Utility, Load on Gen, Load Disconnect Contact (LDC), Fail to Transfer (FTT), Utility Power Available (UPA), Generator Power Available (GPA), Utility Power Fail, ATS Not in Auto, and ATS in Auto.
- The Transfer Switch is pre-programmed with the following outputs enabled:
 - Load on Utility (UX) (15A)
 - Load on Gen (GX) (15A)
 - Load Disconnect Contact (LDC) (8A)
 - Fail to Transfer (FTT) (2A)
 - ATS Not in Auto (NIA) (2A)



- Local and Remote utility power fail simulation test
- Local plant exercise initiate pushbutton control
- Engine start contact (8A, 120/240VAC resistive max.)
- Transfer fail/forced transfer logic
- Automatic force transfer to alternate supply should load voltage become de-energized
- 24VDC control power
- Remote Load Test/Peak Shave Input
- Solid Neutral on 4 Wire Systems
- Auto Configuring System Voltage Type (3 wire delta or 4 wire Wye capable without additional sensing transformers)
- ATS Generator Bus Power Metering Capability (Amp, Volt, Freq, kW, kVA, PF)²
- Under/Over Frequency Protection - Utility and Generator Sources
- 3 Phase Over Voltage Protection - Utility and Generator Sources
- Phase Sequence and Phase Rotation Protection between Utility and Generator Sources
- Voltage Phase Loss/Unbalance Protection
- Fourteen Programmable Inputs total (Quantity 5 User Programmable Inputs)
- Optional Remote Input module DSE2130 (Quantity 8) Digital inputs
- Optional Remote Output module DSE2157 (Quantity 8) relay contacts
- RS485 Modbus[®]* Remote Communication Port (Modbus Serial RTU)
- Optional Ethernet Modbus TCP/IP[®] Remote Communication Module DSE855 (Modbus TCP/IP)
- Optional Remote Annunciator
- Support up to Three Remote Display Units
- Serviceable Plug-in connectors

¹ Settings are adjustable

² Power Metering requires Current Transformer Option Kit.

* ModBus is believed to be the trademark and/or trade name of Schneider electric USA, Inc., and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

TS 880 ORDERING INFORMATION

When placing an order, specify the following 21 digit ATS MODEL CODE as per the features and applications described below.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
T	S		8	8																

1-3. SERIES

TS - TRANSFER SWITCH

4 & 5. MODEL

88 - 880 SWITCH

6. POLES

3 - 3 - POLES

4 - 4 - POLES

7. CONFIGURATION TYPE

A - ATS

B - BYPASS/ISOLATION ATS

X - SPECIAL

8 - 11. AMPERAGE

800

1000

1200

1600

2000

2500

3000

3200

4000

12. APPLICATION

A - STANDARD

B - SERVICE ENTRANCE

C - DUAL UTILITY CONTROL

D - DUAL STANDBY GEN (Slave ATS)

E - 30 CYCLE STANDARD

F - 30 CYCLE SERVICE ENTRANCE

G - 30 CYCLE DUAL UTILITY (DU)

H - DUAL PRIME GEN CONTROL

I - 30 CYCLE DUAL STANDBY GEN (DSG)

J - 30 CYCLE DUAL PRIME GEN (DPG)

X - SPECIAL

13. OPERATION TYPE

1 - OPEN TRANSITION

2 - MANUAL ELEC. OP.

3 - CLOSED TRANSITION (MOMENTARY)

4 - CLOSED TRANSITION (SOFT LOAD)

X - SPECIAL

14. SAFETY STANDARD

A - UL 1008 (Service Entrance)

C - UL 1008 / CSA 178

X - NOT APPLICABLE

15. VOLTAGE

3Ø 4 WIRE (GROUNDED NEUTRAL)

E - 120/208¹

F - 127/220

G - 120/240¹ (DELTA)

H - 220/380²

S - 230/400²

J - 240/416

K - 254/440

M - 277/480¹

N - 347/600¹

3Ø 3 WIRE

P - 208

Q - 220

R - 240

U - 416

V - 480

W - 600

X - SPECIAL

16. CONTROLLER

5 - TSC 900 c/w GHC GRAPHIC DISPLAY

6 - TSC 7320 c/w LCD DISPLAY

7 - NONE (MANUAL)

17. ENCLOSURE TYPE

A - NEMA® 1, ASA #61 GRAY

B - NEMA® 2, ASA #61 GRAY

C - NEMA® 12, ASA #61 GRAY

D - NEMA® 3R SD, ASA #61 GRAY

E - NEMA® 3R DD, ASA #61 GRAY

F - NEMA® 3RX / 4X DD
(304 STAINLESS STEEL)

G - NONE (OPEN STYLE)

H - NEMA® 4X SD
(304 STAINLESS STEEL)

K - NEMA® 4X SD
(316 STAINLESS STEEL)

L - NEMA® 3RX / 4X DD
(316 STAINLESS STEEL)

X - SPECIAL

18. UTILITY SWITCHING DEVICE

Q - INSULATED CASE, FIX MOUNT SWITCH

R - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC TRIP

T - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC & GF TRIP

U - INSULATED CASE DRAW-OUT SWITCH

V - INSULATED CASE DRAW-OUT SWITCH
C/W ELECTRONIC TRIP

W - INSULATED CASE, DRAW-OUT SWITCH
C/W ELECTRONIC & GF TRIP

X - SPECIAL

19. GENERATOR SWITCHING DEVICE

Q - INSULATED CASE, FIX MOUNT SWITCH

R - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC TRIP

T - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC & GF TRIP

U - INSULATED CASE DRAW-OUT SWITCH

V - INSULATED CASE DRAW-OUT SWITCH
C/W ELECTRONIC TRIP

W - INSULATED CASE, DRAW-OUT SWITCH
C/W ELECTRONIC & GF TRIP

X - SPECIAL

20. POWER CONNECTIONS

A - STANDARD

C - ATS CONNECTION PLATE 800A

D - ATS CONNECTION PLATE 1000/1200A

F - ATS CONNECTION PLATE 800A - U & G

G - ATS CONNECTION PLATE 1000 /1200A - U & G

H - ATS CONNECTION PLATE 1600A

I - ATS CONNECTION PLATE 2000A

J - ATS CONNECTION PLATE 2500A

K - ATS CONNECTION PLATE 3000/3200A

L - ATS CONNECTION PLATE 4000A

X - SPECIAL

21. ATS CONNECTION CONFIGURATION³

A - STANDARD

E - ALTERNATE E

F - ALTERNATE F

G - ALTERNATE G

X - SPECIAL

NOTES:

¹ MULTI-VOLTAGE CAPABLE

² FOR 50 Hz APPLICATION

³ FOR BYPASS SWITCH APPLICATIONS

REFER TO FACTORY

* See last page for attribution.

OPTIONAL FEATURES (Specify separately from ATS MODEL CODE when ordering)

CODE	DESCRIPTION
<u>AUXILIARIES:</u>	
AUX-BG	Generator Bypass Auxiliary Contact
AUX-BU	Utility Bypass Auxiliary Contact
KOTS-DSE	Key Operated Test Switch - Auto/Off/Engine Start/Test - includes the DSE2130 module
RO2157	Programmable Relay Output Expansion Module - Includes QTY 8, 2A Resistive 30VDC rated relays - 4 NO and 4 Form C Contacts
TS-STG	24Vdc or 120VAC Shunt Trip Generator Switch (external power source required)
TS-STU	24Vdc or 120VAC Shunt Trip Utility Switch (external power source required)
PPR-10-DSE	Programmable Power Relay Includes 10A Form C Contact Wired to Terminal Block (Up to Qty 3)
<u>COMMUNICATION:</u>	
EMB-TCP/IP-DSE-MOXA	Ethernet Modbus®* Remote Communication (Modbus TCP) via (DSE855)
RA 7320 (DSE2548)	Remote annunciator with eight configurable LEDs. Works up to 0.6 miles from the TSC7320. Up to 10 modules can be daisy-chain (Refer to the DSE2548 Datasheet)
RD 7320 (DSE2520)	Remote Display. Up to three display modules can be connected to TSC7320 (Refer to the DSE2510-20 Datasheet)
<u>ENCLOSURE:</u>	
LCK	Enclosure Lockable Door (Single point T-Handle lock)
TS-H1	Enclosure Strip Heater c/w Thermostat (120VAC external power source required)
TS-H2	Enclosure Strip Heater c/w Thermostat (internally powered from ATS load)
<u>FUNCTION:</u>	
MTS	Manually Initiated Electrically Operated Transfer Switch c/w Source Selector Switch, Position Indicating Lights, Source Available Lights
TCP	Transfer Switch Connection Plate for Generator Supply (Portable Generator Docking Station)
LSC	Load Shed, 5 Stage - Requires CTK Option
<u>METERING:</u>	
LPM-DSE	Transfer Switch Load Power Metering CT Kit (Amp, Volt, Freq, kW, kVA, PF) - Requires CT Kit
CTKxxxx-DSE	Current Transformer Kit (xxxx -Specify CT Size 800, 1200, 1600, 2000, 3000, 4000) - Requires CT Kit
MUP	Multifunction Utility Protective Relay – Basler®** IPS100 (Protection Functions 27, 32, 47, 50/51, 67, 81O/U) (NOTE: May be required by local utility for Momentary CT applications. Consult factory for other makes and models.)
<u>POWER:</u>	
SPD	Surge Protection Device
<u>OTHER:</u>	
3YR	Additional 12 Month Warranty***
5YR	Additional 48 Month Warranty***

* ModBus is believed to be the trademark and/or trade name of Schneider Electric USA, Inc., and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

** Basler is believed to be the trademark and/or trade name of Basler Electric Company and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

*** Refer to TPS Warranty for additional details



Regal Rexnord

Customer Service: 1-888-888-0110

Sales: Thomsonps_sales@regalrexnord.com

Support: Thomsonps.support@regalrexnord.com

Regalrexnord.com/thomson

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

*NEMA is believed to be the trademark and/or trade name of the National Electrical Manufacturers Association and is not owned or controlled by Regal Rexnord Corporation or any of its affiliates.

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity. Regal Rexnord and THOMSON POWER SYSTEMS are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© [2016], 2023 Regal Rexnord Corporation, All Rights Reserved. MCB- CL061r15-TPS-EN-US 10/2024

The Regal Rexnord logo, featuring a stylized "R" icon followed by the words "Regal Rexnord" in a bold, sans-serif font.

APPROVED FOR
CONSTRUCTION.
DRAWINGS SUBJECT
TO CHANGE
WITHOUT NOTICE.

NMR NUMBER : NMR-0234100 **REV# :** 2 **DATE :** 25-06-09

CATALOG NUMBER : 11043832

MODEL NUMBER : TS 883A4000B1AY6ETQAA

ATTACHED DRAWINGS :

PHYSICAL LAYOUT & INSTALLATION DETAILS	ICS880M617	10A
ICS ATS AC SCHEMATIC, FIXED, SE-ABB EMAX2	ICS880E800	20A
AC CONTROL SCHEMATIC, CTTS/OTTS, SE	TSC700E205	20B
DC CONTROL SCHEMATIC, CTTS/OTTS, SE	TSC700E206	20C
24VDC POWER SUPPLY SCHEMATIC	TSC700E212_VA1	20D

FEATURES / RATINGS:

AMPERAGE : 4000A

VOLTAGE : 600V MAX (MULTI VOLTAGE CAPABLE)

POLES : 2/3-POLE

FREQUENCY : 60HZ

CONFIGURATION : STANDARD ATS

APPLICATION : SERVICE ENTRANCE

OPERATION : OPEN TRANSITION

ENCLOSURE : NEMA 3R DD, ASA #61 GREY

ATS CONTROLLER : TSC7320

UTILITY (OR SOURCE 1) SWITCHING DEVICE : INSULATED CASE, FIX MOUNT SWITCH C/W ELECTRONIC & GF TRIP

GENERATOR (OR SOURCE 2) SWITCHING DEVICE : INSULATED CASE, FIX MOUNT SWITCH

APPROVAL STANDARD : UL1008 (SERVICE ENTRANCE)


POWER CONNECTIONS : STANDARD

ATS CONNECTION CONFIGURATION : STANDARD


SUPPORTED VOLTAGE CONFIGURATIONS:

3 PH, 4 WIRE 120 / 208V
 120 / 240V (DELTA)
 277 / 480V
 347 / 600V


NOTE : REFER "MULTI VOLTAGE" LABEL AFFIXED ON THE TRANSFER SWITCH FOR SPECIFIC SYSTEM VOLTAGE CONFIGURATION

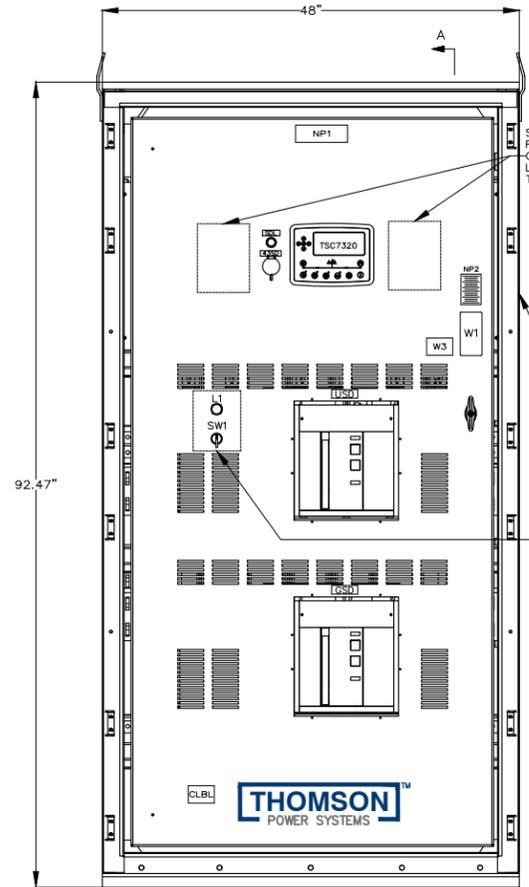


FRONT VIEW
(OUTER DOOR REMOVED)

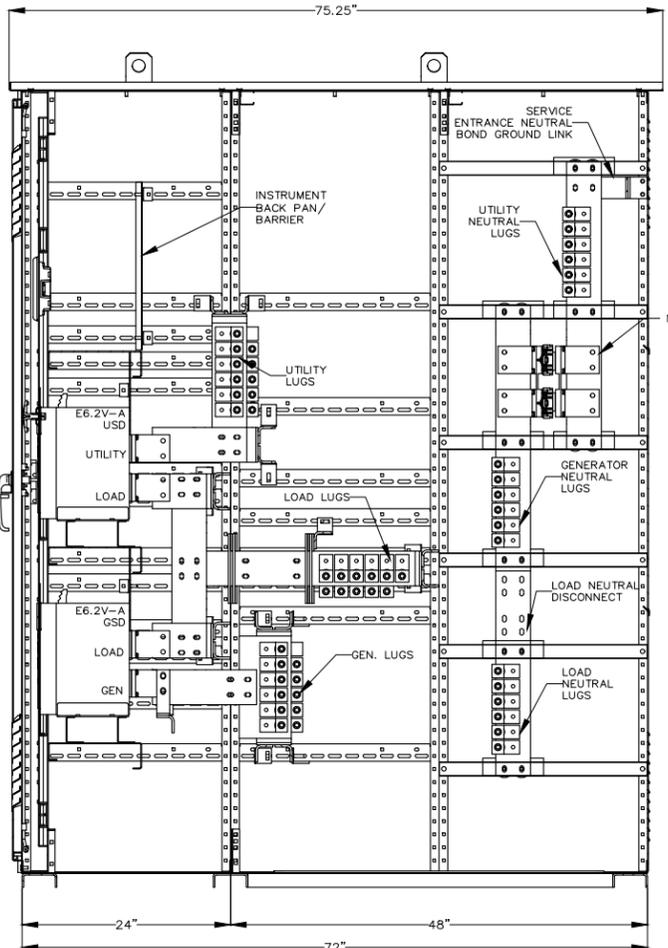

RIGHT SIDE VIEW
SECTION A-A

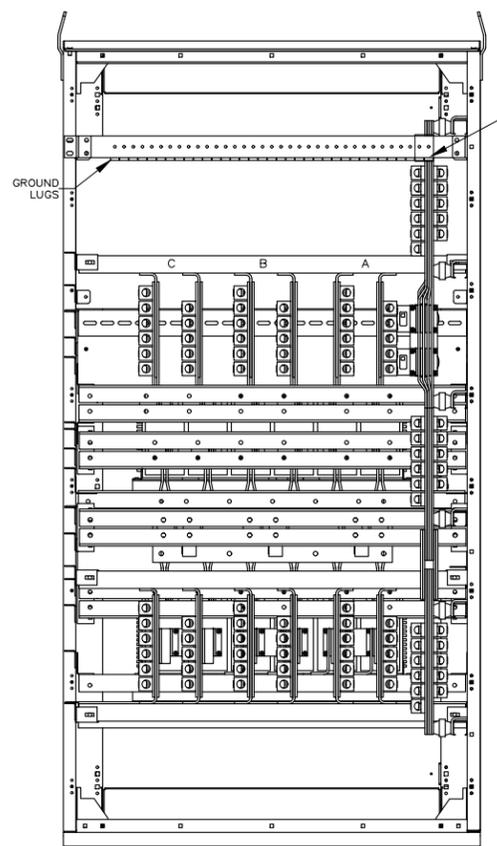

BACK VIEW

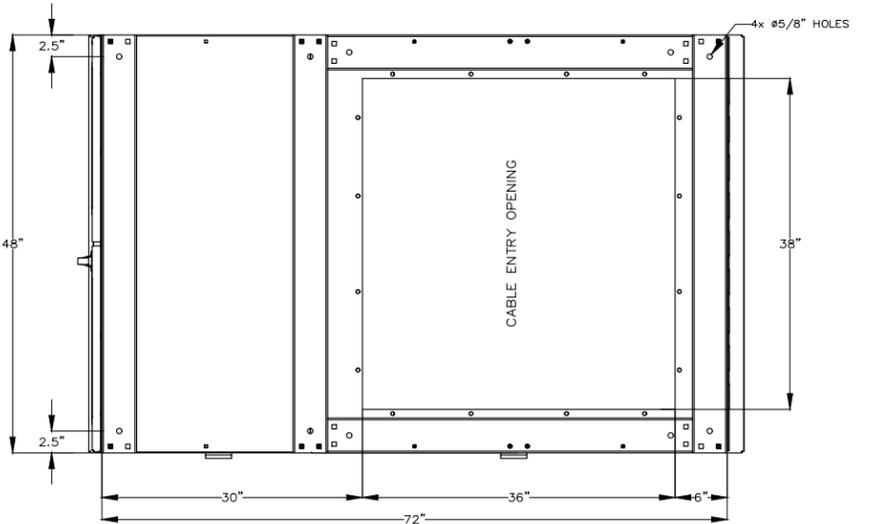

BASE PLAN
SECTION B-B

BASIC MODEL TS 88xA	SERVICE ENTRANCE ATS				
	WITHSTAND CURRENT RATING AVAILABLE AMPS (RMS)				
	MAX. VOLTAGE	RATED CURRENT (A)	240V	480V	600V
TS 88xA-4000	600	4000	100,000	100,000	100,000

CONNECTION DATA		
UTILITY (SRC1)	11C, 2/0-600MCM Cu/Al PER PHASE & NEUTRAL	
GENERATOR (SRC2)	11C, 2/0-600MCM Cu/Al PER PHASE & NEUTRAL	
LOAD	11C, 2/0-600MCM Cu/Al PER PHASE & NEUTRAL	
GROUND	33C, #6-250MCM Cu/Al	

- GENERAL NOTES**
- 1 SWITCHBOARD SUPPLIED IN ONE PIECE
 - 2 FRONT AND REAR ACCESS REQUIRED
 - 3 MAIN BUS 100% RATED, BRACED AT 100KA
 - 4 ALL BUS WILL BE TIN-PLATED COPPER
 - 5 UTILITY SWITCHING DEVICE (USD) IS ABB, EMAX E6.2V-A 3P, LSIG, FIXED TYPE
 - 6 GENERATOR SWITCHING DEVICE (GSD) IS ABB, EMAX E6.2V-A 3P FIXED TYPE
 - 7 AUTO TRANSFER SWITCH WIRING SHALL BE #18-14 TEW
 - 8 NAME PLATES TO BE BLACK WITH WHITE LETTERS
 - 9 REFER COVER PAGE / SELECTED OPTION LIST FOR PROJECT SPECIFIC DETAILS

2" x 6" (TYPICAL)

AUTOMATIC TRANSFER SWITCH

QTY = 1

1" x 3" (TYPICAL)

UTILITY SERVICE DISCONNECT SWITCHING DEVICE

QTY = 1

0.75" x 2" (TYPICAL)

GENERATOR SWITCHING DEVICE

QTY = 1

FOIL LABEL
BLACK LETTERS ON SILVER BACKGROUND

SERVICE DISCONNECT INSTRUCTIONS

TO DISCONNECT UTILITY AND GENERATOR SUPPLIES:

- MOVE SERVICE DISCONNECT SWITCH TO THE "TRANSFER TO NEUTRAL" POSITION. WAIT 2 SECONDS TO ALLOW ATS TO MOVE TO THE NEUTRAL POSITION.
- MOVE SERVICE DISCONNECT SWITCH TO THE "DISCONNECTED" POSITION.
- LOCK OFF SERVICE DISCONNECT SWITCH WITH SUITABLE PADLOCK.
- VERIFY LOAD IS DISCONNECTED VIA ILLUMINATED SERVICE DISCONNECT LIGHT. IF LIGHT IS NOT ILLUMINATED REFER TO INSTRUCTION MANUAL.
- LOCK ENCLOSURE DOOR CLOSED AND REMOVE KEY.

TO RE-ENERGIZE TRANSFER SWITCH:

- REMOVE APPLICABLE PADLOCKS AND MOVE SERVICE DISCONNECT SWITCH BACK TO THE ENERGIZED POSITION.
- REPLACE ENCLOSURE DOOR KEY IF FUTURE ACCESS REQUIRED.

QTY = 1

2.5" x 5"

WARNING
PELIGRO



Arc Flash and Shock Hazard
Will cause severe injury or death. More than one live circuit - see diagram. Disconnect all sources of supply before servicing. This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to comply may result in injury or death! Refer to NFPA 70E for minimum PPE requirements.

Risque d'Arc Electrique et d'Electrocution
Peut causer des blessures graves ou la mort. Plus d'un circuit sous tension - voir schéma. Déconnecter toutes les sources d'alimentation avant de faire l'entretien et les réparations. Ce matériel doit être installé et entretenu uniquement par un électricien qualifié. Ce dernier doit connaître les pratiques de travail sécuritaires et porter l'équipement de protection individuelle approprié. Le non respect peut entraîner des blessures ou la mort! Reportez-vous à NFPA 70E pour le manuel des exigences minimales PPE.

Riesgo de Arco y Choque Eléctrico
Se causarán lesiones graves o muerte. Más de un circuito energizado - ver diagrama. Desconectar todas las fuentes de suministro antes de hacer mantenimiento. Este equipo solo se debe instalar y mantener por personal calificado, usando medidas de seguridad y equipo de protección personal adecuados. No seguir estas recomendaciones puede causar lesiones o muerte! Consultar la NFPA 70E para los requisitos mínimos del equipo de protección personal (PPE).

QTY = 1

FOIL LABEL
BLACK LETTERS ON SILVER BACKGROUND

WARNING
TO ENSURE SAFETY OF PERSONNEL DOOR MUST BE LOCKED CLOSED WHEN USING THE "SERVICE DISCONNECT" SWITCH TO ISOLATE LOAD CIRCUITS. FASTEN DOOR SECURELY WITH SCREWS BEFORE LOCKING.

QTY = 1

0.75" x 2" (TYPICAL)

SERVICE DISCONNECT

QTY = 1

3.265" x 1.625"
FOIL LABEL
BLACK LETTERS ON SILVER BACKGROUND

MAKE BEFORE BREAK CONTACTS
(AFFIX AT THE PROXIMITY OF THE CONTROLLER)

GENERATOR AND UTILITY SOURCES MUST BE SYNCHRONIZED

QTY = 1

ONLY FOR CLOSED TRANSITION (CTTS APPLICATION)

2.5" x 2.25"
WHITE LETTERS ON RED BACKGROUND

WARNING
"ON" PUSHBUTTON BYPASSES CRITICAL INTERLOCKING AND MAY RESULT IN EQUIPMENT DAMAGE, PERSONAL INJURY, OR DEATH.

QTY=2

NOTE:
THE BREAKERS ARE PROVIDED WITH COVERS TO PREVENT ACCESS TO THESE PUSHBUTTONS.

CT (AFFIX AT THE PROXIMITY OF THE CONTROLLER)

APPROVED FOR CONSTRUCTION
 MASTER COPY REFERENCE COPY OF
 MULTIPLE UNIT WORK ORDER
 RELEASED FOR INFORMATION
 AUTH. BY: _____ DATE: _____



CROSS REFERENCE LEGEND	
50C-C-1	GRID COORDINATE
	SHEET No.

DRAWING No.	REFERENCE DRAWINGS	No.	REVISIONS	BY	DATE
2	UPDATED GROUND LUG QUANTITY IN CONNECTION DATA	NS	OG	25-06-03	
1	UPDATED CONTROL SWITCH AND LIGHT POSITIONS OF ERMS OPTION	NS	OG	25-02-07	
0	ORIGINAL RELEASE	NS	OG	22-02-17	



AUTOMATIC TRANSFER SWITCH
 MODEL TS 880
 PHYSICAL LAYOUT & INSTALLATION DETAILS
 4000A, 3P, NEMA 3R/3RX DD, ICS ATS, FIXED, SE

DRAWINGS AND/OR OTHER TECHNICAL INFORMATION SUPPLIED BY THOMSON POWER SYSTEMS AS A PART OF A SALE OF EQUIPMENT ARE FOR THE PURCHASER'S USE SOLELY IN CONJUNCTION WITH THAT EQUIPMENT, UNLESS SPECIFICALLY AGREED TO OTHERWISE AS A PART OF THE TERMS OF SALE.		
DRAWING/FILE No.	SHEET	REV
ICS880M617	10A	2

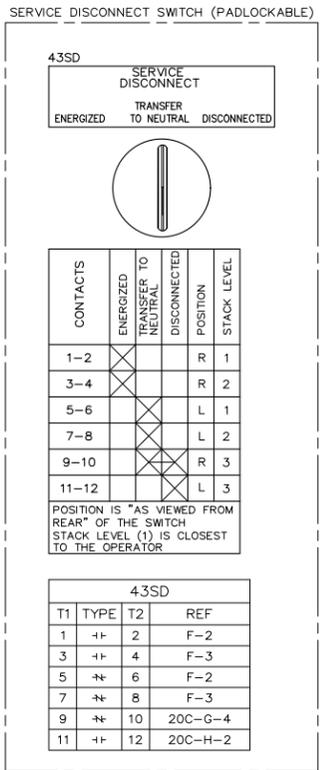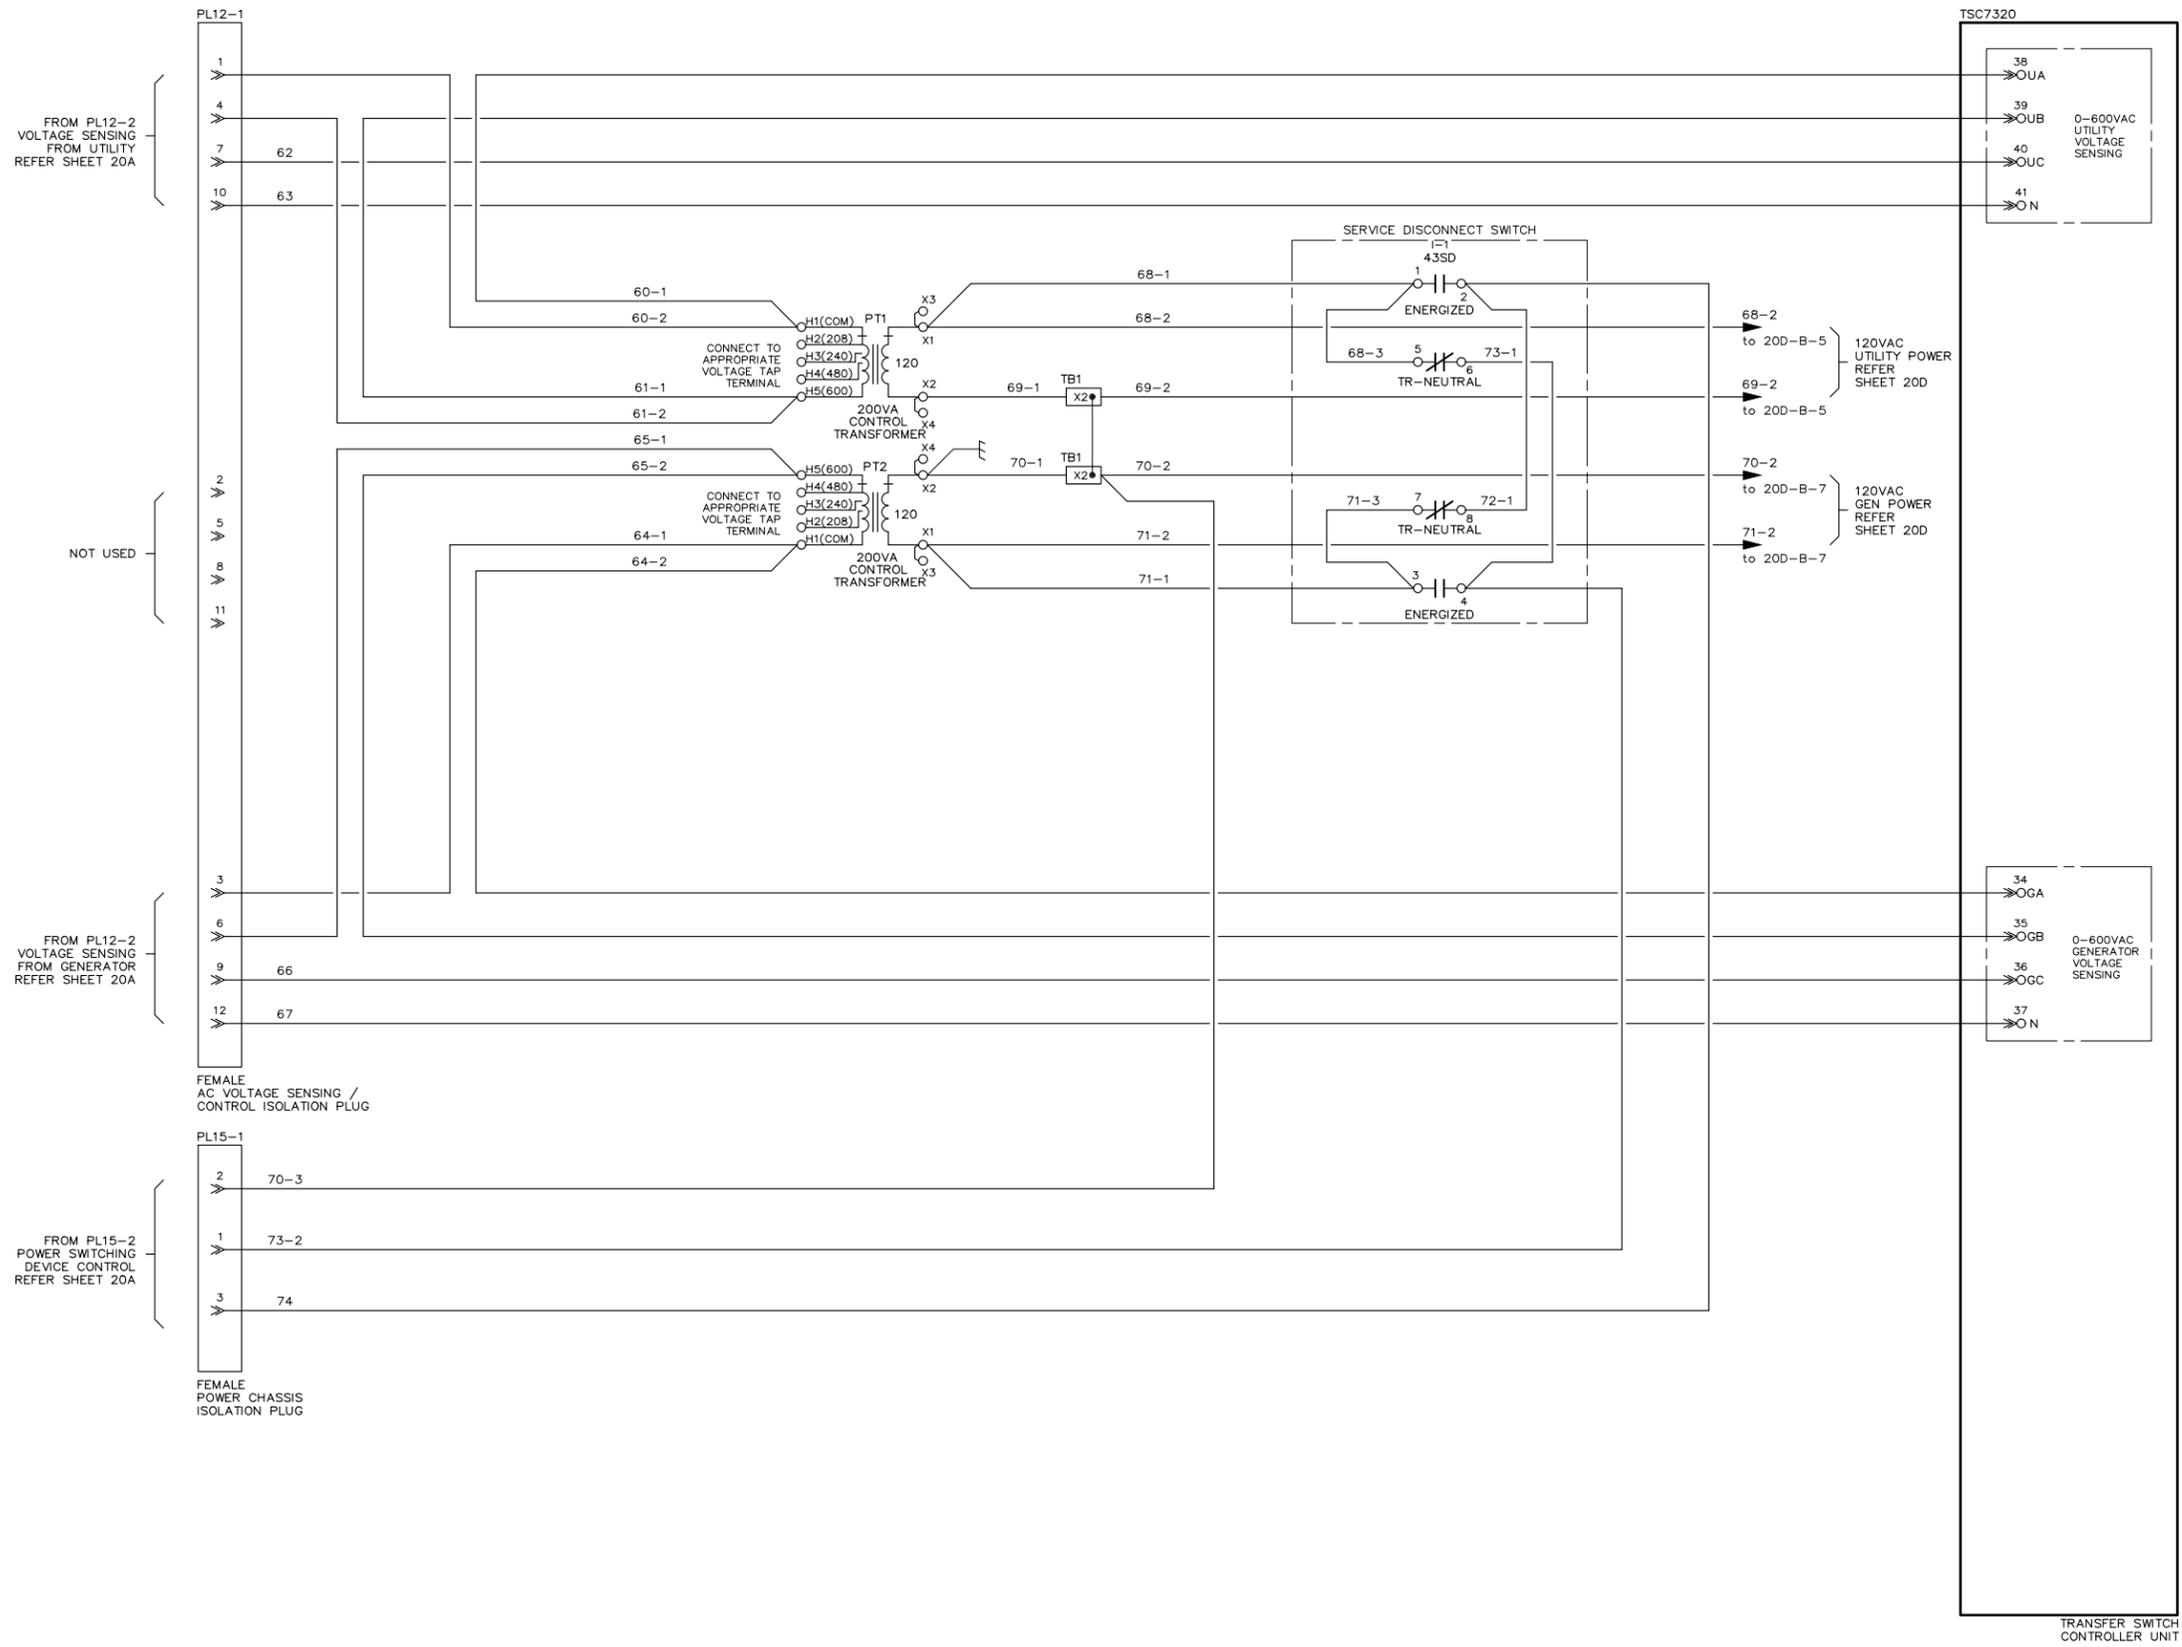

T1	TYPE	T2	REF
1	+	2	F-2
3	+	4	F-3
5	+	6	F-2
7	+	8	F-3
9	+	10	20C-G-4
11	+	12	20C-H-2

VOLTAGE		(X DENOTES HIGH POLARITY MARKER)						
PT TAP		208	240	380	400	416	480	600
H1		X	X	X	X	X	X	X
H2		X	X	X	X	X	X	X
H3		X	X	X	X	X	X	X
H4		X	X	X	X	X	X	X
H5		X	X	X	X	X	X	X

GENERAL NOTES		COLOR KEY	
1	COLOR CODE: ALL WIRING IS GREY UNLESS NOTED. SAFETY GROUND WIRES ARE GREEN.	BK	BLACK
	WIRE TYPE FOR MOS TRANSFER SWITCH: ALL WIRING SHALL BE 18AWG UNLESS NOTED.	BE	BLUE
2	WIRE TYPE FOR ICS TRANSFER SWITCH: ALL CONNECTIONS TO BUS & BREAKERS TO BE #14 AWG SIS, CT SECONDARY #10 AWG SIS. WIRING THAT IS TO BE PROVIDED AS A PART OF CONTROL COMPARTMENT SHALL BE #14 AWG TO #18 AWG TEW.	BN	BROWN
3	WIRE NUMBERS TO MATCH TERMINAL NUMBERS, UNLESS NOTED.	GN	GREEN
4	REFER COVER PAGE / SELECTED OPTION LIST FOR PROJECT SPECIFIC DETAILS	GY	GREY
		OR	ORANGE
		PE	PURPLE
		R	RED
		W	WHITE
		Y	YELLOW
		V	VIOLET

APPROVED FOR CONSTRUCTION
 MASTER COPY REFERENCE COPY _____ OF _____
 MULTIPLE UNIT WORK ORDER
 RELEASED FOR INFORMATION
 AUTH. BY: _____ DATE: _____

CROSS REFERENCE LEGEND	
50C-C-1	GRID COORDINATE
	SHEET No.
DRAWING No.	REFERENCE DRAWINGS


REVISIONS		BY	DATE
5	GENERAL NOTES UPDATED	NS OG	24-09-24
4	UPDATED 43SD SWITCH CONTACT DETAILS	NS OG	23-09-04
3	UPDATED 43SD SWITCH CONTACT DETAILS	SK OG	23-06-28
2	UPDATE WIRE TYPE INFORMATION	SN OG	23-04-18
1	UPDATED DC NEGATIVE CONNECTION	SK OG	23-02-23



AUTOMATIC TRANSFER SWITCH
 MODEL TS 870 / 880
 AC CONTROL SCHEMATIC, CTTs/OTTS, SE
 1000-4000A

DRAWINGS AND/OR OTHER TECHNICAL INFORMATION SUPPLIED BY THOMSON POWER SYSTEMS AS A PART OF A SALE OF EQUIPMENT ARE FOR THE PURCHASER'S USE SOLELY IN CONJUNCTION WITH THAT EQUIPMENT, UNLESS SPECIFICALLY AGREED TO OTHERWISE AS A PART OF THE TERMS OF SALE.		DRAWING/FILE No.	SHEET	REV
		TSC700E205	20B	5

DRAWINGS SUBJECT TO CHANGE WITHOUT NOTICE.

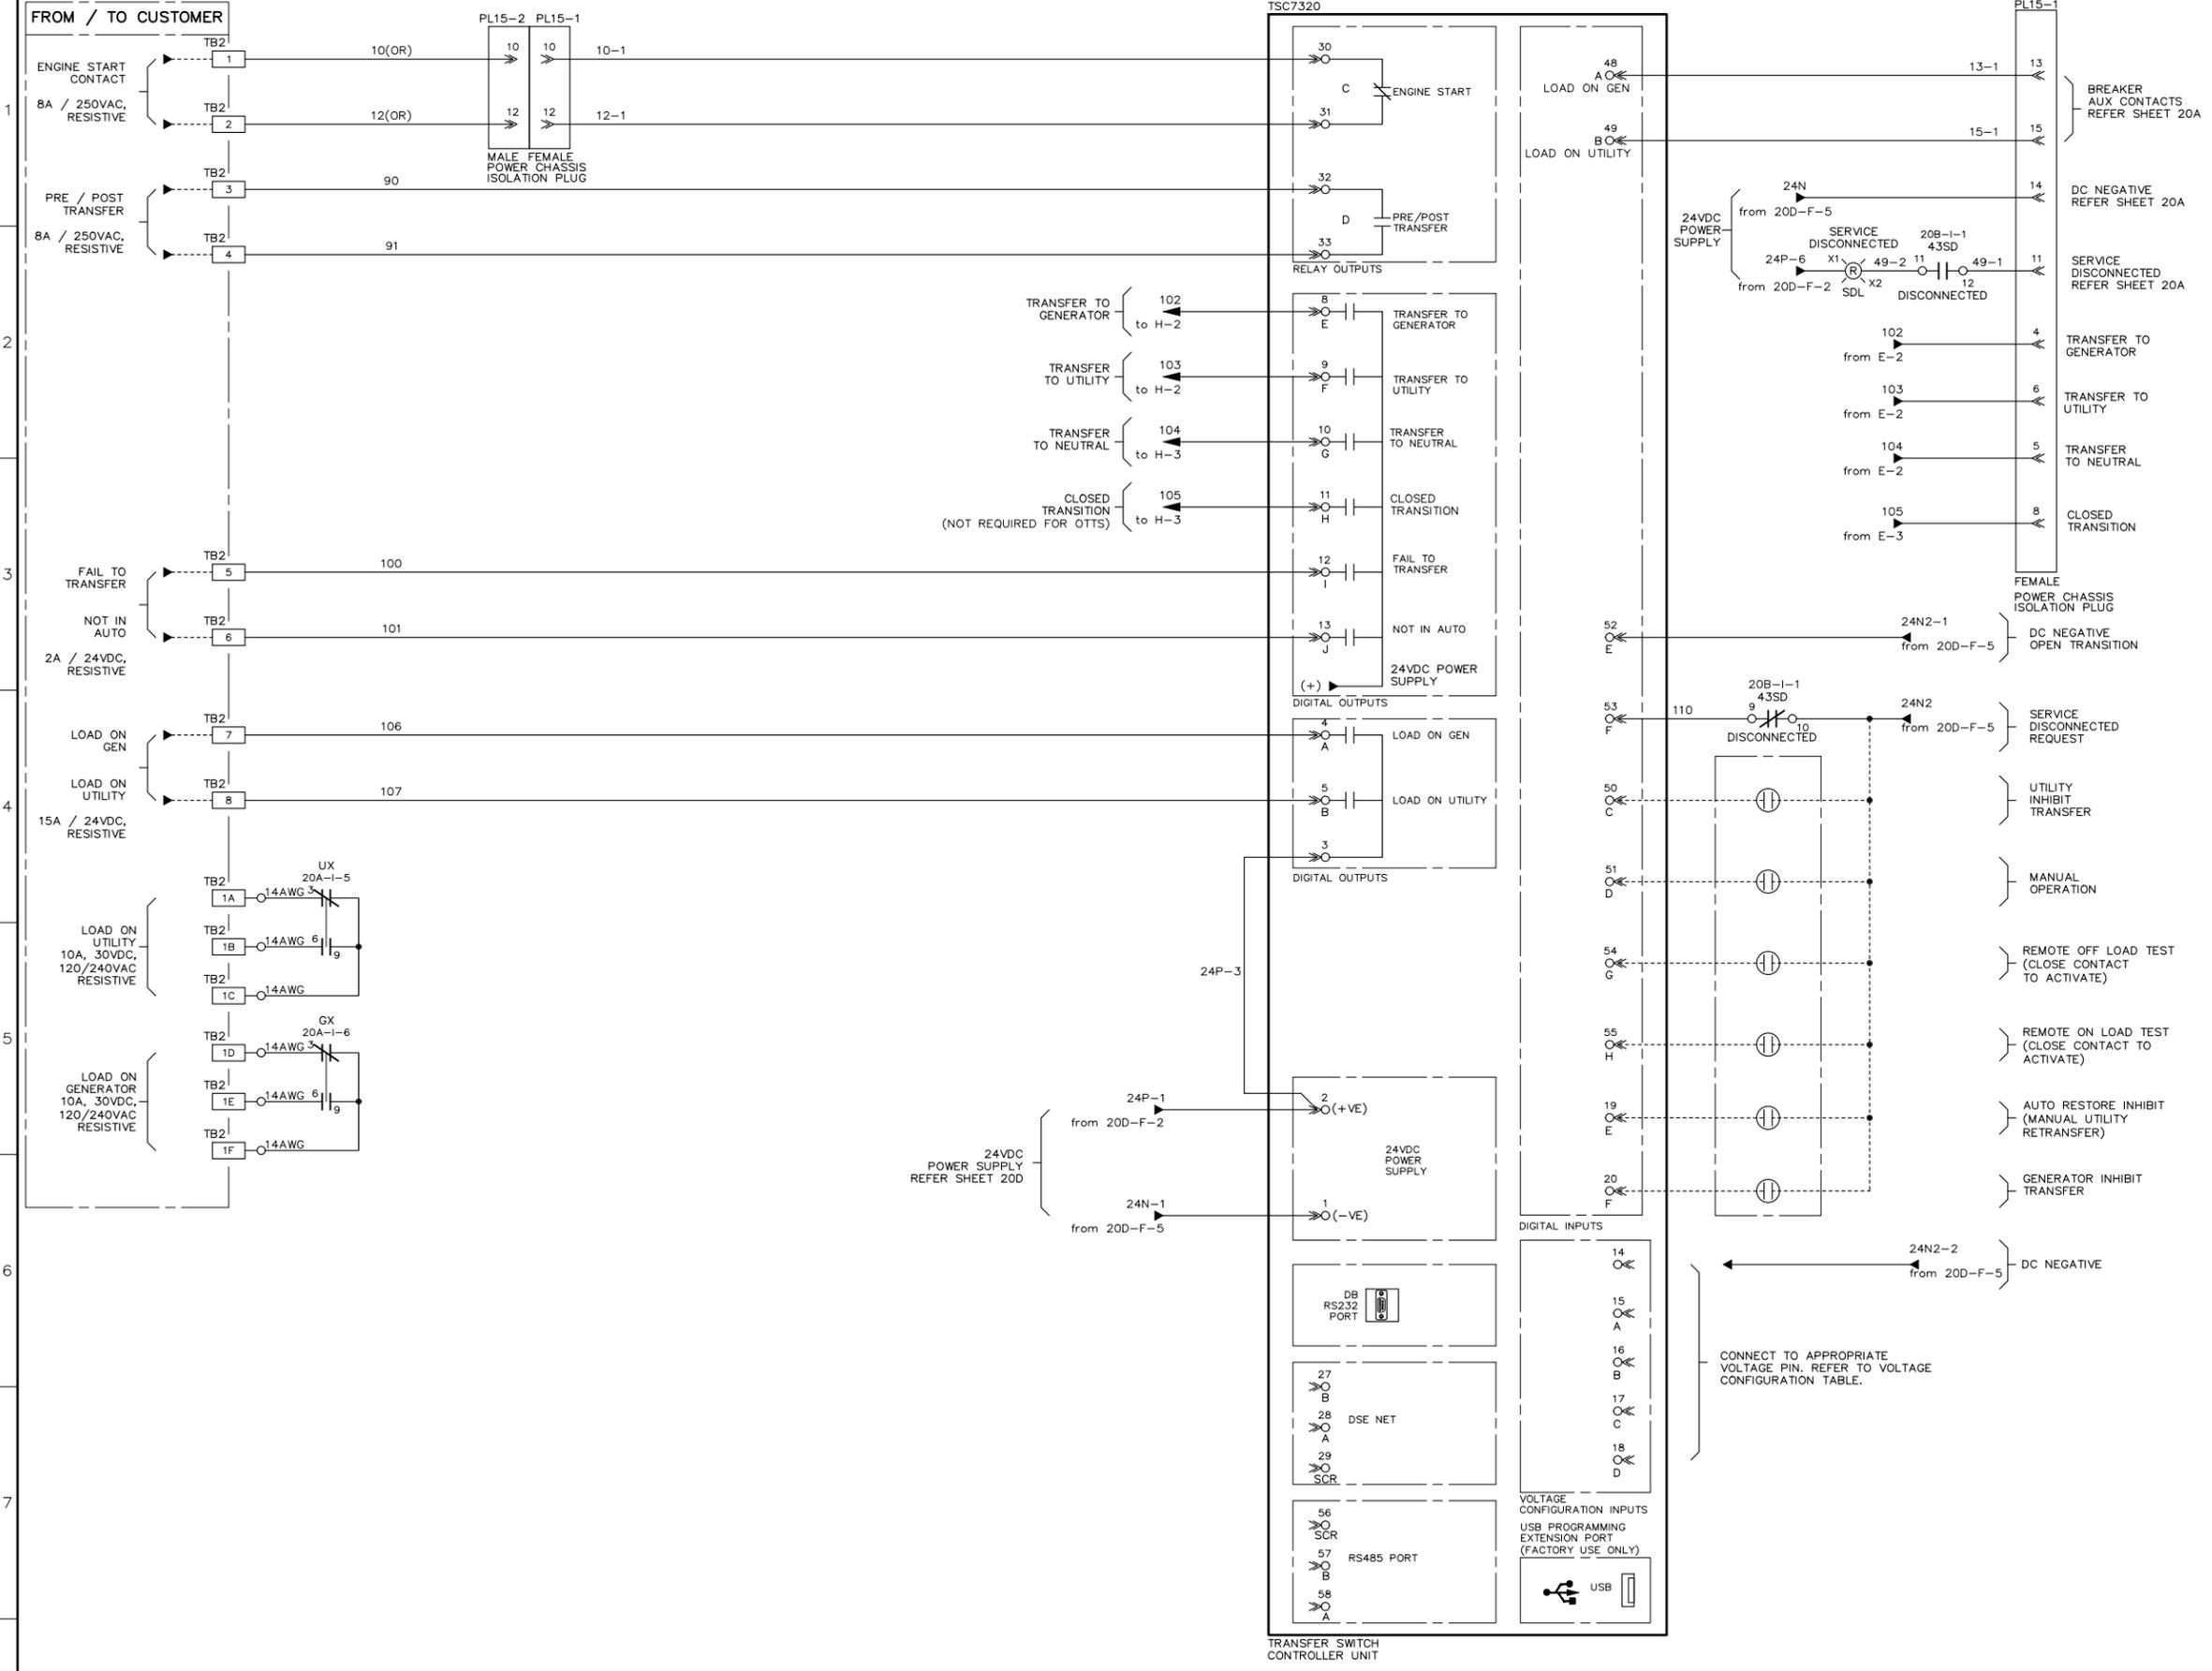

TSC7320 FACTORY DEFAULT SETTINGS

NOTE : REFER TO OPTION DRAWINGS FOR APPLICABLE CHANGES TO FACTORY DEFAULT SETTINGS

PARAMETER	DEFAULT	RANGE
GENERATOR (SOURCE 2) WARM UP DELAY	2 SEC	0-3600 SEC
GENERATOR (SOURCE 2) COOL DOWN DELAY	300 SEC	0-3600 SEC
UTILITY (SOURCE 1) RETURN DELAY	300 SEC	0-3600 SEC
TRANSFER NEUTRAL DELAY	3 SEC	0-300 SEC
EXERCISE TIMER	PROG.	PROG.
GENERATOR (SOURCE 2) UNDER VOLTAGE DELAY	3 SEC	0-60 SEC
GENERATOR (SOURCE 2) UNDER FREQUENCY DELAY	5 SEC	0-60 SEC
UTILITY (SOURCE 1) TRANSIENT DELAY	2 SEC	0-30 SEC

ALL SETTINGS ARE FIELD ADJUSTABLE UNLESS NOTED. REFER TO THE TSC7320 MANUAL FOR A COMPLETE LISTING OF ALL TSC7320 SETTINGS.

VOLTAGE CONFIGURATION

I-#	INPUT FUNCTION	VOLTAGE CONFIGURATION
I-14	DEFAULT	277/480V, 3PH 4W
I-15	INPUT A	120/240V, 1PH 3W
I-16	INPUT B	120/208V, 3PH 4W
I-17	INPUT C	139/240V, 3PH 4W
I-18	INPUT D	347/600V, 3PH 4W

FOR 3PH 3W OR CUSTOM VOLTAGE APPLICATIONS, PLEASE REFER TO THE TSC7320 CONTROLLER MANUAL

COLOR KEY

BK	BLACK
BE	BLUE
BN	BROWN
GN	GREEN
GY	GREY
OR	ORANGE
PE	PURPLE
R	RED
W	WHITE
Y	YELLOW
V	VIOLET

- ### GENERAL NOTES
- COLOR CODE: ALL WIRING IS GREY UNLESS NOTED. SAFETY GROUND WIRES ARE GREEN.
 - WIRE TYPE FOR MOS TRANSFER SWITCH : ALL WIRING SHALL BE 18AWG UNLESS NOTED.
 - WIRE TYPE FOR ICS TRANSFER SWITCH : ALL CONNECTIONS TO BUS & BREAKERS TO BE #14 AWG SIS. CT SECONDARY #10 AWG SIS. WIRING THAT IS TO BE PROVIDED AS A PART OF CONTROL COMPARTMENT SHALL BE #18 AWG UNLESS NOTED.
 - WIRE NUMBERS TO MATCH TERMINAL NUMBERS, UNLESS NOTED.
 - REFER COVER PAGE / SELECTED OPTION LIST FOR PROJECT SPECIFIC DETAILS.
 - ANALOG INPUT GROUND CONNECTIONS MUST BE ON THE ENGINE BLOCK AND MUST BE TO THE SENSOR BODIES.

DRAWINGS SUBJECT TO CHANGE WITHOUT NOTICE.

APPROVED FOR CONSTRUCTION
 MASTER COPY REFERENCE COPY OF _____
 MULTIPLE UNIT WORK ORDER
 RELEASED FOR INFORMATION
 AUTH. BY: _____ DATE: _____

CROSS REFERENCE LEGEND











50C-C-1	GRID COORDINATE	SHEET No.

12	GENERAL NOTES UPDATED	NS	OG	24-09-24
11	UPDATED SD LIGHT WIRE NUMBER <td>NS</td> <td>OG</td> <td>24-01-23</td>	NS	OG	24-01-23
10	UPDATED TB'S FOR CUSTOMER CONNECTION <td>SK</td> <td>OG</td> <td>23-11-08</td>	SK	OG	23-11-08
9	UPDATED LOAD ON UTILITY AND LOAD ON GEN DIGITAL OUTPUT WIRING <td>NS</td> <td>OG</td> <td>23-10-06</td>	NS	OG	23-10-06
8	UPDATED 43SD SWITCH CONTACT DETAILS <td>NS</td> <td>OG</td> <td>23-09-04</td>	NS	OG	23-09-04



AUTOMATIC TRANSFER SWITCH
 MODEL TS 870 / 880
 DC CONTROL SCHEMATIC, CTTs/OTTS, SE
 1000-4000A

DRAWING/FILE No.	SHEET	REV
TSC700E206	20C	12

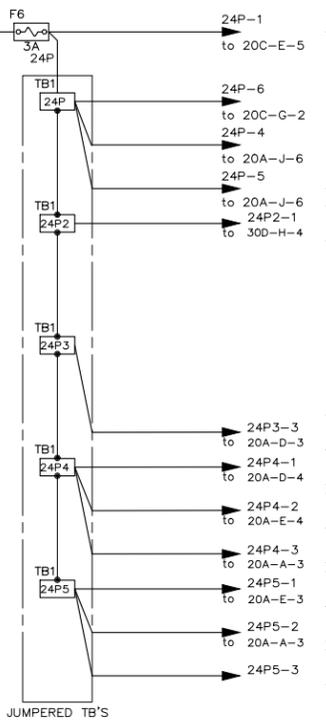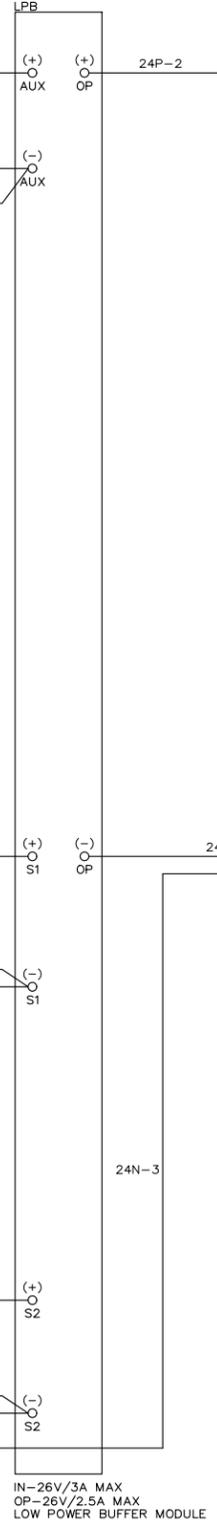

- 24P-1 to 20C-E-5
- 24P-6 to 20C-G-2
- 24P-4 to 20A-J-6
- 24P-5 to 20A-J-6
- 24P2-1 to 20A-J-6
- 24P2-1 to 30D-H-4
- 24P3-3 to 20A-D-3
- 24P4-1 to 20A-D-4
- 24P4-2 to 20A-E-4
- 24P4-3 to 20A-A-3
- 24P5-1 to 20A-E-3
- 24P5-2 to 20A-A-3
- 24P5-3

- 24N-1 to 20C-E-6
- 24N to 20C-G-1
- 24N2 to 20C-H-4
- 24N2-1 to 20C-H-3
- 24N2-2 to 20C-H-6
- 24N3-1 to 30B-F-3
- 24N3-2 to 30D-H-4

- 24N5-1 to 20A-D-4
- 24N5-2 to 20A-D-4
- 24N5-3 to 20A-E-4
- 24N6-1 to 20A-A-3
- 24N6-2 to 20A-E-3
- 24N6-3 to 20A-A-3

GENERAL NOTES	
1	COLOR CODE: ALL WIRING IS GREY UNLESS NOTED. SAFETY GROUND WIRES ARE GREEN.
2	WIRE TYPE FOR MOS TRANSFER SWITCH: ALL CONNECTIONS TO BUS & BREAKERS TO BE #14 AWG SIS. CT SECONDARY #10 AWG SIS. WIRING THAT IS TO BE PROVIDED AS A PART OF CONTROL COMPARTMENT SHALL BE #18 AWG UNLESS NOTED.
3	WIRE NUMBERS TO MATCH TERMINAL NUMBERS, UNLESS NOTED.
4	REFER COVER PAGE / SELECTED OPTION LIST FOR PROJECT SPECIFIC DETAILS

DRAWINGS SUBJECT TO CHANGE WITHOUT NOTICE.

APPROVED FOR CONSTRUCTION
 MASTER COPY REFERENCE COPY OF _____
 MULTIPLE UNIT WORK ORDER
 RELEASED FOR INFORMATION
 AUTH. BY: _____ DATE: _____

CROSS REFERENCE LEGEND	
50C-C-1	GRID COORDINATE
_____	SHEET No.
_____	DRAWING No.
_____	REFERENCE DRAWINGS
_____	No.

REVISIONS	
No.	DATE
3	25-01-20
2	25-01-10
1	24-12-04
0	24-09-13



AUTOMATIC TRANSFER SWITCH
 MODEL TS 870 / 880
24VDC POWER SUPPLY SCHEMATIC
 1000 - 4000A

DRAWINGS AND OR OTHER TECHNICAL INFORMATION SUPPLIED BY THOMSON POWER SYSTEMS AS A PART OF A SALE OF EQUIPMENT ARE FOR THE PURCHASER'S USE SOLELY IN CONJUNCTION WITH THAT EQUIPMENT, UNLESS SPECIFICALLY AGREED TO OTHERWISE AS A PART OF THE TERMS OF SALE.		
DRAWING/FILE No. TSC700E212_VA1	SHEET 20D	REV 3

TS 880

AUTOMATIC TRANSFER SWITCH WITH TSC 7320 CONTROLLER

INSTALLATION, OPERATING & SERVICE MANUAL

1. PRODUCT REVISION HISTORY	4
2. EQUIPMENT STORAGE	4
2.1. ENVIRONMENTAL CONDITIONS	4
3. NOTES TO INSTALLER	5
3.1. UPSTREAM CIRCUIT PROTECTIVE DEVICES/ELECTRICAL CONNECTIONS	5
3.2. TRANSFER SWITCHES WITH INTEGRAL OVER CURRENT PROTECTION	5
3.3. TRANSFER SWITCHES WITH MULTI-TAP VOLTAGE CAPABILITY	6
3.4. REMOTE START CONTACT FIELD WIRING	6
3.5. DIELECTRIC TESTING	7
3.6. MOUNTING OF ENCLOSED TRANSFER SWITCHES	7
3.7. PRODUCT MODEL CODE	11
4. AUTOMATIC SEQUENCE OF OPERATION	12
4.1. STANDARD ATS - OPEN TRANSITION	12
4.2. STANDARD ATS - CLOSED TRANSITION	13
4.3. SERVICE ENTRANCE ATS	17
4.4. TEST MODES	20
5. OVER CURRENT PROTECTION	21
5.1. STANDARD TS 880 AUTOMATIC TRANSFER SWITCH	21
5.2. OPTIONAL TS 880 ATS WITH INTEGRAL OVER CURRENT PROTECTION	21
6. SERVICING TRANSFER SWITCH MECHANISMS	22
6.1. SERVICING INSULATED CASE TYPE TRANSFER MECHANISMS	22
7. TRANSFER SWITCH MECHANISM OPERATION	24
7.1. GENERAL DESCRIPTION	24
8. MANUAL OPERATION	25
9. FRONT VIEW (TYPICAL) INSULATED CASE TYPE TRANSFER MECHANISM	33
10. CABLE TERMINAL INFORMATION	35
11. REQUIREMENTS FOR UPSTREAM CIRCUIT PROTECTIVE DEVICES	36



11.1.	WITHSTAND CURRENT RATINGS (STANDARD 3 CYCLE MODELS)	36
11.2.	INTERRUPTING CAPACITY CURRENT RATINGS (STANDARD 3 CYCLE MODELS)	37
11.3.	WITHSTAND CURRENT RATINGS (30 CYCLE MODELS)	38
11.4.	INTERRUPTING CAPACITY CURRENT RATINGS (30 CYCLE MODELS)	39
12.	GROUND FAULT SITE TEST REQUIREMENTS	40
12.1.	PERFORMANCE TEST	40
13.	POWER SWITCHING DEVICE TROUBLESHOOTING	46
14.	POWER SWITCHING DEVICE DETAILS	48
15.	POWER SWITCHING DEVICE ELECTRICAL DIAGRAMS	52
16.	REPLACEMENT PARTS	60
17.	PRODUCT RETURN POLICY	61
18.	NOTES	62
19.	PERFORMANCE TEST FORM	63
APPENDIX A – TYPICAL TS 880 ATS COMMISSIONING PROCEDURE		
APPENDIX B – TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE		
APPENDIX C – SEISMIC CERTIFICATE		



1. PRODUCT REVISION HISTORY

The following information provides an historical summary of changes made to this product since the original release.

Operating & Service Manual Version

PM178 Rev 0 23/02/20	Original release
----------------------	------------------

Contact Thomson Power Systems, to obtain applicable instruction manuals or if in doubt about any matter relating to installation, operation or maintenance. Soft copy of the most current version is available at www.thomsonps.com.

NOTE: All information contained in this manual is for reference only and is subject to change without notice.

Related Product Instruction Manuals

- TSC 7320 Transfer Switch Controller, PM180

Contact Thomson Power Systems, to obtain these instruction manuals. Soft copy of the most current versions of these manuals are available at www.thomsonps.com.

2. EQUIPMENT STORAGE

The following procedures are required for correct storage of the transfer switch prior to installation.

2.1. ENVIRONMENTAL CONDITIONS

CAUTION

Failure to store and operate equipment under the specified environmental conditions may cause equipment damage and void warranty.

2.1.1. EQUIPMENT STORAGE

The transfer switch shall be stored in an environment with a temperature range not exceeding -4° to +158° Fahrenheit (-20° to +70° Celsius) and a humidity range not exceeding 5%-95% non-condensing. Before storing, unpack sufficiently to check for concealed damage. If concealed damage is found, notify the ATS supplier and the Carrier immediately. Repack with the original or equivalent packing materials. Protect from physical damage. Do not stack. Store indoors in a clean, dry, well ventilated area free of corrosive agents including fumes, salt and concrete/cement dust. Apply heat as necessary to prevent condensation.

2.1.2. EQUIPMENT OPERATING

The transfer switch shall be operated in an environment with a temperature range not exceeding +5° to +122° Fahrenheit (-15° to +50° Celsius) and a humidity range not exceeding 5%-95% non-condensing.

3. NOTES TO INSTALLER

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death

3.1. UPSTREAM CIRCUIT PROTECTIVE DEVICES/ELECTRICAL CONNECTIONS

To ensure satisfactory installation of this equipment be sure to observe Cable Terminal Information regarding power cable connection tightness and Requirements for Upstream Circuit Protective Devices located in this manual.

All mechanical and electrical connections must be checked for tightness prior to placing this equipment in service to ensure proper operation and to validate applicable warranty coverage.

3.2. TRANSFER SWITCHES WITH INTEGRAL OVER CURRENT PROTECTION

For models of transfer switch with integral over current protection, the over current protection must be set prior to operation. The equipment will be shipped from the factory with a long-time current setting of 100%, of the equipment rating, and maximum short-time/instantaneous current and time delay settings.

WARNING

Do Not Energize this equipment until device settings have been verified to ensure proper system protection & coordination. Failure to do so may result in equipment failure.

Refer to [SECTION 4.3.2](#) of this manual for additional information on operation of the Transfer switch following an over current trip condition.

Refer to information supplied with the transfer switch documentation package for adjustment procedures on the power switching units over current protection trip unit. Contact the factory if any additional information is required.

3.3. **TRANSFER SWITCHES WITH MULTI-TAP VOLTAGE CAPABILITY**

If the transfer switch has programmable multi-tap voltage capability (refer to engineered drawings), confirm the transfer switch has been configured for the correct system voltage prior to installation.

WARNING

Failure to confirm and match transfer switch voltage with the system voltage could cause serious equipment damage.

The voltage selections and connections are shown on the engineered drawings attached to each transfer switch. The factory default settings will be indicated on the calibration label attached on the inside of the enclosure door (supplied loose on open style models). A blank label is included to record the applicable settings if the configuration is changed from the factory default settings.

To change the transfer switch voltage, refer to Instructions To Change System Voltage On TS 880 Series Transfer Switches With TSC 7320 Controller, attached as Appendix B. Contact Thomson Power Systems for further information as may be required.

3.4. **REMOTE START CONTACT FIELD WIRING**

As a minimum, the remote engine start control field wiring shall conform to the local regulatory authority on electrical installations. Field wiring of a remote start contact from a transfer switch to a control panel should conform to the following guidelines to avoid possible controller malfunction and/or damage.

3.5.1. Minimum #14 AWG (2.5mm²) wire size shall be used for distances up to 100ft (30m)¹). For distances exceeding 100 ft. (30m) consult Thomson Power Systems

3.5.2. Remote start contact wires should be run in a separate conduit.

3.5.3. Avoid wiring near AC power cables to prevent pick-up of induced voltages.

3.5.4. An interposing relay may be required if field-wiring distance is excessively long (i.e. greater than 100 feet (30m)) and/or if a remote contact has a resistance of greater than 5.0 ohms.

3.5.5. The remote start contact must be voltage free (i.e. dry contact). The use of a Powered contact will damage the transfer controller.

3.5. DIELECTRIC TESTING

Do not perform any high voltage dielectric testing on the transfer switch with the TSC 7320 controller connected into the circuit as serious damage will occur to the controller. All AC and DC control fuses and control circuit isolation plugs connected to the TSC 7320 must be removed if high voltage dielectric testing is performed on the transfer switch.


3.6. MOUNTING OF ENCLOSED TRANSFER SWITCHES

Model TS880 Automatic Transfer Switches and Automatic Transfer and Bypass Isolation Switches in Standard enclosures are seismic certified under AC156 building code for non-structural components.


Standard enclosures are all transfer switch enclosures Thomson Power Systems offers in NEMA 1, NEMA 2, NEMA 3R and NEMA 4X for the above listed product. If a customer requests a custom enclosure, it would not be covered under the generic certificate; if certification were a requirement then consult factory before ordering.

The Automatic Transfer Switches are qualified to the highest known level in North America; based on site class D. Specifically, this is a spectral acceleration of 200%.

The transfer switch must be installed per the anchoring details provided for seismic qualification. The equipment can be mounted in alternate means and still qualify if a qualified Civil Engineer designs the alternate method of anchoring.

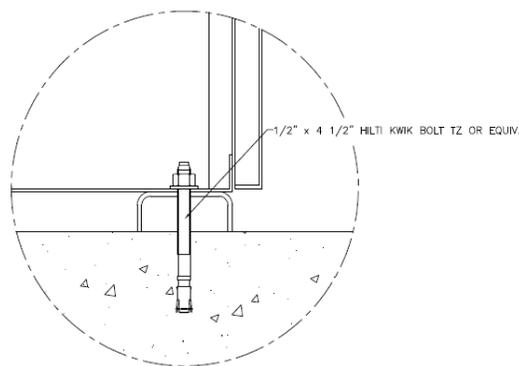

TYP. FLOOR ANCHORING

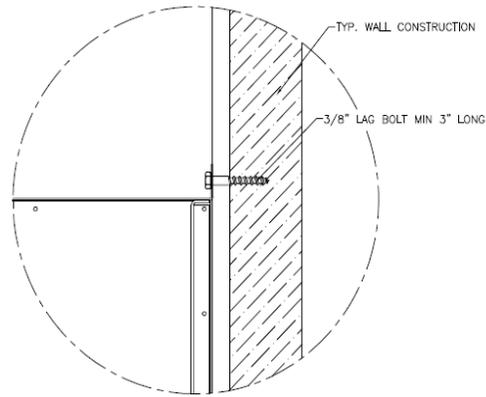

TYP. WALL ANCHORING

Anchoring Notes:


1. Anchoring must be designed according to IBC 2012 or latest version.
2. The anchoring details shown are recommended according to the seismic certification; design Engineer may use alternate anchors within the scope of IBC.
3. Wall anchors in concrete; use a typical concrete anchor as necessary.
4. Expansion anchors as shown. To be installed according to manufacturer's recommendation.

GENERAL DESCRIPTION

Thomson Power Systems TS 880 series of Automatic Transfer Switches employ two mechanically interlocked enclosed contact power switching units and a microprocessor based controller to automatically transfer system load to a generator supply in the event of a utility supply failure. System load is then automatically re-transferred back to the utility supply following restoration of the utility power source to within normal operating limits.

The standard TS 880 series Automatic Transfer Switch is rated for 100% system load and requires upstream over current protection. The TS 880 Automatic Transfer Switch may be supplied with optional integral over current protection within the enclosed contact power switching units for applications such as Service Entrance Rated equipment. Refer to [SECTION 5](#) of this manual for detailed information on over current protection.

The TS 880 series transfer switches employs a TSC 7320 Microprocessor Based controller which provides all necessary control functions for fully automatic operation. The controller is equipped with 2.3" back-lit LCD display which provides operating status and controls.

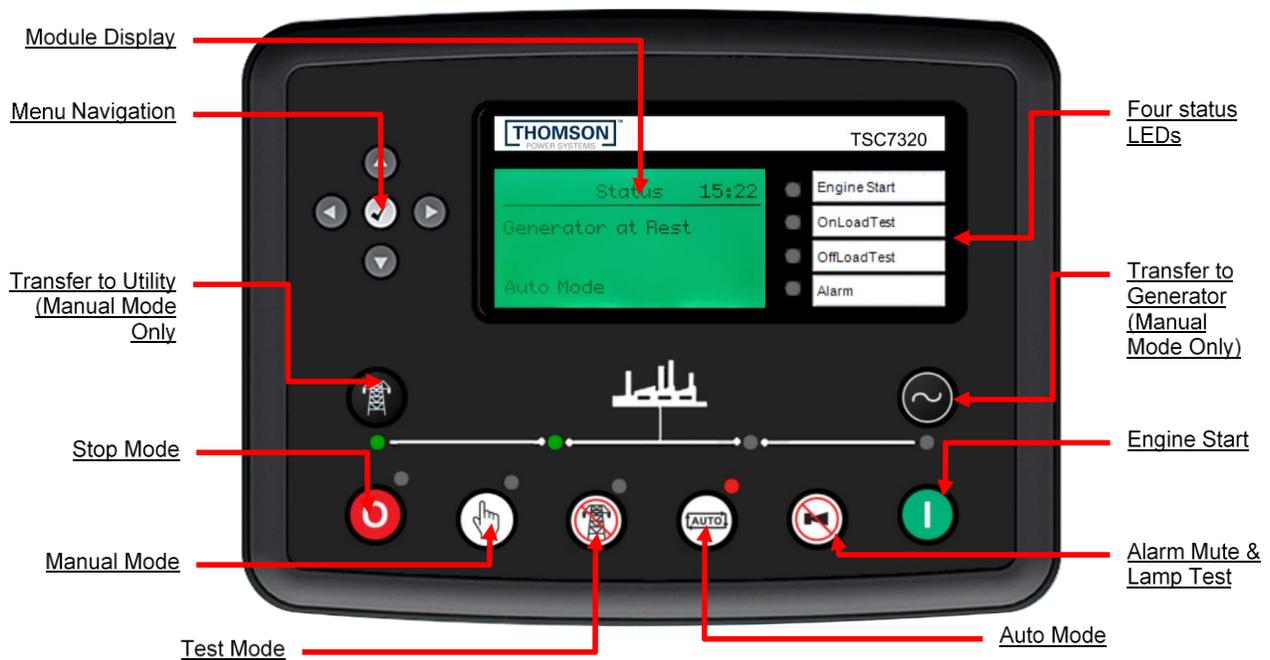

For further information on the TSC 7320 Transfer Controller, refer to instruction manual PM180.

800A - 4000A rated insulated case power switching devices used for the utility and generator sources are operated by internal drive motor operators. The transfer switch mechanism utilizes the power from the source to which the electrical load is being transferred. The mechanism provides a positive mechanical interlock to prevent both power switching units from being closed at the same time, which allows an interrupted open transition “break-before-make” transfer sequence. For transfer switches supplied with Closed Transition transfer option, the mechanical interlock is removed thereby allowing a “make-before break” transfer sequence when both sources of power are available. The TSC 7320 transfer controller provides a standard neutral position delay timer for open transition transfer sequences to allow adequate voltage decay during transfer operation to prevent out of phase transfers.

NOTE

For the purpose of this manual, the following standard nomenclature is utilized:

Utility: to indicate the source of primary power

Generator: to indicate the source of standby power

Power Switching Device: to indicate the Automatic Transfer Switch power switching device

3.7. PRODUCT MODEL CODE

The type of TS 880 series transfer switch supplied is identified by way of a 21-digit product code which appears on the equipment rating plate, or Model, on the door of the transfer switch, and on the transfer switch drawings. The model code structure and definitions are as follows:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
T	S		8	8																

1-3. SERIES

TS - TRANSFER SWITCH

4 & 5. MODEL

88 - 880 SWITCH

6. POLES

3 - 3 - POLES
4 - 4 - POLES

7. CONFIGURATION TYPE

A - ATS
B - BYPASS/ISOLATION ATS
X - SPECIAL

8 - 11. AMPERAGE

800
1000
1200
1600
2000
2500
3000
3200
4000

12. APPLICATION

A - STANDARD
B - SERVICE ENTRANCE
C - DUAL UTILITY CONTROL
D - DUAL STANDBY GEN (Slave ATS)
E - 30 CYCLE STANDARD
F - 30 CYCLE SERVICE ENTRANCE
G - 30 CYCLE DUAL UTILITY (DU)
H - DUAL PRIME GEN CONTROL
I - 30 CYCLE DUAL STANDBY GEN (DSG)
J - 30 CYCLE DUAL PRIME GEN (DPG)
X - SPECIAL

13. OPERATION TYPE

1 - OPEN TRANSITION
2 - MANUAL ELEC. OP.
3 - CLOSED TRANSITION (MOMENTARY)
4 - CLOSED TRANSITION (SOFT LOAD)
X - SPECIAL

14. SAFETY STANDARD

A - UL 1008 (Service Entrance)
C - UL 1008 / CSA 178
X - NOT APPLICABLE

15. VOLTAGE

3Ø 4 WIRE (GROUNDED NEUTRAL)
E - 120/208¹
F - 127/220
G - 120/240¹ (DELTA)
H - 220/380²
S - 230/400²
J - 240/416
K - 254/440
M - 277/480¹
N - 347/600¹

3Ø 3 WIRE

P - 208
Q - 220
R - 240
U - 416
V - 480
W - 600
X - SPECIAL

16. CONTROLLER

5 - TSC 900 c/w GHC GRAPHIC DISPLAY
6 - TSC 7320 c/w LCD DISPLAY
7 - NONE (MANUAL)

17. ENCLOSURE TYPE

A - NEMA1, ASA #61 GRAY
B - NEMA2, ASA #61 GRAY
C - NEMA12, ASA #61 GRAY
D - NEMA3R SD, ASA #61 GRAY
E - NEMA3R DD, ASA #61 GRAY
F - NEMA3RX / 4X DD
(304 STAINLESS STEEL)
G - NONE (OPEN STYLE)
H - NEMA 4X SD
(304 STAINLESS STEEL)
K - NEMA 4X SD
(316 STAINLESS STEEL)
L - NEMA3RX / 4X DD
(316 STAINLESS STEEL)
X - SPECIAL

18. UTILITY SWITCHING DEVICE

Q - INSULATED CASE, FIX MOUNT SWITCH
R - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC TRIP
T - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC & GF TRIP
U - INSULATED CASE DRAW-OUT SWITCH
V - INSULATED CASE DRAW-OUT SWITCH
C/W ELECTRONIC TRIP
W - INSULATED CASE, DRAW-OUT SWITCH
C/W ELECTRONIC & GF TRIP
X - SPECIAL

19. GENERATOR SWITCHING DEVICE

Q - INSULATED CASE, FIX MOUNT SWITCH
R - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC TRIP
T - INSULATED CASE, FIX-MOUNT SWITCH
C/W ELECTRONIC & GF TRIP
U - INSULATED CASE DRAW-OUT SWITCH
V - INSULATED CASE DRAW-OUT SWITCH
C/W ELECTRONIC TRIP
W - INSULATED CASE, DRAW-OUT SWITCH
C/W ELECTRONIC & GF TRIP
X - SPECIAL

20. POWER CONNECTIONS

A - STANDARD
C - ATS CONNECTION PLATE 800A
D - ATS CONNECTION PLATE 1000/1200A
F - ATS CONNECTION PLATE 800A - U & G
G - ATS CONNECTION PLATE 1000/1200A - U & G
H - ATS CONNECTION PLATE 1600A
I - ATS CONNECTION PLATE 2000A
J - ATS CONNECTION PLATE 2500A
K - ATS CONNECTION PLATE 3000/3200A
L - ATS CONNECTION PLATE 4000A
X - SPECIAL

21. ATS CONNECTION CONFIGURATION⁶

A - STANDARD
E - ALTERNATE E
F - ALTERNATE F
G - ALTERNATE G
X - SPECIAL

NOTES:

¹ MULTI-VOLTAGE CAPABLE
² FOR 50 Hz APPLICATION
⁶ FOR BYPASS SWITCH APPLICATIONS
REFER TO FACTORY

TYPICAL COMMISSIONING PROCEDURES

CAUTION

Commissioning procedures must be performed by qualified personnel only. Ensure the Automatic Transfer Switch (ATS) ATS Power Chassis & Voltage Sensing Isolation Plugs PL12 & PL15 are disconnected prior to energizing the supply sources. Manually place the transfer switch mechanism in the neutral position prior to applying power. Failure to do so may result in equipment failure or personal injury.

NOTE: The Typical Automatic Transfer Switch Commissioning Procedures Model Series TS 880, attached as Appendix A, is provided for general information only pertaining to typical site installations and applications. Contact Thomson Power Systems for further information as may be required.

4. AUTOMATIC SEQUENCE OF OPERATION

4.1. STANDARD ATS - OPEN TRANSITION

When utility supply voltage drops below a preset nominal value (adjustable from 50% to 95% of nominal) on any phase, an engine start delay circuit is initiated and the transfer to utility supply signal will be removed (i.e. contact opening). Following expiry of the engine start delay period (adjustable from 0 to 30 sec.) an engine start signal (contact closure) will be given.

Once the engine starts, the transfer switch controller will monitor the generator voltage and frequency. Once the generator voltage and frequency rises above preset values (adjustable from 70% to 99% of nominal), the engine warmup timer will be initiated. Once the warmup timer expires (adjustable from 0 to 60 min.), the transfer to Generator Supply signal (contact closure) will be given to the transfer switch mechanism. The load will then transfer from the utility supply to the generator supply via the motor operated mechanism.

NOTE: A neutral delay timer circuit will delay the transfer sequence in the neutral position (i.e. both power switching devices open) until the selected time expires (adjustable from 0 to 120 sec.).

The generator will continue to supply the load until the utility supply has returned. The retransfer sequence is completed as follows: when the utility supply voltage is restored to above the preset values (adjustable from 70% to 99% of nominal) on all phases, a utility return delay circuit will be initiated. Following expiry of the Utility Return Timer (adjustable from 0 to 30 min.), the Transfer to Generator Supply signal will be removed (contact opening), and then the Transfer to Utility Supply signal (contact closure) will be given to the transfer switch

mechanism. The load will then retransfer the load from the generator supply back to the utility supply.

NOTE: A neutral delay timer circuit will delay the transfer sequence in the neutral position (i.e. both power switching devices open) until the neutral delay time period expires.

An engine cooldown timer circuit will be initiated once the load is transferred from the generator supply. Following expiry of the cooldown delay period (adjustable from 0 to 60 minutes), the engine start signal will be removed (contact opening) to initiate stopping of the generator set.

4.2. STANDARD ATS - CLOSED TRANSITION

NOTE: This section applies only to Closed Transition configured transfer switches.

For transfer switches equipped with the Closed Transition transfer option, the ATS is configured to operate as follows:

Under normal closed transition operating conditions, the transfer switch operates automatically during a failure and restoration of utility power and does not require operator intervention.


When utility supply voltage drops below a preset nominal value (50 – 95% of rated adjustable) on any phase, an engine start delay circuit will be initiated and the transfer to utility supply signal will be removed (i.e. contact opening). Following expiry of the engine start delay period (0 - 30 sec. adjustable) an engine start signal (contact closure) will be given.

Once the engine starts, the transfer switch controller will monitor the generators voltage and frequency levels. Once the generator voltage and frequency rises above preset values (50 – 95% nominal adjustable) a warmup time delay will be initiated. Once the warmup timer (0-60 Min adjustable) expires, the transfer to generator supply signal (contact closure) will be given to the transfer switch mechanism. The load will then transfer from the utility supply (i.e. opening the utility power switching device) to the generator supply (closing the generator power switching device) via motor driven mechanism to complete a break-before-make open transition transfer sequence.

The generator will continue to supply the load until the utility supply has returned and the retransfer sequence is completed as follows: When the utility supply voltage is restored to above 90% of nominal voltage on all phases, a re-transfer sequence will be initiated once the Utility Return timer expires. The utility will close its power switching device when it is in synchronism with the generator supply utilizing the TSC 7320 in-phase monitor. The generator power switching device will immediately trip open approximately 50-100 milliseconds after the utility power switching device closes to complete the make-before-break re-transfer sequence.

An engine cooldown timer circuit will be initiated once the load is transferred from the generator supply. Following expiry of the cooldown delay period (0 - 60 min. adjustable) the engine start signal will be removed (contact opening) to initiate stopping of the generator set.

Closed Transition Operation Sequence Diagram (Normal Power Failure & Return Sequence)

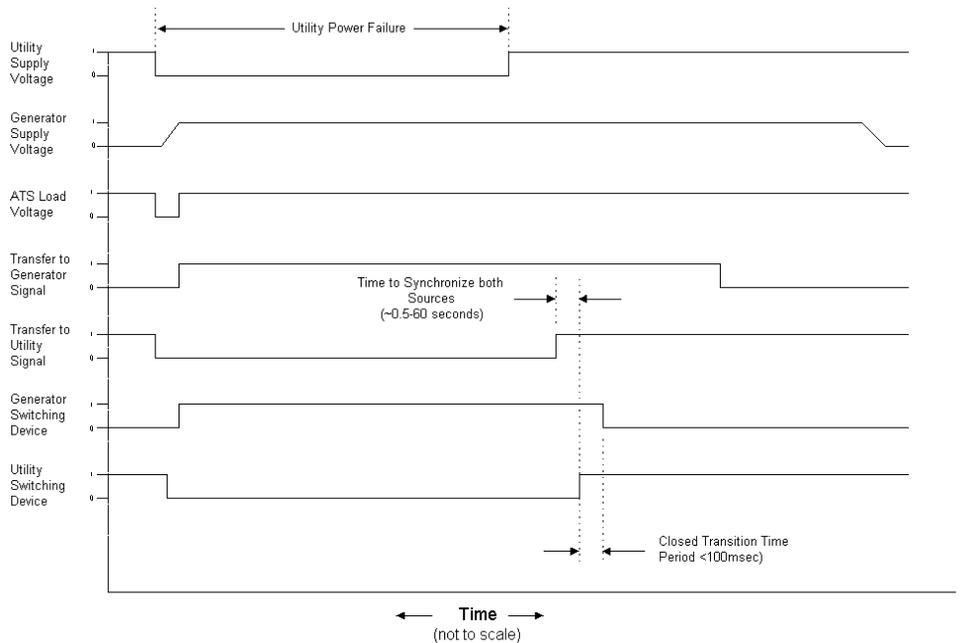

The following operating sequences and time delays are associated with closed transition type transfer switches which momentarily parallel two sources of supply for less than 100 milliseconds. For closed transition type transfer switches, which utilize extended parallel operation for soft-loading operating sequences, refer to separate instruction manual.




1. Transfer Control Switch (Open/Closed Transition): A two position selector switch is provided on the front of the transfer switch for operator selection of desired operation. The two positions are as follows:
 - OPEN TRANSITION: The transfer switch will operate in a break-before-make open transition sequence during load transfers. A programmed neutral delay period will occur during the transfer sequence to ensure voltage decays on the load bus before load is re-applied. The two sources will not be paralleled at any time during operation in this mode.
 - CLOSED TRANSITION: When both sources of supply are available, the transfer switch will operate in a make-before-break closed transition sequence during load transfers.

NOTE: If only one source of supply is available during an initiated transfer sequence, the control system will automatically revert to an open transition transfer sequence.

2. Synchronizing Protection: To ensure both sources are in synchronism prior to initiating a closed transition transfer sequence, a TSC 7320 in-phase monitor is used. The controller has a Sync page to allow monitoring of phase and voltage of the 2 sources. The built-in sync check relay will block a closed transition transfer sequence until both sources phase angle and voltages are within programmed limits. The synch check relay settings are factory programmed to the following:

Factory Settings:

Frequency Delta:	±0.5Hz
Voltage Delta:	30V PhN
Phase Angle Delta:	10°



NOTE: The standard closed transition transfer switch does not contain an automatic synchronizer to control the generators frequency or voltage to bring it within limits of the sync check relay. For correct closed transition transfer operation, the system requires the generators frequency to be set within 0.25% of nominal frequency and the generators voltage to be set within 0.5% of nominal voltage.

3. Closed Transition Time Period: The time period in which both sources of supply are paralleled together during the closed transition transfer sequence is 50-100 milliseconds (maximum). The time period is inherently controlled by operation of auxiliary contacts from the power switching devices (i.e. when one switching devices closes, its aux contact closes to initiate tripping of the opposite switching device).

4. Closed Transition Failure Mode Operation: The TSC 7320 continually monitors the closed transition operation time period. The TSC 7320 is factory set for 100 milliseconds that allows normal closed transition operation (i.e. both power switching devices remain closed for less than 100 milliseconds). The alarm circuit is not activated under normal operation. Should the closed transition operation time exceed 100 milliseconds (i.e. both power switching devices remain closed for longer than the normal closed transition time period plus the setting of TSC 7320 timer, the following sequence of events will occur:

- TSC 7320 time delay period will expire and will activate auxiliary trip relay.
- If the transfer switch was transferring power from the generator source to the utility source and the generator switching device failed to open, an auxiliary trip relay will trip open the utility power switching device to immediately separate the two power sources. If the transfer switch was transferring power from the utility source to the generator source and the utility switching device failed to open, an auxiliary trip relay will trip open the generator power switching device to immediately separate the two power sources.

NOTE: The maximum time period both sources will remain paralleled under this failure mode is 200 milliseconds.

- The original source (i.e. prior to the transfer sequence) will remain on load, separated from the other source. TSC 7320 controller will indicate a failure condition which must be manually reset before the transfer switch will re-attempt subsequent transfers. For further information on the TSC 7320 features and operation, refer to the separate product instruction manual.

NOTE: Should the TSC7320 fail to separate the 2 sources under 350msec, a secondary paralleling timer relay will issue a trip signal to both power switching devices. The maximum time period both sources will remain paralleled under this failure mode is 500 milliseconds.

Two alarm contacts are provided for the Closed Transition Failure Mode (i.e. one for a failed generator power switching device and one for the utility power switching device. The contacts are for customer use to remotely trip open upstream devices should an abnormal condition persist.

5. Transfer Fail Alarm (Switching Device Fail to Close): The TSC 7320 provides a timer detect and alarm abnormal operating conditions. Should a power switching device fail to close for any reason within a 5-minute time period, an alarm light and alarm relay contact will be activated. For further information on the TSC 7320 features and operation, refer to the separate product instruction manual.

4.3. SERVICE ENTRANCE ATS

NOTE: This applies only to service entrance transfer switches

4.3.1. NORMAL OPERATION

Under normal conditions, the load is energized from the utility supply through the closed utility transfer power switching device. If the utility power fails, the generator will start and the load will be re-energized via the closed generator transfer power switching device.

In the normal operating mode, the Service Disconnect switch shall be in the Energized position.

4.3.2. OVER CURRENT TRIP

Should the utility power switching device trip open due to an over current condition, TSC 7320 transfer controller will initiate an engine start signal and will permit transfer of the load to the generator supply. The utility source will be locked out and the load will remain on the generator supply until the TSC 7320 alarm signal is manually reset.

Should the generator power switching device trip open due to an over current condition, TSC 7320 transfer controller will initiate transfer of the load to the utility supply. The generator source will be locked out and the load will remain on the utility supply until the TSC 7320 alarm signal is manually reset.

4.3.3. SERVICE DISCONNECT PROCEDURE

To perform a service disconnect (i.e. to disconnect the utility and generator supplies), the following procedure is required:

- a. Move the Service Disconnect control switch located on the door of the transfer switch to the "Transfer to Neutral Position" position.
- b. Once the ATS has transferred to the neutral position, move the Service Disconnect control switch to the Disconnected position.
- c. Verify that the Service Disconnected pilot light is illuminated. If the Light is illuminated, the service has been successfully disconnected and it is safe to perform any maintenance procedures as required. In this condition, the transfer switch is in the neutral position, with both utility and generator transfer power switching devices open. The transfer switch will remain in this condition, regardless of condition of the utility and generator supplies.
NOTE: If the Service Disconnect Light is not illuminated, additional procedures are required (refer to the following procedure #4.3.4).
- d. Attach safety lockout padlock to the Service Disconnect control switch to prevent unauthorized change in operating condition and verify transfer

switch door is locked closed. If the door is not locked, turn and remove door key.

WARNING

Close and lock the transfer switch enclosure door before connecting power sources.

- e. To re-energize the load, remove the padlock(s) from the service disconnect control switch, and move the switch to the Energized position. The transfer switch will immediately return to the utility or generator supply if within normal operating limits.

4.3.4. ADDITIONAL SERVICE DISCONNECT PROCEDURES

If the Service Disconnected pilot light is not illuminated, the service will not have been successfully disconnected and therefore it is not safe to perform any maintenance until the following additional procedures are performed:

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death.

1. Visually inspect the actual position of the transfer switch power switching devices. If both power switching devices indicate they are open, the transfer switch is clearly in the Neutral Position, the service has been successfully disconnected. Proceed to Step. 4.

If either power switching device is not in the Open position, or the load bus is energized, further procedures are required.

NOTE: If the power switching devices are both Open, the Service Disconnected pilot light may not have illuminated due to the following reasons:

- a) Utility and generator supply voltages are not present (the pilot light requires AC supply voltage to be present).
- b) The pilot light may be burnt out. The bulb should be immediately replaced with a 6Vdc rated LED bulb.

- c) Failure of one or more of the sensing/logic contacts. A qualified service technician is required to trouble shoot this specific condition. Switch the utility control circuit isolation switch to the de-energized position to remove utility control power. To isolate the ATS Power Chassis & Voltage Sensing circuits, remove the isolation plugs PL12 and PL15.

NOTE: The AC power conductors will remain energized. Once all the control and voltage sensing circuits are de-energized and isolated the Service Disconnected pilot light will not illuminate due to loss of control power.

NOTE: To return the transfer switch back to normal operation, the utility control circuit disconnect switch and ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 & PL 15) must be switched on and reconnected for correct operation.

2. If the position of both power switching units are not in the Open position, the power switching units must be manually operated as follows. To operate manually, push the power switching units Open pushbutton. The unit should then open. Repeat for the other power switching unit.
3. Close all transfer switch doors securely using a suitable tool. Lock the door in the closed position and remove the key.

WARNING

Failure to move the mechanism to the Neutral Position may result in serious personal injury or death due to electrical shock.

4. Attach a safety lockout padlock to the service disconnect control switch to prevent unauthorized change in operating condition and verify transfer switch door is locked closed.
5. To reenergize the load, remove the padlock(s) from the service disconnect control switch, and move the switch to the "Energized" position. The transfer switch will immediately return to the utility or generator supply if within normal operating limits.

4.4. TEST MODES

The transfer switch may be tested utilizing the TSC 7320 front panel buttons or remote power fail test input. A simulated utility power failure condition will be activated when the test mode is selected. The transfer switch will operate as per a normal utility power fail condition.

The transfer switch will remain on generator supply until the test mode is terminated. It will then immediately transfer back to the utility supply and then continue to operate the generator set for its cooldown period then stop.

NOTE: The transfer switch will automatically return to the utility supply (if within nominal limits) if the generator set fails while in the test mode.

4.4.1. ON LOAD TEST

To initiate an ATS On Load Test, press the test button on the TSC 7320 controller to enter test mode.

Next, press the gen start button (green), and the controller will start the generator and once it reaches the nominal voltage and frequency, the switch will be transferred to the generator and take over the load.

To stop the on-load test and return to normal, press the auto button, and the controller will start a utility return delay timer, and transfer back to the utility when the timer expires. The generator will continue to run until the cooling expires, and then it will turn off the generator.



NOTE : Pushing the red stop button will initiate a return to Utility request followed by an engine stop. If the utility is available, the ATS will transfer to utility and stop the engine ignoring any countdown timers. If the Utility is not available, the controller will turn off the generator, and generate a *Mains Fail to Close Alarm*.

4.4.2. OFF LOAD TEST

To initiate an ATS off load test, press the manual button on the TSC 7320 controller to enter manual mode.

Next, press the gen start button (green), and the controller will start the generator, but the switch will NOT transfer to generator, even if the source is healthy.

To stop the off-load test and return to normal, press the STOP button, and the controller will turn off the generator. If the Auto mode button is pushed, the controller will start a countdown timer and then turn off the generator.



5. OVER CURRENT PROTECTION

Thomson Power Systems **TS 880** series of Automatic Transfer Switches may be supplied with or without integral over current protection as described below:

5.1. STANDARD TS 880 AUTOMATIC TRANSFER SWITCH

The standard TS 880 Automatic Transfer Switch does not contain any integral over current protection and requires upstream over current protection devices for both Utility and Generator sources. The Standard TS 880 is rated for 100% continuous loading and can withstand a maximum short circuit fault current as noted in [SECTION 11](#) of this manual. The standard TS 880 Transfer Switch model without integral over current protection is identified in the product model code. Refer to [SECTION 3.4](#) of this manual for further details on model coding.

5.2. OPTIONAL TS 880 ATS WITH INTEGRAL OVER CURRENT PROTECTION

TS 880 Transfer Switches will have integral over current protection supplied on the Utility source as standard. For transfer switches rated 800A through 4000A over current protection is adjustable electronic type with long time & instantaneous trip unit elements with optional ground fault protection elements.

NOTE: Ground fault protection is supplied as standard on 1000A and 1200A transfer switches that are used on systems greater than 240V.

An upstream over current protection device is required on the generator source which feeds the TS 880 Transfer Switch if integral over current protection option is not specified on the ATS.

NOTE: For models of transfer switch with adjustable integral over current protection trip units, the over current protection must be set prior to operation. The equipment will be shipped from the factory with a long-time current setting of 100% (of the equipment rating) and maximum instantaneous/short-time current and time delay settings.

WARNING

Do Not Energize this equipment until device settings have been verified to ensure proper system protection & coordination. Failure to do so may result in equipment failure.

Refer to [SECTION 3.4](#) Product Model Code for types of integral over current protection which are supplied with the transfer switch.

6. SERVICING TRANSFER SWITCH MECHANISMS

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected.

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death.

Failure to correctly maintain an Automatic Transfer Switch may present a hazard to life and equipment. Full operational testing must be done prior to placing a transfer switch in service subsequent to any maintenance or repair. Any service work involving electrical components requires high-potential testing to ensure that required insulation levels have been maintained.

6.1. SERVICING INSULATED CASE TYPE TRANSFER MECHANISMS

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death

6.1.1. EQUIPMENT INSPECTION

To maintain mechanical integrity, ensure that:

- All linkages are correctly adjusted
- Mechanical interlocking is correct - it should not be possible to close a power switching unit without first opening the other power switching unit
- All fasteners are adequately tightened
- The operating linkages are not damaged or bent, and that all bearing points operate freely

To maintain electrical integrity, ensure that:

- All electrical connections are clean and adequately tightened. Corroded or loose power connections will cause destructive heating, and may cause premature

tripping of the power switching devices that incorporate integral over current protection units

- All insulating devices are in place and in good condition
- No moisture or other contamination is present
- Electrical conductors are adequately secured away from moving parts

To maintain operational integrity, ensure that:

- All control devices are in good condition and correctly calibrated
- All control devices are adequately secured in their plug-in fixtures

6.1.2. RECOMMENDED MAINTENANCE

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death

- Do not perform dielectric tests on the equipment with the control components in the circuit
- Check if control components are tight in sockets
- Periodically inspect all terminals (load, line and control) for tightness. Re-torque all bolts, nuts and other hardware. Clean or replace any contact surfaces which are dirty, corroded or pitted
- Transfer switches should be in a clean, dry and moderately warm location. If signs of moisture are present, dry and clean transfer switch. If there is corrosion, try to clean it off. If cleaning is unsuitable, replace the corroded parts. Should dust and/or debris gather on the transfer switch, brush, vacuum, or wipe clean. Do not blow dirt into power switching devices
- Test the transfer switch operation. While the unit is exercising, check for freedom of movement, hidden dirt, corrosion or any excessive wear on the mechanical operating parts. Ensure that the power switching device travel is correct
- Verify all program settings on the TSC 7320 Controller are as per the programming sheet supplied with the transfer switch

7. TRANSFER SWITCH MECHANISM OPERATION

7.1. GENERAL DESCRIPTION

800A-4000A transfer switches consist of two insulated case, electrically operated power switching units mounted in a vertical stack configuration. Standard transfer switches have insulated case power switching devices, which are fix-mounted. Draw-out type power switching devices are available as an option for additional service and maintenance benefits. Open Transition Type Transfer Switches are provided with power switching devices which are electrically and mechanically interlocked using a cable interlock mechanism. On Closed Transition type transfer switches, the mechanical interlock is removed. The power switching units are provided with 120VAC powered internal motor operators and open-and-close coils. Mechanically operated Open and Close pushbuttons are provided on the face of the power switching units for Manual Operation.

An Open Transition Type Transfer switch has three possible operating positions:

- a) Utility power switching device closed and generator power switching device open;
- b) Generator power switching device closed and utility power switching device open;
- c) Both utility and generator power switching devices open, but never both utility and generator power switching devices closed at the same time.

A Closed Transition Type Transfer Switch has an additional operating position:

- d) Both utility and generator power switching devices closed during Closed Transition Transfer sequence. The time duration of closed transition time sequence is dependent upon type of transfer switch configuration (i.e. Fast (momentary) time of 100 milliseconds or Soft-Load time typically between 1-10 seconds)

8. MANUAL OPERATION

The Transfer Switch can be operated manually using electrically operated push buttons located at the face of the TSC 7320 controller or mechanical operated pushbuttons located at the front of each power switching devices.

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death. Do not open equipment until ALL power sources are disconnected. This equipment must be operated only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death.



DANGER

HAZARD OF ELECTRICAL SHOCK, EXPLOSION, OR ARC FLASH

This equipment must be serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE).

Many components of this equipment operate at line voltage.

DO NOT TOUCH. Use only electrically isolated tools.

Install and close all covers before applying power to this equipment

Do not open covers to equipment until ALL power sources are disconnected

Failure to do so may cause personal injury or death

TSC 7320 PUSH BUTTON CONTROLS FOR MANUAL OPERATION


AUTO: This selects automatic operation of the transfer switch. The power switching device will automatically open/close as detailed in the sequence of operation per section 5 of this manual.

MAN: This position inhibits automatic operation and automatic engine starting. The power switching device can be manually operated via electrically interlocked “Transfer to Main” and “Transfer to Generator” pushbutton located at the face of the TSC 7320 controller

START: Start the generator at manual mode and ensure it operates at nominal voltage and frequency.

TRANSFER TO MAIN: Transfer power from generator to utility supply in manual mode.

TRANSFER TO GENERATOR: Transfer power from utility to generator supply in manual mode.

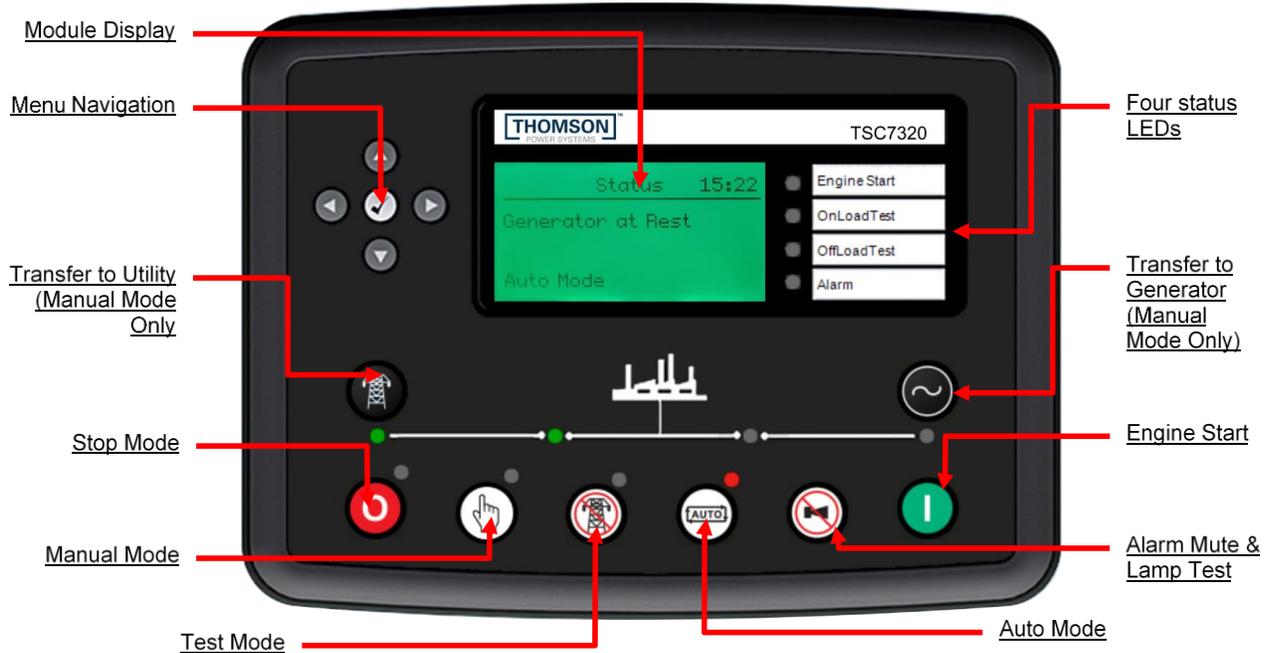

NOTE

When the Manual Mode is selected, the engine start output logic is disabled. Where generator voltage is required during manual operation the local generator controls must be set for manual operation.

MANUAL TRANSFER TO GENERATOR SUPPLY VIA TSC7320 MANUAL CONTROLS (Open Transition)

To transfer manually to generator supply, follow procedure listed below;

- a) Press “Manual Mode” pushbutton located at the face of the TSC 7320 Controller.
- b) Press “Start” pushbutton to manually start the generator set and ensure it is operating at normal voltage and frequency, with its output circuit breaker closed.
- c) Ensure the generator power switching device’s spring mechanism is fully charged as indicated by Yellow –Spring Charged flag. If the power switching device is not charged, it maybe manually charged by locating the manual charge handle mechanism on the face of the power switching device, then pulling forward and then down 1-6 times until the Yellow Spring Charged flag

is displayed. Refer to Diagrams #1 & 2 below and the power switching device's manual for further information.

NOTE:

The yellow OK Flag indicates the power switching device is charged however it may not be ready to close if the transfer switch mechanical or electrical interlocks are not satisfied.

- d) Press "Transfer to Generator" pushbutton to manually transfer the power from utility to generator supply. Verify the utility power switching device contacts are open via Green (O) Open contact status flag. Also verify generator power switching device contacts are closed via Red (I) Closed contact status flag

MANUAL TRANSFER TO UTILITY SUPPLY VIA TSC7320 MANUAL CONTROLS (Open Transition)

To transfer manually to the utility supply, follow procedure listed below;

To transfer manually to utility supply, follow procedure listed below;

- a) Press "Manual Mode" pushbutton located at the face of the TSC 7320 Controller.
- b) Ensure the utility power switching device's spring mechanism is fully charged as indicated by Yellow –Spring Charged flag. If the power switching device is not charged, it maybe manually charged by locating the manual charge handle mechanism on the face of the power switching device, then pulling forward and then down 1-6 times until the Yellow Spring Charged flag is displayed. Refer to Diagrams #1 & 2 below and the power switching device's manual for further information.

NOTE:

The yellow OK Flag indicates the power switching device is charged however it may not be ready to close if the transfer switch mechanical or electrical interlocks are not satisfied.

- c) Press "Transfer to Utility" pushbutton to manually transfer the power from generator to utility supply. Verify the generator power switching device contacts are open via Green (O) Open contact status flag. Also verify utility power switching device contacts are closed via Red (I) Closed contact status flag.

MANUAL TRANSFER TO GENERATOR SUPPLY VIA MECHANICALLY OPERATED POWER SWITCHING DEVICES PUSH BUTTONS (Open Transition)

To transfer manually to generator supply, follow procedure listed below;

- a) Disconnect the ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 & PL15) to prevent automatic operation.
- b) Manually start the generator set at its local control panel, and ensure it is operating at normal voltage and frequency, with its output circuit breaker closed.
- c) Manually open the utility power switching device using the Red (O) Mechanical Open pushbutton located on the face of the power switching device. Refer to Diagram #1 & 2 below. Verify the utility power switching device contacts are open via Green (O) Open contact status flag.
- d) Ensure the generator power switching device's spring mechanism is fully charged as indicated by Yellow –Spring Charged flag. If the power switching device is not charged, it maybe manually charged by locating the manual charge handle mechanism on the face of the power switching device, then pulling forward and then down 1-6 times until the Yellow Spring Charged flag is displayed. Refer to Diagrams #1 & 2 below and the power switching device's manual for further information.

NOTE:

The yellow OK Flag indicates the power switching device is charged however it may not be ready to close if the transfer switch mechanical or electrical interlocks are not satisfied.

- e) Manually Close the generator power switching device using the red (I) Mechanical Close pushbutton located on the face of the power switching device. Refer to Diagrams #1 & #2 below. Verify the generator power switching device contacts are closed via red (I) closed contact status flag.

NOTE

If the Transfer Switch is supplied with Closed Transition Transfer feature, the mechanical close pushbutton on the face of the power switching unit is pad locked and not available for use. Transfer to Generator and Transfer to Utility pushbutton located on the face of the TSC 7320 controller is used for manual closing. Power switching unit closure is only permitted in open transition mode (i.e. Utility power switching device must be open)

MANUAL TRANSFER TO UTILITY SUPPLY VIA MECHANICALLY OPERATED POWER SWITCHING DEVICES PUSH BUTTONS (Open Transition)

To transfer manually to the utility supply, follow procedure listed below;

- a) Disconnect the ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 & PL15) to prevent automatic operation.
- b) Manually open the generator power switching device using the Red (O) Mechanical Open pushbutton located on the face of the power switching device. Refer to Diagram #1 & 2. Verify the generator power switching device contacts are open via Green (O) Open contact status flag.
- c) Ensure the utility power switching device's spring mechanism is fully charged as indicated by Yellow - Charged OK flag. If the power switching device is not charged, it maybe manually charged by locating the manual charge handle mechanism on the face of the power switching device, then pulling forward and then down 1-6 times until the Yellow Charged OK flag is displayed. Refer to diagram #1 and the power switching device's manual for further information.

NOTE

The Yellow OK Flag indicates the power switching device is charged however it may not be ready to close if the transfer switch mechanical or electrical interlocks are not satisfied.

- d) If the utility supply is at normal voltage and frequency levels, manually Close the utility power switching device using the Black (I) Mechanical Close pushbutton located on the face of the power switching device. Refer to Diagrams #1 & #2 below. Verify the utility power switching device contacts are closed via Red (I) closed contact status flag.

NOTE


If the Transfer Switch is supplied with Closed Transition Transfer feature, the mechanical close pushbutton on the face of the power switching unit is pad locked and not available for use. Transfer to Generator and Transfer to Utility pushbutton located on the face of the TSC 7320 controller is used for manual closing. Power switching unit closure is only permitted in open transition mode (i.e. Utility power switching device must be open)

The generator set should be manually turned off at the local control panel.

DIAGRAM #1 - MASTERPACT




** Spring Charged Status Flag has 3 positions as follows:



= (Yellow) Spring is Charged; power switching device is ready for manually closing provided electrical and mechanical close interlocks are satisfied.



= (Yellow/White) Spring is Charged; power switching device is not ready to close (electrical trip Interlock is activated by automatic control signals). **Note:** This is the normal flag position for automatic operation of the Transfer Switch



= (White) Spring is Discharged; power switching device is not ready to close.

DIAGRAM #2 – EMAX2



Mechanical status indicators

The following are the possible states in which you can find the circuit-breaker:

1. Circuit-breaker open with springs discharged (see Figure 32).
2. Circuit-breaker open with springs charged (see Figure 33).
3. Circuit-breaker closed with springs discharged (see Figure 34).
4. Circuit-breaker closed with springs charged and not ready to close (see Figure 35). This state occurs when after closing (see step 4 - Manual operations for opening and closing the circuit-breaker) the springs are recharged manually or automatically by the gearmotor (if provided).
5. Circuit-breaker open with springs charged and not ready to close (see Figure 36). This state occurs in the following cases:
 - The circuit-breaker is open due to tripping of protection trip units and the Reset signal has not been reset. To close the circuit-breaker press the TU Reset pushbutton on the front of the circuit-breaker.
 - The key lock or padlock is active in the open position.
 - The undervoltage coil is de-energized.
 - The opening coil is permanently energized.
 - The closing coil is permanently energized.
 - The pushbutton for enabling the insertion/extraction crank of a withdrawable circuit-breaker is pressed.

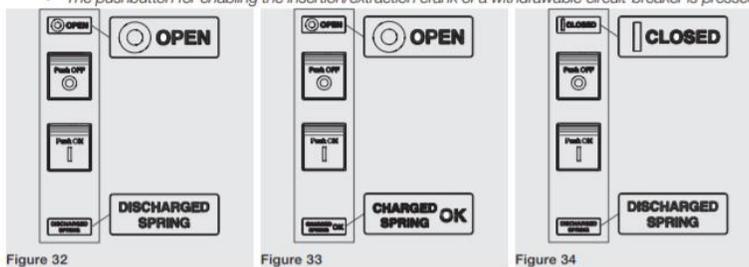


Figure 32

Figure 33

Figure 34


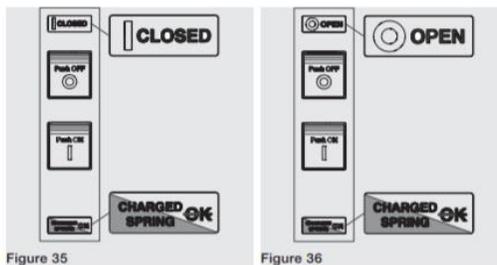



Figure 35

Figure 36

9. FRONT VIEW (TYPICAL) INSULATED CASE TYPE TRANSFER MECHANISM

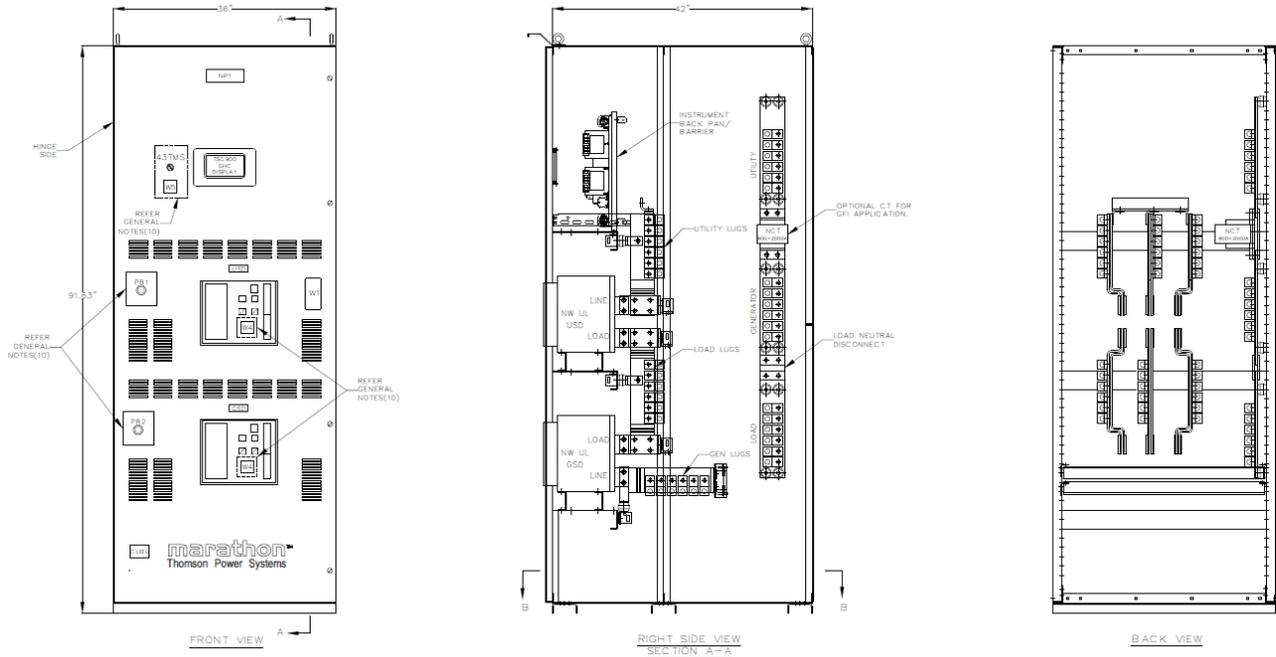

MASTERPACT - TYPICAL, 3P, 800 - 4000A

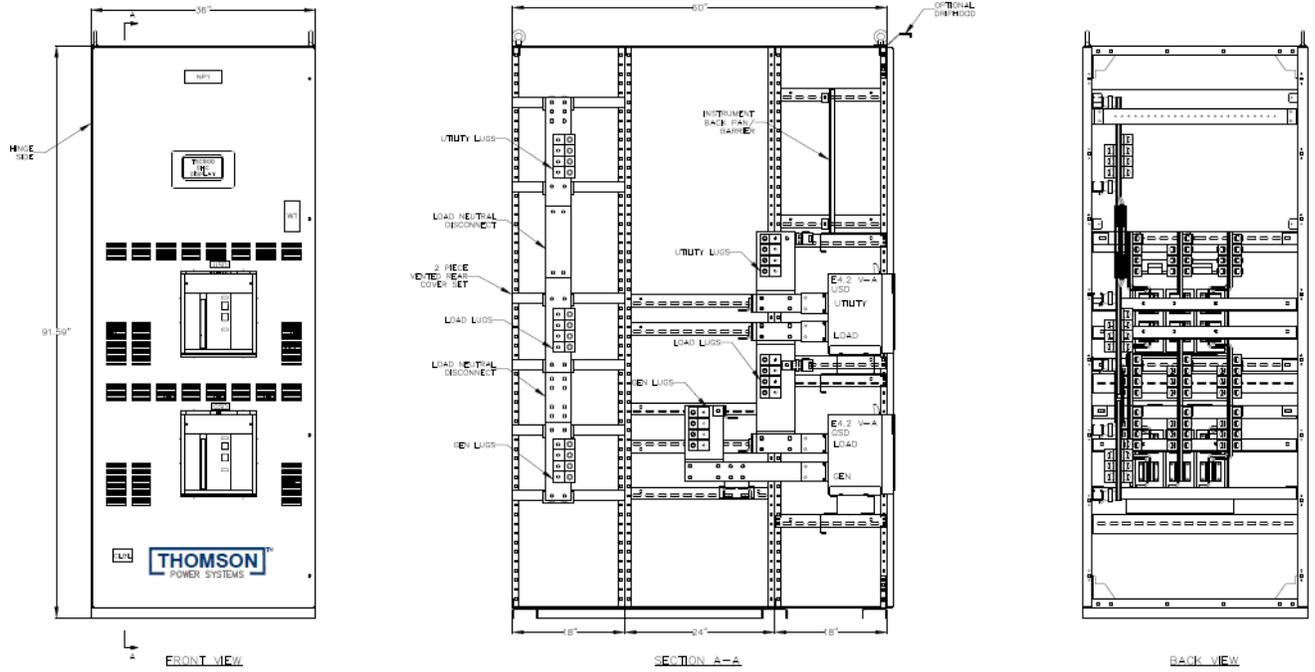

EMAX2 - TYPICAL, 3P, 1600 - 4000A

10. CABLE TERMINAL INFORMATION

BASIC MODEL	TERMINAL RATING		CONNECTION TIGHTNESS (In-lbs)	
	QTY PER PHASE	RANGE	TERMINAL MOUNTING SCREW	CABLE CLAMP
TS88xA-800/4000 ¹	As Required	#2-600mcm	--	450

1. With insulated case power switching units
2. For other model types not shown, contact Thomson Power Systems for further information.

11. REQUIREMENTS FOR UPSTREAM CIRCUIT PROTECTIVE DEVICES

11.1. WITHSTAND CURRENT RATINGS (STANDARD 3 CYCLE MODELS)

(All 3 Cycle Models Without Integral Overcurrent Protection Option)

BASIC MODEL	TYPE	MAX. VOLTAGE	RATED CURRENT (A)	WITHSTAND CURRENT RATING AMPS (RMS)		
				@240V	@480V	@600V
TS88xA-0800 ¹	MASTERPACT	600	800	100,000	100,000	85,000
TS88xA-1200 ¹	MASTERPACT	600	1200	100,000	100,000	85,000
TS88xA-1600 ¹	MASTERPACT	600	1600	100,000	100,000	85,000
TS88xA-2000 ¹	MASTERPACT	600	2000	100,000	100,000	85,000
TS88xA-2500 ¹	MASTERPACT	600	2500	100,000	100,000	85,000
TS88xA-3000 ¹	MASTERPACT	600	3000	100,000	100,000	85,000
TS88xA-4000 ¹	MASTERPACT	600	4000	100,000	100,000	85,000
TS88xA-1600 ¹	EMAX2	600	1600	85,000	85,000	85,000
TS88xA-2000 ¹	EMAX2	600	2000	85,000	85,000	85,000
TS88xA-2500 ¹	EMAX2	600	2500	100,000	100,000	100,000
TS88xA-3200 ¹	EMAX2	600	3200	100,000	100,000	100,000
TS88xA-4000 ¹	EMAX2	600	4000	100,000	100,000	100,000

1. With insulated case power switching units
2. For other ratings, contact Thomson Power Systems for further information

11.2. INTERRUPTING CAPACITY CURRENT RATINGS (STANDARD 3 CYCLE MODELS)

(All 3 Cycle Models With Integral Overcurrent Protection Option)

BASIC MODEL	TYPE	MAX. VOLTAGE	RATED CURRENT (A)	INTERRUPTING CAPACITY CURRENT RATING AMPS (RMS) ₂		
				No Upstream Overcurrent Protection Required		
				@240V	@480V	@600V
TS88xA-0800 ¹	MASTERPACT	600	800	100,000	100,000	85,000
TS88xA-1200 ¹	MASTERPACT	600	1200	100,000	100,000	85,000
TS88xA-1600 ¹	MASTERPACT	600	1600	100,000	100,000	85,000
TS88xA-2000 ¹	MASTERPACT	600	2000	100,000	100,000	85,000
TS88xA-2500 ¹	MASTERPACT	600	2500	100,000	100,000	85,000
TS88xA-3000 ¹	MASTERPACT	600	3000	100,000	100,000	85,000
TS88xA-4000 ¹	MASTERPACT	600	4000	100,000	100,000	85,000
TS88xA-1600 ¹	EMAX2	600	1600	100,000	100,000	85,000
TS88xA-2000 ¹	EMAX2	600	2000	100,000	100,000	85,000
TS88xA-2500 ¹	EMAX2	600	2500	100,000	100,000	100,000
TS88xA-3200 ¹	EMAX2	600	3200	100,000	100,000	100,000
TS88xA-4000 ¹	EMAX2	600	4000	100,000	100,000	100,000

1. With insulated case power switching units
2. With insulated case switching devices equipped with integral Overcurrent protection. Typically supplied on service entrance Automatic Transfer Switches.
3. For other ratings, contact Thomson Power Systems for further information

11.3. WITHSTAND CURRENT RATINGS (30 CYCLE MODELS)

(All 30 Cycle Models Without Integral Overcurrent Protection Option)

BASIC MODEL	TYPE	MAX. VOLTAGE	RATED CURRENT (A)	3 CYCLE / 30 CYCLE WITHSTAND CURRENT RATING AMPS (RMS)		
				@240V	@480V	@600V
TS88xA-0800 ¹	MASTERPACT	600	800	65,000	65,000	65,000
TS88xA-1200 ¹	MASTERPACT	600	1200	65,000	65,000	65,000
TS88xA-1600 ¹	MASTERPACT	600	1600	65,000	65,000	65,000
TS88xA-2000 ¹	MASTERPACT	600	2000	65,000	65,000	65,000
TS88xA-2500 ¹	MASTERPACT	600	2500	65,000	65,000	65,000
TS88xA-3200 ¹	MASTERPACT	600	3200	65,000	65,000	65,000
TS88xA-4000 ¹	MASTERPACT	600	4000	65,000	65,000	65,000
TS88xA-1600 ¹	EMAX2	600	1600	85,000	85,000	85,000
TS88xA-2000 ¹	EMAX2	600	2000	85,000	85,000	85,000
TS88xA-2500 ¹	EMAX2	600	2500	100,000	100,000	100,000
TS88xA-3200 ¹	EMAX2	600	3200	100,000	100,000	100,000
TS88xA-4000 ¹	EMAX2	600	4000	100,000	100,000	100,000

1. With insulated case power switching units
2. For other ratings, contact Thomson Power Systems for further information

11.4. INTERRUPTING CAPACITY CURRENT RATINGS (30 CYCLE MODELS)

(All 30 Cycle Models With Integral Overcurrent Protection Option)

BASIC MODEL	TYPE	MAX. VOLTAGE	RATED CURRENT (A)	INTERRUPTING CAPACITY CURRENT RATING AMPS (RMS) ₂			
				No Upstream Overcurrent Protection Required			
				3 CYCLE RATING			30 CYCLE RATING
				@240V	@480V	@600V	Up To 600VAC
TS88xA-0800 ¹	MASTERPACT	600	800	85,000	85,000	85,000	65,000
TS88xA-1200 ¹	MASTERPACT	600	1200	85,000	85,000	85,000	65,000
TS88xA-1600 ¹	MASTERPACT	600	1600	85,000	85,000	85,000	65,000
TS88xA-2000 ¹	MASTERPACT	600	2000	85,000	85,000	85,000	65,000
TS88xA-2500 ¹	MASTERPACT	600	2500	85,000	85,000	85,000	65,000
TS88xA-3200 ¹	MASTERPACT	600	3200	85,000	85,000	85,000	65,000
TS88xA-4000 ¹	MASTERPACT	600	4000	85,000	85,000	85,000	65,000
TS88xA-1600 ¹	EMAX2	600	1600	100,000	100,000	85,000	85,000
TS88xA-2000 ¹	EMAX2	600	2000	100,000	100,000	85,000	85,000
TS88xA-2500 ¹	EMAX2	600	2500	100,000	100,000	100,000	100,000
TS88xA-3200 ¹	EMAX2	600	3200	100,000	100,000	100,000	100,000
TS88xA-4000 ¹	EMAX2	600	4000	100,000	100,000	100,000	100,000

1. With insulated case power switching units
2. With insulated case switching devices equipped with integral Overcurrent protection. Typically supplied on service entrance automatic transfer switches.
3. For other ratings, contact Thomson Power Systems for further information

12. GROUND FAULT SITE TEST REQUIREMENTS

Per NEC and UL 1008, a ground fault protected system shall be performance tested when first installed on site. A written record of this shall be made and be available to the authority having jurisdiction. A form is provided at the back of this manual for this purpose – see **SECTION 20**.

Confirm and record actual trip setpoints in the form provided which is to be made available on request by the inspection authority.

12.1. PERFORMANCE TEST

Qualified Field Service technicians require a calibrated current injection test apparatus and must be knowledgeable in power switching unit testing to provide primary neutral CT injection up to or greater than the trip setpoint as selected by the responsible party. As indicated in the NEC, the maximum setting of the ground fault protection shall be 1200 Amps, and the maximum time delay shall be one second for ground faults equal to or greater than 3000 Amps.

The inspection authority should be contacted to confirm actual test requirements as these may vary by region or local code requirements.

The interconnected system shall be evaluated to ensure compliance with the appropriate schematic drawings. The proper location of sensors and power cabling shall be determined. The grounding points of the system shall be verified to determine that ground paths do not exist that would bypass the sensors. The use of high-voltage testers and resistance bridges may be required. A simulated fault current is to be generated by a coil around the sensors. The reaction of the circuit-interrupting device is to be observed for correct response. The results of the test are to be recorded on the test form provided.

TROUBLESHOOTING

DANGER

Arc Flash and Shock Hazard. Will cause severe injury or death.

Do not open equipment until ALL power sources are disconnected

This equipment must be installed and serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Failure to do so may cause personal injury or death

MALFUNCTIONS	PROBABLE CAUSES	CORRECTIVE ACTIONS
Will not re-transfer to utility source upon restoration (OPEN TRANSITION)	Utility Return Time (mains transient) delay period in TSC 7320 has not yet expired.	Verify TSC 7320 time delay setting
	A Load Test mode has been activated locally or remotely	Check TSC 7320 load test LED status indicators
	An Exercise Test mode has been activated by the TSC 7320 scheduler	Check TSC 7320 status screen for Exercise Test is active
	Utility supply is not operating at correct voltage or frequency levels.	Verify correct nominal levels the utility source should be operating at and compare to TSC 7320 settings for under/over voltage, voltage phase balance and under/over frequency
	TSC 7320 has incorrect utility voltage or frequency settings for the ATS.	Re-Program TSC 7320 with correct settings as required for voltage or frequency.
	Utility Phase Rotation is not matched with Generator supply (first time transfer).	Check Generator & Utility Voltage Phase rotation matches on TSC 7320 Utility & Generator Voltage Pages. If power cabling has non-matching phase rotation, reverse power conductors on one phase on one of the supplies
	TSC 7320 utility voltage sensing connection plug (38,39,40,41) is unplugged	Verify all TSC 7320 connectors are fully inserted
	ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 or PL15) are unplugged	Verify both PL12 & PL15 connectors are fully inserted
	TSC 7320 has "Transfer Fail" alarm activated.	Determine cause of alarm and rectify before resting the alarm on TSC 7320
	Defective Utility power switching unit close coil	Verify Utility power switching device close coil is fully functional.
	Defective generator power switching unit trip coil (open transition)	The generator power switching unit must be open before the utility power switching device is permitted to close (open transition).
	Faulty Power Switching Device	Refer to Power Switching Device Troubleshooting Section
	Transfer Mode selector is not in "Auto" position	Turn Transfer Mode selector to "Auto" position
	Mechanical Interlock between generator and Utility Power switching units is defective (open transition)	Verify mechanical interlock is operating correctly (refer to power switch device instruction manual for further detail)
A loose control wire connection	Check all wiring connections in the ATS	

<p>Will not re-transfer to utility source upon restoration (OPEN TRANSITION (cont'd))</p>	<p>On Service Entrance Rated ATS, Service Disconnect switch is in the "De-Energized" or "Transfer to Neutral" positions.</p>	<p>Switch to the Energized position</p>
	<p>On Service Entrance Rated ATS, Utility Voltage Disconnect switch inside ATS is switched to "Off" position.</p>	<p>Switch Utility Voltage Disconnect switch to the "On" position</p>
	<p>Defective TSC 7320 controller</p>	<p>Verify TSC 7320 has 24VDC control power applied to the battery power input (1,2), then press and hold the lamp test button, and ensure all 12 LED lights on the front panel light up</p> <p>If defective, return to Thomson Power systems using RMA process</p>
	<p>Faulty Power Switching device auxiliary contact</p>	<p>Verify Generator & Utility auxiliary contacts are operating correctly</p>
<p>Closed Transition – Fail to Transfer</p>	<p>Only one source of supply is within normal operating voltage and frequency limits</p>	<p>Both utility and generator sources must be at nominal operating voltage and frequency limits. Verify correct nominal levels the utility and generator source should be operating at and compare to TSC 7320 settings for under/over voltage, voltage phase balance and under/over frequency.</p>
	<p>Frequency difference between utility and generator is too low which prevents Utility and generator sources to drift into synchronism within the maximum sync time.</p>	<p>Adjust generator frequency to be +-0.2HZ different that the utility source to allow enough slip frequency to come into synchronism</p>
	<p>Frequency difference between utility and generator is too high which prevents Utility and generator sources to attain synchronism long enough to satisfy in-phase monitor dwell time.</p>	<p>Adjust generator frequency to be +-0.2HZ different that the utility source to allow enough slip frequency to come into synchronism for in-phase monitor.</p>
	<p>TSC 7320 In-phase monitor settings are incorrect for application.</p>	<p>Verify TSC 7320 in-phase monitor setting have correct phase, voltage and dwell settings for the application</p>
	<p>Closed Transition Transfer mode is not enabled on TSC 7320</p>	<p>Verify Closed Transition transfer mode is enabled via TSC 7320 display or door mounted control switch (if ted)</p>
<p>Will not transfer to generator source upon failure of utility source</p>	<p>Warmup time delay function has not timed out yet</p>	<p>Verify TSC 7320 timer setting</p>
	<p>Generator set output circuit breaker which feeds ATS is open</p>	<p>Close generator set output circuit breaker</p>

<p>Will not transfer to generator source upon failure of utility source (cont'd)</p>	Generator supply is not operating at correct voltage or frequency levels.	Verify correct nominal levels the generator should be operating at and compare to TSC 7320 Settings for under/over voltage, voltage phase balance and under/over frequency
	TSC 7320 has incorrect generator voltage or frequency settings for the ATS.	Re-Program TSC 7320 with correct settings as required for voltage or frequency.
	Generator Phase Rotation may not match Utility supply (First Time Transfer).	Check Generator & Utility Voltage Phase rotation matches on TSC 7320 Utility & Generator Voltage Pages. If power cabling has non-matching phase rotation, reverse power conductors on one phase on one of the supplies
	TSC 7320 Generator voltage sensing connection plug (34,35,36,37) is unplugged	Verify all TSC 7320 connectors are fully inserted
	ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 or PL15) are unplugged	Verify both PL12 & PL15 connectors are fully inserted
	TSC 7320 has "Transfer Fail" alarm activated.	Determine cause of alarm and rectify before resetting the alarm at TSC 7320
	Defective Generator power switching unit close coil	Verify Generator power switching device close coil is fully functional.
	Defective Utility power switching unit trip coil (open transition)	The Utility power switching unit must be open before the generator power switching device is permitted to close (open transition).
	Faulty Power Switching Device	Refer to Power Switching Device Troubleshooting Section
	Transfer Mode selector is not in "Auto" position	Turn Transfer Mode selector to "Auto" position
	A loose control wire connection	Check all wiring connections in the ATS
	Defective TSC 7320 controller	Verify TSC 7320 has 24VDC control power applied to the battery power input (1,2), then press and hold the lamp test button, and ensure all 12 LED lights on the front panel light up If defective, return to Thomson Power systems using RMA process
	Faulty Power Switching device auxiliary contact	Verify Generator & Utility auxiliary contacts are operating correctly
A Load Test mode has been activated locally or remotely	Check TSC 7320 load test LED status indicators	

<p>Transfer to generator source without a power failure in the utility source</p>	<p>An Exercise Test mode has been activated by the TSC 7320 scheduler</p>	<p>Check TSC 7320 status screen for Exercise Test is active</p>
	<p>Utility supply is not operating at correct voltage or frequency levels.</p>	<p>Verify correct nominal levels the utility source should be operating at and compare to TSC 7320 settings for under/over voltage, voltage phase balance and under/over frequency</p>
	<p>TSC 7320 has incorrect utility voltage or frequency settings for the ATS.</p>	<p>Re-Program TSC 7320 with correct settings as required for voltage or frequency.</p>
	<p>Utility power switching device has tripped open due to an over current condition and TSC 7320 "Mains Breaker Tripped" alarm is displayed.</p>	<p>Determine cause of alarm and rectify before TSC 7320 is reset.</p>
	<p>A loose control wire connection</p>	<p>Check all wiring connections in the ATS</p>
	<p>Defective TSC 7320 controller</p>	<p>Verify TSC 7320 has 24VDC control power applied to the battery power input (1,2), then press and hold the lamp test button, and ensure all 12 LED lights on the front panel light up</p> <p>If defective, return to Thomson Power systems using RMA process</p>
<p>Generator does not start or stop when it should</p>	<p>Remote engine control panel is not set to automatic mode</p>	<p>Verify remote engine control panel is set for automatic operation</p>
	<p>Engine start contact is wired incorrectly from ATS to engine control panel</p>	<p>Verify engine start contact is wired correctly from ATS to engine control panel</p>
	<p>TSC 7320 Engine start contact connection plug (30,31) is unplugged</p>	<p>Verify all TSC 7320 connectors are fully inserted</p>
	<p>Defective TSC 7320 controller</p>	<p>Verify TSC 7320 has 24VDC control power applied to the battery power input (1,2), then press and hold the lamp test button, and ensure all 12 LED lights on the front panel light up</p> <p>If defective, return to Thomson Power systems using RMA process</p>
	<p>Engine Start and/or Cooldown timers may be duplicated in both ATS control and Engine control Panel</p>	<p>Disable timers in Engine control panel.</p>
<p>No time delay when there should be</p>	<p>Incorrect TSC 7320 time delay setting</p>	<p>Verify TSC 7320 timer setting</p>

<p>TS 7320 Display is not showing any system information</p>	<p>Defective TS 7320 controller</p>	<p>Verify TSC 7320 has 24VDC control power applied to the battery power input (1,2), then press and hold the lamp test button, and ensure all 12 LED lights on the front panel light up</p> <p>If defective, return to Thomson Power systems using RMA process</p>
	<p>TSC 7320 controller is not powered from 24Vdc aux supply</p>	<p>The TSC 7320 controller needs 24Vdc aux power all the time. Verify Low power buffer module provides proper 24Vdc supply to TSC 7320 controller.</p>

NOTE

There are no user serviceable components located on the TSC 7320 printed circuit board. If the TSC 7320 Controller is deemed to be defective, they must be returned to the Thomson Power Systems Factory for repair or replacement. Please refer to Product Return Policy section of this manual further information on product return procedures required.


13. POWER SWITCHING DEVICE TROUBLESHOOTING

MALFUNCTIONS	PROBABLE CAUSES	CORRECTIVE ACTIONS
<p>The power switching device cannot be opened locally</p>	<ul style="list-style-type: none"> - Open pushbutton locked - Faulty mechanism or main circuits bonded 	<ul style="list-style-type: none"> - Remove the locking - Contact Thomson Power Systems Service Department
<p>The power switching device cannot be manually closed</p>	<ul style="list-style-type: none"> - Power switching device closing on short-circuit. - Fault trip indicator-on power switching device button not reset. (Service Entrance type ATS) - Power switching device not fully connected. (draw-out type only) - Anti-pumping function. - Power switching device not charged. - Closing coil is continuously supplied. - Power switching device locked in "open" position. - Power switching device interlocked. 	<ul style="list-style-type: none"> - Clear the fault. Check power switching device condition before putting back into operation. - Reset fault trip indicator-button. - Connect power switching device fully. - Move transfer mode switch to the manual position, then back to the auto position to cycle the control signal. - Check the geared motor power supply is greater than 85% nominal voltage. Check the power supply circuit. Attempt a manual recharging. Replace the geared motor if necessary. (Contact Thomson Power Systems Service Department) - Move transfer mode switch to the manual position, then back to the auto position to cycle the control signal. - Remove the locking. - Check whether this refusal to close is not normal.
<p>The power switching device does not recharge electrically</p>	<ul style="list-style-type: none"> - Charge motor supply voltage too low (less than 85% nominal voltage). 	<ul style="list-style-type: none"> - Apply a voltage greater than 85% nominal voltage. Check the charge motor electrical circuit. Attempt to recharge manually. If problem: mechanism is faulty. Contact Thomson Power Systems Service Department. If okay: motor faulty. Replace it.

MALFUNCTIONS	PROBABLE CAUSES	CORRECTIVE ACTIONS
<p>It is impossible to insert the racking handle to connect or to disconnect the power switching device</p>	<ul style="list-style-type: none"> - There is a padlock or a key-lock for connected or disconnected position. There is a racking interlock. - The extraction rails or the power switching device is not completely pushed in. 	<ul style="list-style-type: none"> - Remove disabling. - Push the rails or the power switching device completely in.
<p>It is impossible to extract the right side rail (on chassis alone) or the power switching device</p>	<ul style="list-style-type: none"> - The racking handle is remained inserted. - The power switching device is not completely disconnected. - There is a padlock or a key-lock for connected or disconnected position. There is a racking interlock. 	<ul style="list-style-type: none"> - Remove the racking handle and put it in its storage. - Disconnect the power switching device - Remove disabling.
<p>It is impossible to extract the power switching device whenever it is charged</p>	<ul style="list-style-type: none"> - There is an extraction locking when power switching device is charged. 	<ul style="list-style-type: none"> - Discharge the power switching device (open, close then open again the power switching device).
<p>It is impossible to rack in the power switching device</p>	<ul style="list-style-type: none"> - The chassis does not correspond with the power switching device. - The plastic ties which hold clusters during transport are not removed. - The clusters positions are not correct. - There is a safety shutters locking. 	<ul style="list-style-type: none"> - Fit fouling-plate on your chassis and power switching device to avoid new mistakes. - Remove the plastic ties. - Put them in order again. - Remove this locking.


14. POWER SWITCHING DEVICE DETAILS

Power Switching Device

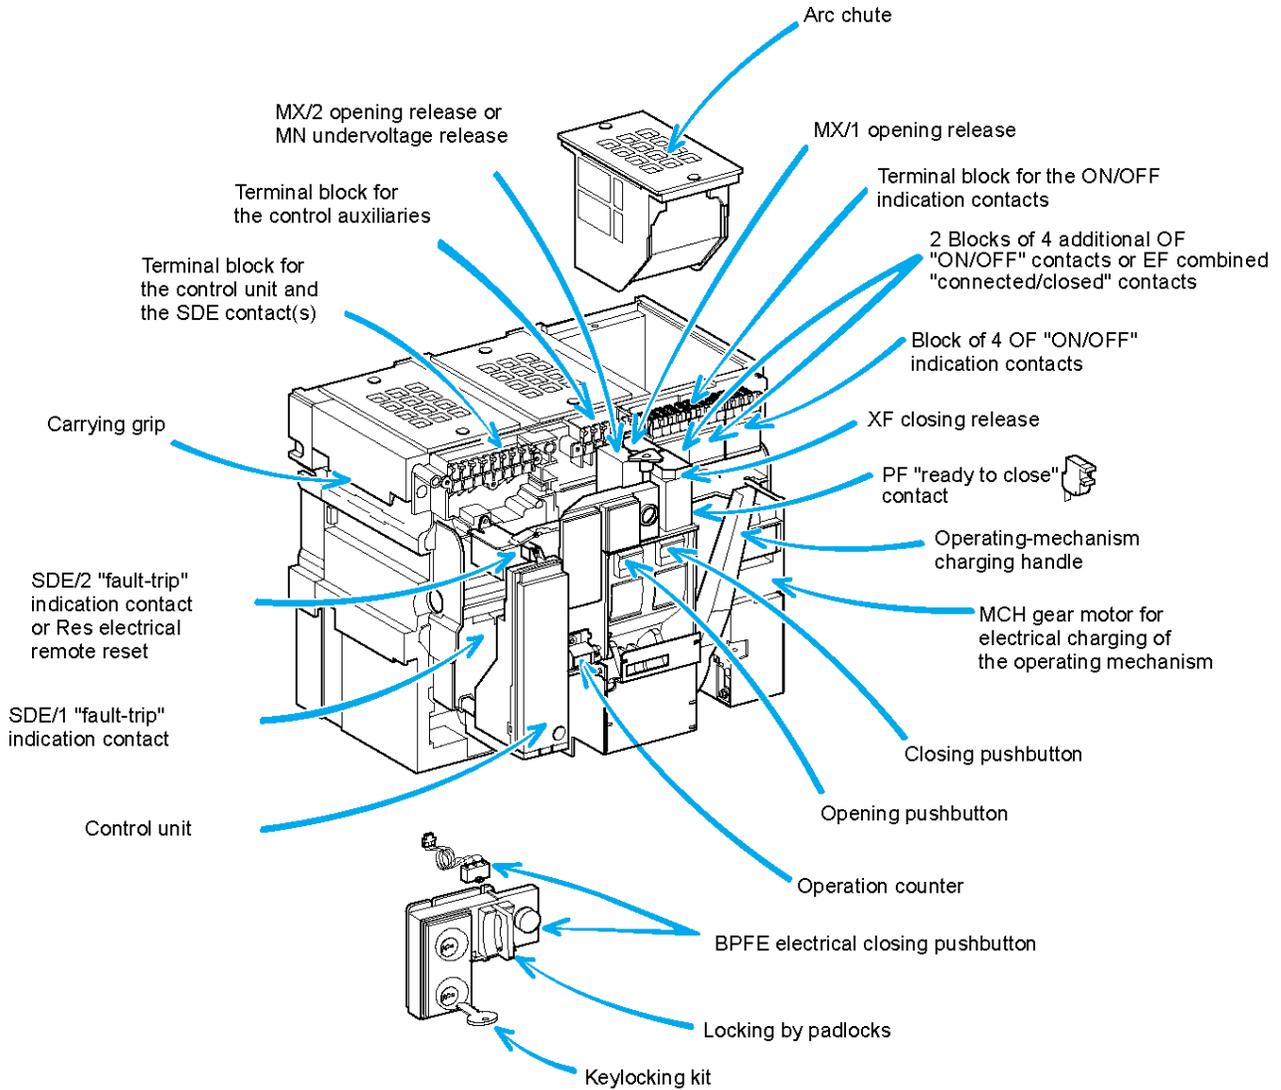

MASTERPACT – BREAKER DIAGRAM

Chassis

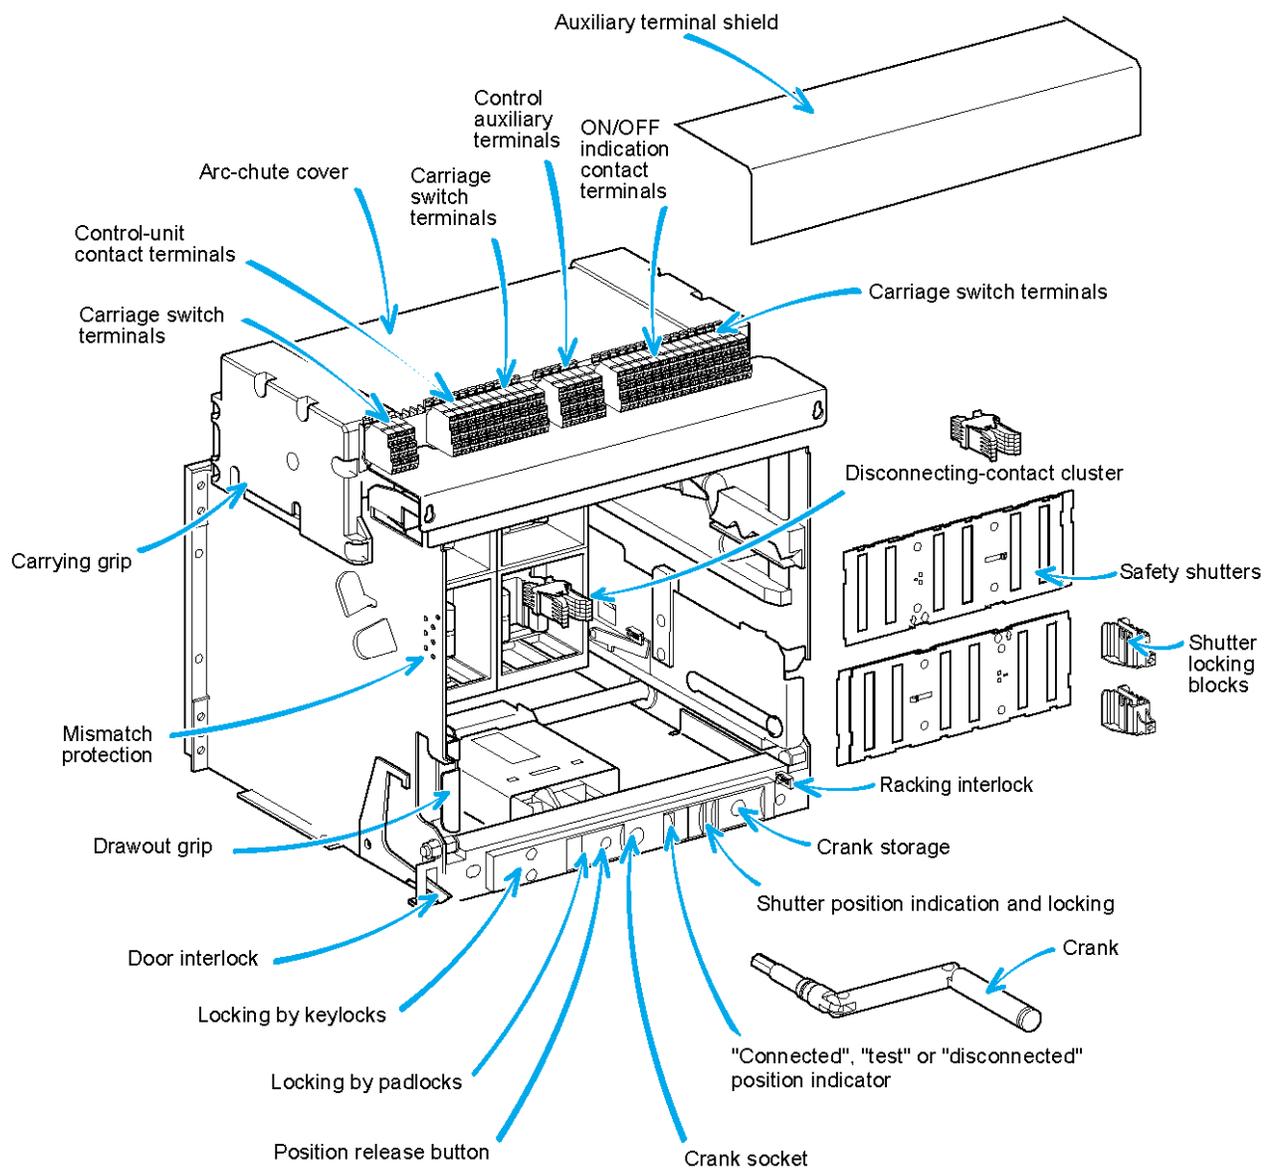

MASTERPACT – DRAWOUT CHASIS DIAGRAM

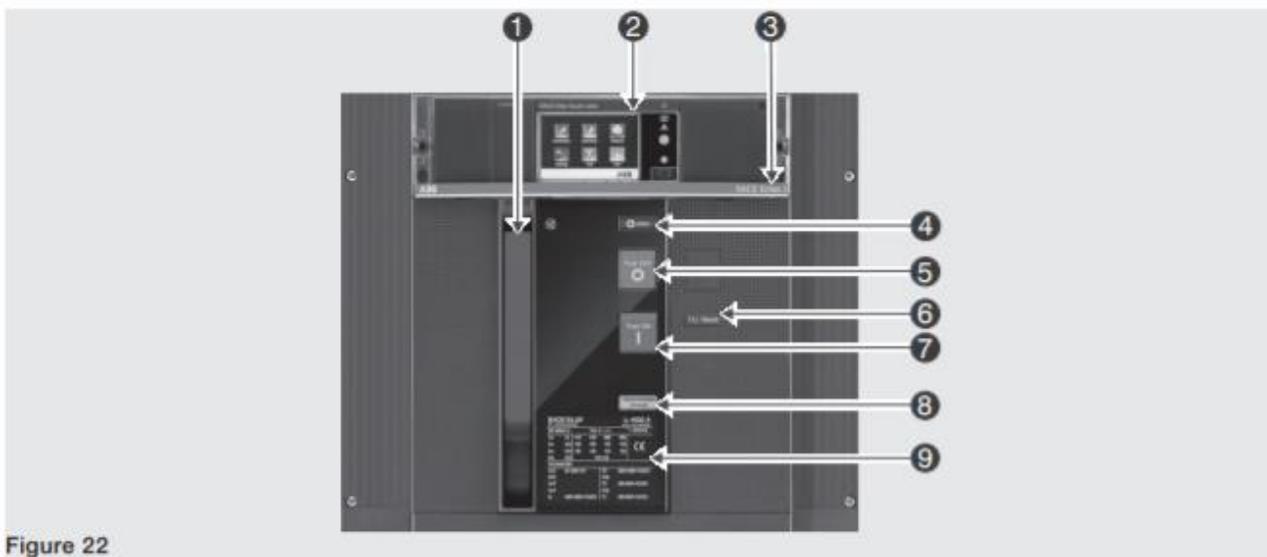


Figure 22

Pos.	Description
1	Lever for manually charging the closing springs
2	Ekip protection trip unit
3	Name of the circuit-breaker
4	CB open (O) / closed (I) indicator
5	Opening pushbutton
6	Mechanical signalling of tripped TU
7	Closing pushbutton
8	Springs charged-discharged signalling device
9	Electrical data plate

EMAX2 – BREAKER DIAGRAM

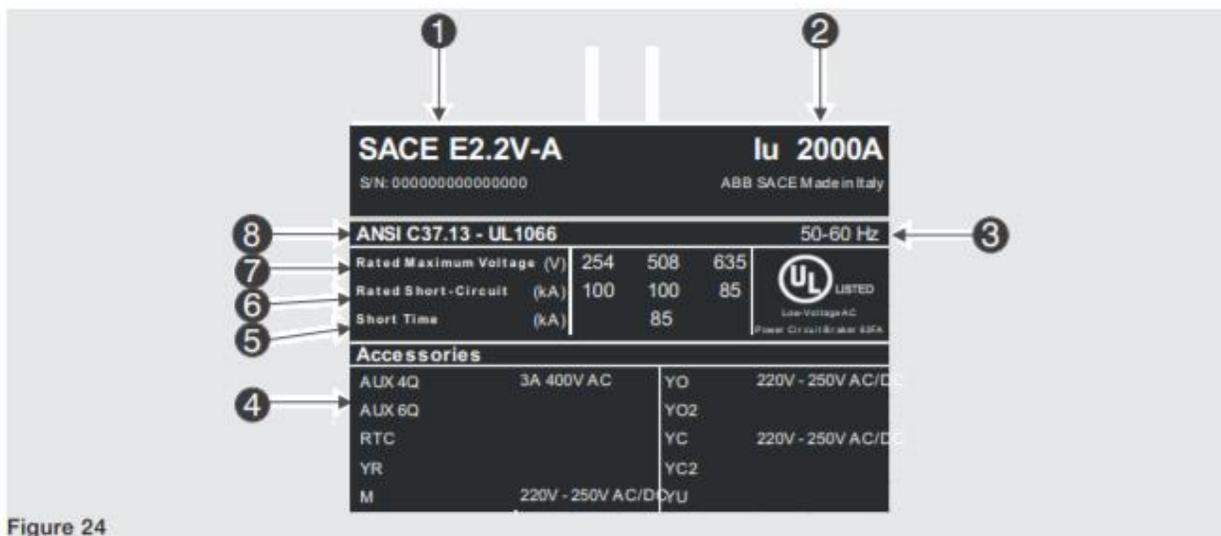


Figure 24

Pos.	Description
1	Type of circuit-breaker
2	Rated current
3	Rated operating frequency
4	Rated voltage of accessories
5	Rated short-circuit breaking capacity
6	Rated service voltage
7	Standards
8	Circuit-breaker serial number


EMAX2 – RATING PLATE DETAILS

15. POWER SWITCHING DEVICE ELECTRICAL DIAGRAMS

MASTERPACT

Fixed and Drawout Devices

The diagram is shown with circuits de-energised, all devices open, connected and charged and relays in normal position.

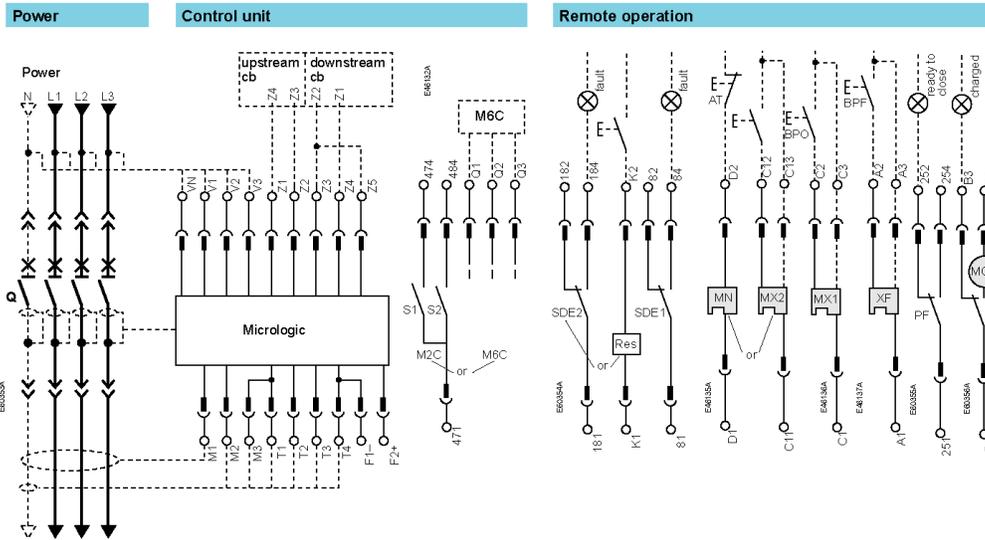

Control unit		Com		UC1		UC2		UC3		UC4		M2C / M6C	
○	○	○	○	○	○	○	○	○	○	○	○	○	○
E5	E6	Z5	M1	M2	M3	F2+	V3	484	/	Q3			
○	○	○	○	○	○	○	○	○	○	○	○	○	○
E3	E4	Z3	Z4	T3	T4	VN	V2	474	/	Q2			
○	○	○	○	○	○	○	○	○	○	○	○	○	○
E1	E2	Z1	Z2	T1	T2	F1-	V1	471	/	Q1			

Remote operation		SDE2 / Res		SDE1		MN / MX2		MX1		XF		PF		MCH	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
184	/	K2		84		D2	/	C12		C2		A2		254	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
182				82				C3		A3		252		254	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
181	/	K1		81		D1	/	C11		C1		A1		251	


A	P	H	Control unit	Remote operation
■	■	■	Com: E1-E6 communication	SDE2: Fault-trip indication contact or Res: Remote reset
■	■	■	UC1: Z1-Z5 zone selective interlocking: Z1 = ZSI OUT SOURCE Z2 = ZSI OUT; Z3 = ZSI IN SOURCE Z4 = ZSI IN ST (short time) Z5 = ZSI IN GF (earth fault) M1 = Vigi module input (Micrologic 7)	SDE1: Fault-trip indication contact (supplied as standard)
■	■	■	UC2: T1, T2, T3, T4 = external neutral; M2, M3 = Vigi module input (Micrologic 7)	MN: Undervoltage release or MX2: Shunt release
■	■	■	UC3: F2+, F1- external 24 V DC power supply VN external voltage connector	MX1: Shunt release (standard or communicating)
■	■	■	UC4: V1, V2, V3 optional external voltage protector	XF: Closing release (standard or communicating)
■	■	■	M2C: 2 programmable contacts (internal relay); ext. 24 V DC power supply required or M6C: 6 programmable contacts (external relay); 24 V DC power supply required	PF: "Ready to close" contact MCH: Gear motor.

Note:
When communicating MX or XF releases are used, the third wire (C3, A3) must be connected even if the communications module is not installed.

A : Digital ammeter
P : A + power meter + programmable protection
H : P + harmonics

Identifying the electrical auxiliaries

Electrical diagrams

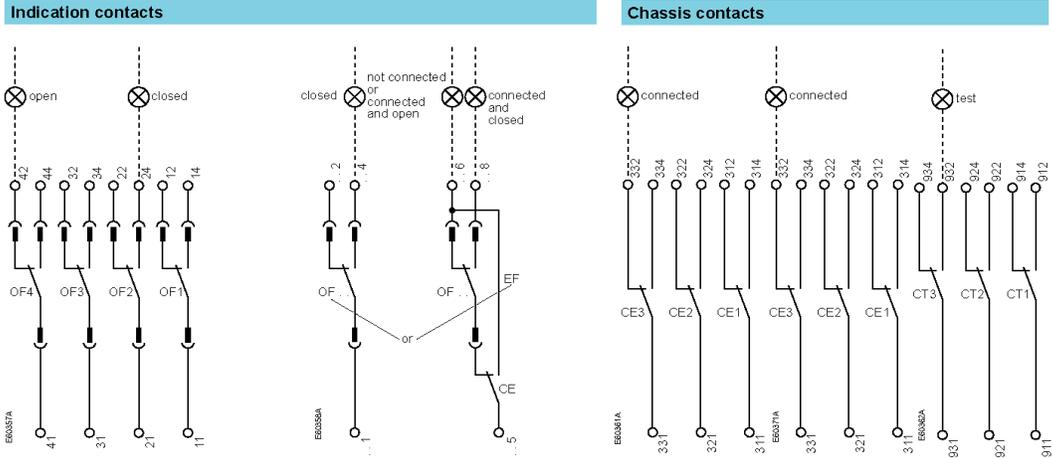

Indication contacts				Indication contacts							
OF4	OF3	OF2	OF1	OF24	OF23	OF22	OF21	OF14	OF13	OF12	OF11
⊖ 44	⊖ 34	⊖ 24	⊖ 14	⊖ 244	⊖ 234	⊖ 224	⊖ 214	⊖ 144	⊖ 134	⊖ 124	⊖ 114
⊖ 42	⊖ 32	⊖ 22	⊖ 12	⊖ 242	⊖ 232	⊖ 222	⊖ 212	⊖ 142	⊖ 132	⊖ 122	⊖ 112
⊖ 41	⊖ 31	⊖ 21	⊖ 11	⊖ 241	⊖ 231	⊖ 221	⊖ 211	⊖ 141	⊖ 131	⊖ 121	⊖ 111
				or	or	or	or	or	or	or	or
EF24	EF23	EF22	EF21	EF14	EF13	EF12	EF11				
⊖ 248	⊖ 238	⊖ 228	⊖ 218	⊖ 148	⊖ 138	⊖ 128	⊖ 118				
⊖ 246	⊖ 236	⊖ 226	⊖ 216	⊖ 146	⊖ 136	⊖ 126	⊖ 116				
⊖ 245	⊖ 235	⊖ 225	⊖ 215	⊖ 145	⊖ 135	⊖ 125	⊖ 115				

Chassis contacts											
CD3	CD2	CD1	CE3	CE2	CE1	CT3	CT2	CT1			
⊖ 834	⊖ 824	⊖ 814	⊖ 334	⊖ 324	⊖ 314	⊖ 934	⊖ 924	⊖ 914			
⊖ 832	⊖ 822	⊖ 812	⊖ 332	⊖ 322	⊖ 312	⊖ 932	⊖ 922	⊖ 912			
⊖ 831	⊖ 821	⊖ 811	⊖ 331	⊖ 321	⊖ 311	⊖ 931	⊖ 921	⊖ 911			
or						or					
CE6	CE5	CE4				CE9	CE8	CE7			
⊖ 364	⊖ 354	⊖ 344				⊖ 394	⊖ 384	⊖ 374			
⊖ 362	⊖ 352	⊖ 342				⊖ 392	⊖ 382	⊖ 372			
⊖ 361	⊖ 351	⊖ 341				⊖ 391	⊖ 381	⊖ 371			

Indication contacts			
OF4: ON/OFF	OF 24 or	ON/OFF indication contacts	
OF3 indication	EF 24	Combined "connected/closed" indication contacts	
OF2 contacts	OF 23 or		
OF1	EF 23		
	OF 22 or		
	EF 22		
	OF 21 or		
	EF 21		
	OF 14 or		
	EF 14		
	OF 13 or		
	EF 13		
	OF 12 or		
	EF 12		
	OF 11 or		
	EF 11		

Chassis contacts			
CD3: Disconnected	CE3: Connected	CT3: Test-position	
CD2 -position	CE2 -position	CT2 contacts	
CD1 contacts	CE1 contacts	CT1	
or		or	
CE6: Connected	CE9: Connected		
CE5 position	CE8 position		
CE4 contacts	CE7 contacts		
	or		
	CD6: Disconnected		
	CD5 position		
	CD4 contacts		


Key:

- Drawout device only
- XXX SDE1, OF1, OF2, OF3, OF4 supplied as standard
- Intercorrelated connections (only one wire per connection point)

Operation


The ON/OFF indication contacts signal the status of the device main contacts.

Power Switching Device

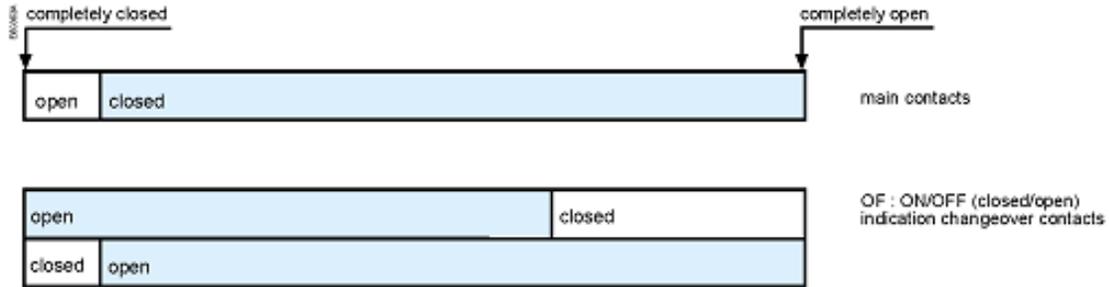

The carriage switches indicate the "connected", "test" and "disconnected" positions.

Chassis

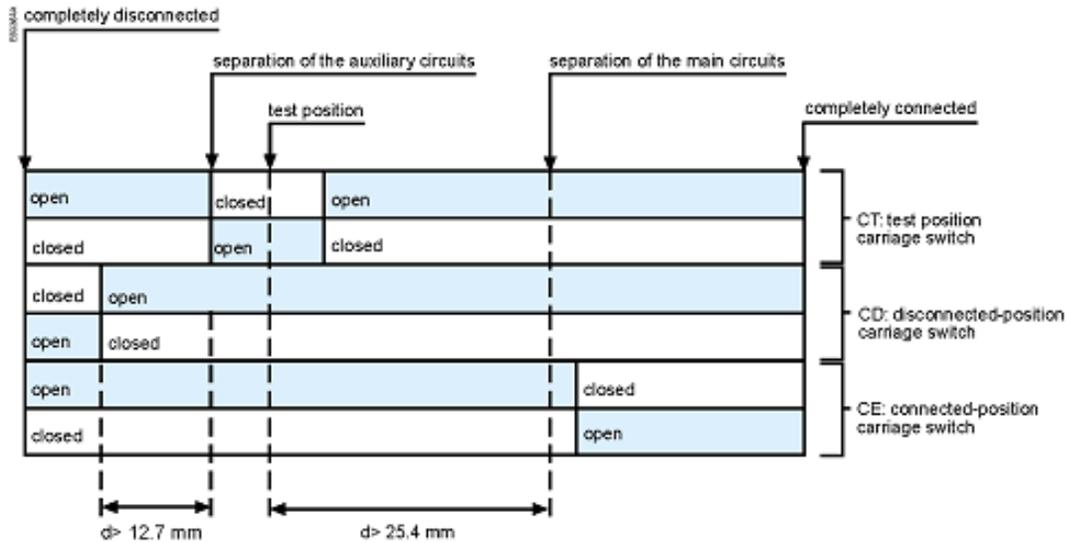


EMAX2

Electrical accessories

Q5-Q19	EXP Signaling 4C	S51	S33	M	YR	V1	V2	V3	V4	W3	W4	IC1	IC2	IC3	IC4	IC5	IC6	IC7	IC8	IC9	IC10	IC11	IC12	IC13	IC14	IC15	IC16	IC17	IC18	IC19	IC20	IC21	IC22	IC23	IC24	IC25	IC26	IC27	IC28	IC29	IC30	IC31	IC32	IC33	IC34	IC35	IC36	IC37	IC38	IC39	IC40	IC41	IC42	IC43	IC44	IC45	IC46	IC47	IC48	IC49	IC50	IC51	IC52	IC53	IC54	IC55	IC56	IC57	IC58	IC59	IC60	IC61	IC62	IC63	IC64	IC65	IC66	IC67	IC68	IC69	IC70	IC71	IC72	IC73	IC74	IC75	IC76	IC77	IC78	IC79	IC80	IC81	IC82	IC83	IC84	IC85	IC86	IC87	IC88	IC89	IC90	IC91	IC92	IC93	IC94	IC95	IC96	IC97	IC98	IC99	IC100
--------	------------------	-----	-----	---	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-------

11	21	31	41
12	22	32	42
14	24	34	44
Q1	Q2	Q3	Q4

81) Open/closed auxiliary contacts of circuit-breaker - AUX 4Q (4 Form C)

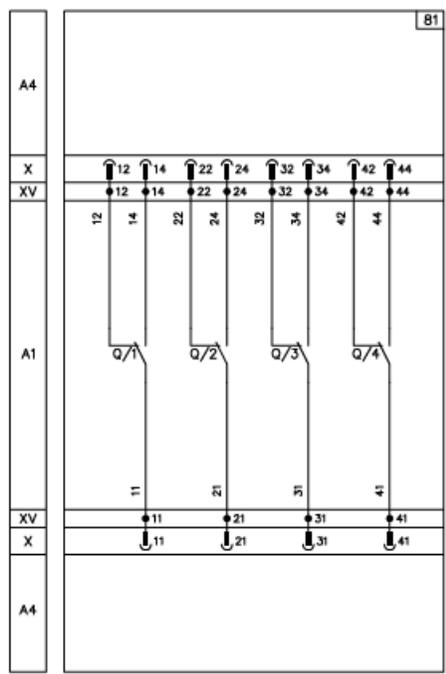

*B)

Electrical accessories


81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	V3	Vh	Qv4	Sc4	Nv4	W3	K1	45	D1	C1	C11	C21	11	21	31	41																												
66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	U1	R2	U2	L2	M	Y1	V2	R2	Qv2	Sc2	Nv2	W2	K2	46	D2	C2	C12	C22	12	22	32	42																											
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	V1	Qv1	Sc1	Nv1	W1	K1	48	D2	C2	C12	C22	14	24	34	44																													
C6, C8, EOP, Sgrowing 4K																								Trip Unit/CO				EOP Supply				Module				Module				Module				RTC				YU YO2				YC				YO				YC2			

45	D1	C1	C11	C21
46	D2	C2	C12	C22
48	D2	C2	C12	C22
RTC	YU YO2	YC	YO	YC2

- 77) First closing coil - YC
- 78) First closing coil with control from protection trip unit - YC, Ekip Com Actuator
- 79) Second closing coil - YC2

77-78 as an alternative to each other


79 valid only for E2.2 - E4.2 - E6.2

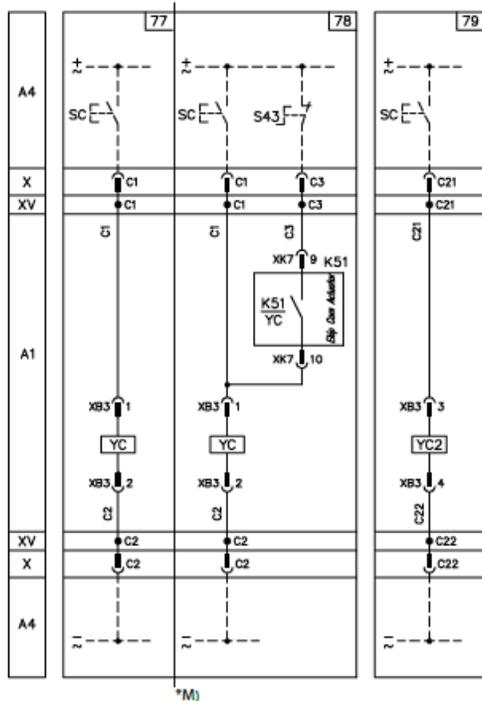

Electrical accessories



- 11) Trip signalling contact - S51
- 12) Contact for signalling position of loaded springs - S33 M/2
- 13) Motor for loading closing springs - M
- 14) Trip contact reset coil – YR

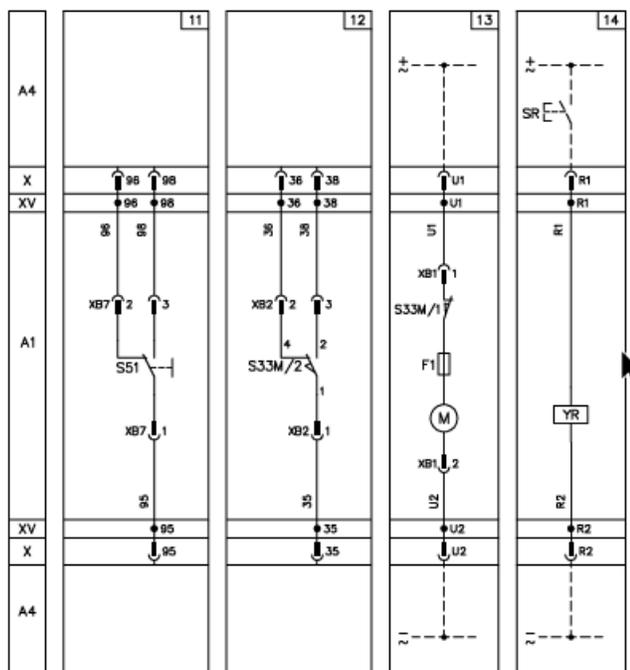

*D)

16. REPLACEMENT PARTS

Replacement parts are available for the transfer switch as follows:

NOTE

When ordering replacement parts please provide the following information:

-Transfer Switch Model Code (e.g. TS 883AA2000AS)

-Transfer Switch Serial Number (e.g. W-022345)

The above information can be found on the transfer switch rating plate located on the outside of the ATS door.

Component Description	Thomson Power Systems Part Number	Comments
TSC 7320 Controller Service Replacement	TSC7320SR	Must change the controller settings via the front panel prior to use. Refer to TSC 7320 Instruction Manual.
120VAC Load Relay (LR), 14 pin Square	001276	Must ensure coil voltage is correct
120VAC Auxiliary Plug-in Relay, 11 pin Square (UX/GX)	001278	Must ensure coil voltage is correct
120VAC Auxiliary Plug-in Timer	001515	Must ensure coil voltage is correct
100VA Control Transformer	002159	
200VA Control Transformer	002162	

For other parts not listed, please contact Thomson Power Systems.

17. PRODUCT RETURN POLICY

Thomson Power Systems uses a Return Material Authorization (RMA) process. Please complete the [Return Authorization Request Form](#) (available on our web page) for return of goods, warranty replacement/repair of defective parts, or credit consideration.

Returns only: Email sales@thomsonps.com

Warranty replacement/repair: Email support@thomsonps.com.

Upon receipt of your request, Thomson Power Systems will confirm with a copy of our Order Acknowledgement, advising the RMA number which should be used to tag the defective controller prior to shipment.



18. NOTES





19. PERFORMANCE TEST FORM

This form should be retained by those in charge of the building electrical installation in order to be available to the authority having jurisdiction.

Date	Personnel	Tests performed	Comments
		Interconnection evaluation	
		Grounding point evaluation	
		Fault current test:	
		Ground fault settings - _____	
		Simulated current - _____	
		Results - _____	



APPENDIX “A”



TYPICAL TS 880 ATS COMMISSIONING PROCEDURES (OPEN TRANSITION)

NOTE

The following commissioning procedures are provided for general information only pertaining to typical site installations and applications. Contact Thomson Power Systems for further information as may be required.

A) Pre-Energization Checks

1. Verify the generator and utility supply voltages match the model of the ATS ordered. If a different voltage is required, refer to procedure in Appendix B of this guide for voltage change programming procedure.
2. Confirm power cable size is correct for the lugs supplied in the transfer switch (line, load, and neutral) and are properly torqued.
3. Confirm transfer switch has been adequately grounded per NEC/CEC requirements.
4. Confirm power cables have been Insulation Resistance Tested to ensure no cross phase connections or conduction to ground.
5. Check to ensure there is no mechanical damage.
6. Check to ensure no packaging materials or tools are left inside the transfer switch.
7. Verify control wiring connected to terminal blocks are properly installed (i.e. no frayed ends, screws are tight, no damage, etc.)
8. Ensure ATS Power Chassis & Voltage Sensing Isolation Plugs (PL12 & PL15) are inserted and all TSC 7320 Controller plugs are inserted prior to operation.
9. Visually verify the transfer switch mechanism is closed in the utility position as indicated on the power switching device cover.
10. Verify correct control wire interconnects have been installed to the generator set auto start/stop controls.

NOTE: The ATS Engine Start contact closes to start the engine and opens to stop the engine.

11. Ensure the inside of the transfer switch is clean from all dust, and other foreign materials.

APPENDIX "A"



TYPICAL TS 880 ATS COMMISSIONING PROCEDURES (OPEN TRANSITION)

12. Close ATS enclosure door and tighten all door screws.
13. Visually verify on the transfer switch enclosure that there are no gaps, holes, or potential for water ingress.



B) Equipment Energization

DANGER

HAZARD OF ELECTRICAL SHOCK, EXPLOSION, OR ARC FLASH

This equipment must be serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Many components of this equipment operate at line voltage. DO NOT TOUCH. Use only electrically isolated tools. Failure to do so may cause personal injury or death

DANGER - HAZARD OF ELECTRICAL SHOCK, EXPLOSION, OR ARC FLASH

This equipment must be serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE). Many components of this equipment operate at line voltage. DO NOT TOUCH. Use only electrically isolated tools.

Failure to do so may cause personal injury or death

14. Confirm Utility, Generator and loads can be energized in a safe manner.
15. Energize utility supply and wait approximately 20 seconds for the TSC 7320 controller to successfully perform an initial boot-up process. A Thomson Power Systems Logo will be displayed during the booting process. 

NOTE: Under normal operation, TSC 7320 controller will not re-boot due to use of an external control power reservoir circuit. The Low Power Buffer (LPB) maintains DC control power during Utility power failures, allowing the controller to start the gen and transfer to it without rebooting.

16. Confirm utility voltage on the TSC 7320 DISPLAY Home page is matching with the rating of the ATS. If the voltage is not matching, refer to Appendix B, TS 880 system voltage change procedure of this manual to modify the controller settings. If the voltage is matching, the ATS will automatically transfer to the Utility source.

APPENDIX “A”



TYPICAL TS 880 ATS COMMISSIONING PROCEDURES (OPEN TRANSITION)

17. To perform any changes to the TSC 7320 controller settings, refer to PM180 TSC 7320 controller O&M manual for details.
18. Set the TSC 7320 Internal time clock – With the TSC 7320 powered on, Enter the restricted area of the settings, and find the page with the “Display” heading. If the date and time is not listed, the up or down navigation button may need to be pressed to show the setting.
19. Press the center checkmark button and one section will start to flash. Use the up or down navigation keys to change the value of the flashing setting, and the left and right keys to change which part of the setting is going to be changed



20. Change all parts of the time and date to match the desired values and press the center checkmark when finished. Hold the center checkmark to exit the editor mode.



21. Verify the status of the following indicator lights on the TSC 7320 front panel:
 - Utility Source Green LED is “ON” when the voltage is healthy and available
 - Load on Utility Green LED is “ON” when the load is connected to the utility
22. Run the generator manually and confirm generator voltage on the TSC 7320 display, the voltage is displayed on the “Generator” page. Verify the measured voltage is correct and matches the rating of the ATS.
23. With generator still running, confirm generator phasing matches that of the Utility supply by viewing the “Generator” page, and using the up or down navigation buttons to find the “Gen Phase Sequence” page. If phase rotation does not match, de-energize ATS and re-confirm supply rotation and power wiring is correct.

APPENDIX “A”



TYPICAL TS 880 ATS COMMISSIONING PROCEDURES (OPEN TRANSITION)

NOTE

On 3 Phase Systems, the TSC 7320 ATS controller has Phase Rotation miss-match protection. For the ATS to successfully transfer between sources, both the Utility and Generator Source Phase rotation must be matched. Phase rotation on both sources can be either positive rotation (i.e. A-B-C) or negative rotation (C-B-A) via programming selection on the TSC 7320.

24. Verify the TSC 7320 front panel Generator Source green LED is “ON”
25. To confirm automatic starting and load transferring of the generator, perform an On-Load test as described in section M(e). Press the “Test mode” button, and then press the green “Start” button. The generator will start and transfer on load per Automatic Sequence. The following lights on the TSC 7320 front panel should be on: Engine Start, Gen Source LED and Load on Gen LED.
26. To stop the generator and transfer load back to the utility supply, press the “Auto” button to return to auto mode. The load will re-transfer back to the utility power as per Automatic Sequence.
27. Perform a utility power outage test by opening the upstream utility feeder breaker to the ATS. The TSC 7320 front panel Utility available LED will turn off; the generator set will start after the 2-second engine start delay has expired and the generator will start and transfer on load as per Automatic Sequence.
28. Return Utility supply voltage to the ATS by re-closing the upstream utility breaker. The load should re-transfer back to the utility supply as per Automatic Sequence.

APPENDIX “B”

THOMSON POWER SYSTEMS®



TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

The system voltage change procedure is a 2 step process 1) ATS Potential Transformer Tap Change and 2) TSC 7320 Software Programming. Details of each step are as follows:

A) ATS Potential Transformer Tap Change



DANGER

HAZARD OF ELECTRICAL SHOCK, EXPLOSION, OR ARC FLASH


This equipment must be serviced only by qualified electrical personnel utilizing safe work practices and appropriate Personal Protective Equipment (PPE).

Many components of this equipment operate at line voltage. DO NOT TOUCH. Use only electrically isolated tools.

Install and close all covers before applying power to this equipment

Do not open covers to equipment until ALL power sources are disconnected

1. Ensure all power sources are de-energized and are safely Locked-out from service prior to opening the transfer switch enclosure door.
2. Disconnect AC Sensing and ATS Power Chassis Circuit Isolation Plugs PL12 & PL15.
3. Change voltage transformer primary taps settings as follows to match new system voltage on all potential transformers (PTs). (Refer to wiring schematic diagram below).




APPENDIX "B"

THOMSON POWER SYSTEMS®



TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

- Carefully remove the potential transformer high voltage side covers by prying up on the edge of the cover with a ¼" Flat Head Blade screwdriver and lifting off.

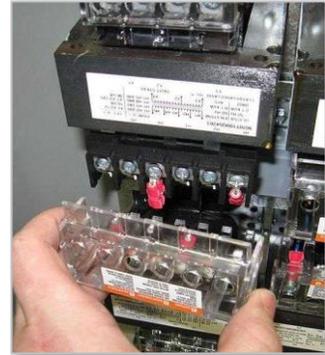

NOTE: You can also use your finger to pry up on the edge of the PT cover.

- Remove the screw on the PT Tap which is the correct voltage selected for the application (i.e. H2-208V, H3-240V, H4-480V or H5-600V)

H6-Not Used H5-600V H4-480V H3-240V H2-208V H1 (Never Changes)



APPENDIX "B"

THOMSON POWER SYSTEMS®



TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

CAUTION: Brace PT terminal block with your hand when loosening or tightening ANY screws.

6. Remove the screw and red ring terminal connected to the incorrect (existing) PT voltage terminal. Install the screw and red ring terminal to the new selected PT Tap Terminal based on required voltage and tighten while supporting the terminal block. Make sure the ring terminal is not misaligned or the PT cover will not fit back on.



7. Install the extra screw back onto the old PT location and tighten.



CAUTION

Confirm that PT screws are correctly tightened, and do not put strain on the PT Tap wires.

8. Replace the PT cover. PT covers should 'snap' in place, confirm they are installed correctly by gently "twisting" the PT cover. DO NOT use excessive force.
9. Repeat the steps 1 to 8 for all Potential Transformers.

APPENDIX “B”

THOMSON POWER SYSTEMS®




TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

B) TSC 7320 Voltage Change Procedure


To change system voltage on the TSC 7320 controller, the transfer switch can be energized or de-energized to change the system voltage. If the transfer switch is energized, please ensure the mechanism is in the utility position, and place the controller in “Stop” mode by pushing the red button in the lower left corner. It is recommended to de-energize the transfer switch to mitigate any hazardous conditions. Always proceed with caution and follow the steps below to change the voltage.

NOTE: All system voltage changes are ONLY done via connecting a designated wire to a different terminal on the TSC 7320 controller. All alarm values are ONLY changed via software programming.

1. **Locating the PIN:** First find PINs 14 to 20 on the backside of the TSC 7320 controller. There will be a wire connected to PIN 14, and that wire will have a label specifying it is the voltage selection wire.

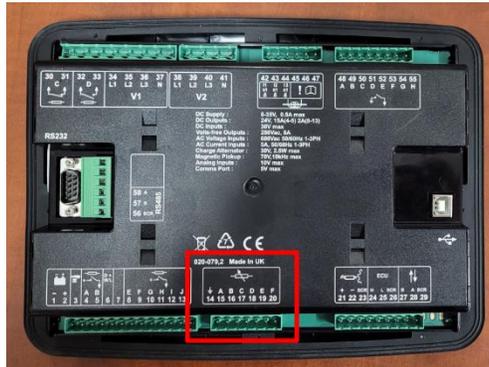

2. **Removing the wire:** Using a small flat head screwdriver, loosen the terminal screw for PIN 14, and remove the voltage selection wire out of PIN 14.

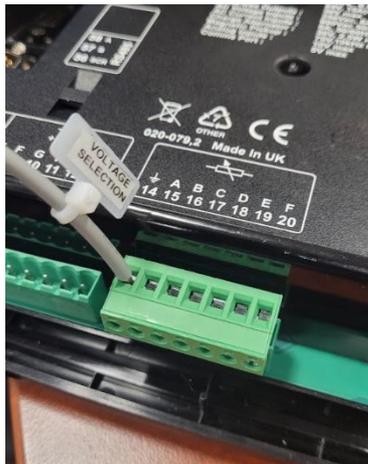

APPENDIX “B”

THOMSON POWER SYSTEMS®




TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

3. **Choosing voltage configuration:** There are 5 separate inputs that dictate the different configurations, and they are listed in the table below. Select one of the options below based on the ATS requirements.

Inputs	Pin No.	Descriptions
GROUND	14	480V 3PH 4W CONFIGURATION
ANALOGUE INPUT A	15	120/240V 1PH 3W CONFIGURATION
ANALOGUE INPUT B	16	208V 3PH 4W CONFIGURATION
ANALOGUE INPUT C	17	240V 3PH 4W CONFIGURATION
ANALOGUE INPUT D	18	600V 3PH 4W CONFIGURATION
ANALOGUE INPUT E	19	110V 1PH 2W CONFIGURATION

4. **Inserting the wire:** Insert the voltage selection wire into the desired terminal and tighten the screw on the terminal. The terminals are rated for 4.5in-lbs of torque, do NOT over tighten the terminal screw. The photo below shows the 600V 3PH 4W configuration.

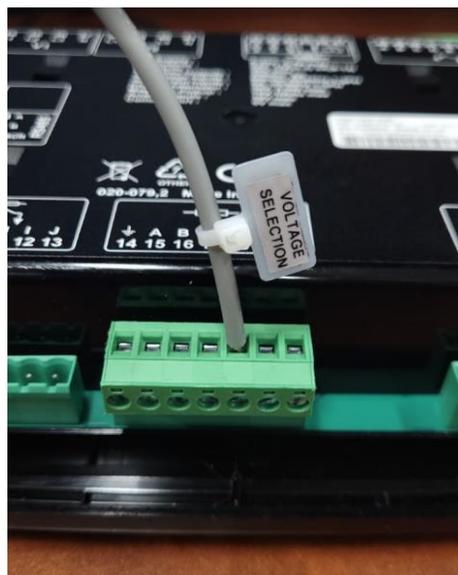


5. **Checking config:** If the panel is not energized, turn on the power and energize the transfer switch. After the controller boots-up, use the left or right navigation keys to find the “Mains” page, and use the up and down navigation keys to find the “Active Config” page. If the controller is properly registering the changed input, the screen should display the desired configuration, and NOT the default 480V configuration. In this case, the 600V configuration has been selected.

APPENDIX “B”

THOMSON POWER SYSTEMS®



TS 880 SYSTEM VOLTAGE CHANGE PROCEDURE

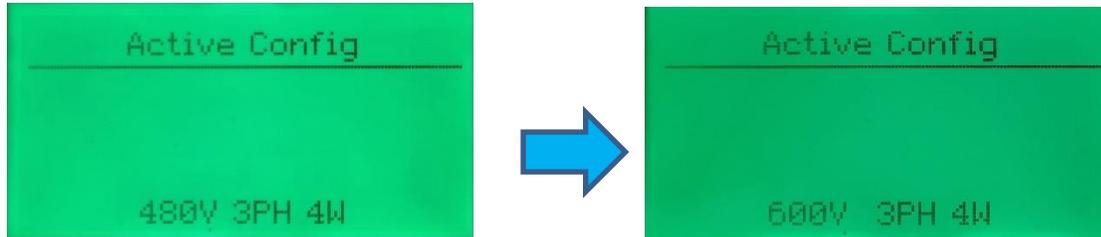


6. **Complete:** The voltage change procedure is now complete. If the voltage settings need to be adjusted from their default values, please refer to PM180 TSC 7320 controller O&M manual for details on entering the restricted area of the settings, and how to change values. Otherwise, proceed to energize the ATS to confirm proper operation as per procedure listed in Appendix A.

Seismic Certification

Thomson Technology – Automatic Transfer Switches TS 840, 870, 880 Approved for use in Seismic Applications

Thomson Technology has seismically certified its line of **Automatic Transfer Switches** including all models of **TS 840, 870, 880**. The certification was done by shake-table testing according to the nationally recognized standard, AC156. The standard covers seismic design requirements for non-structural components according to IBC 2006 and ASCE7-05.

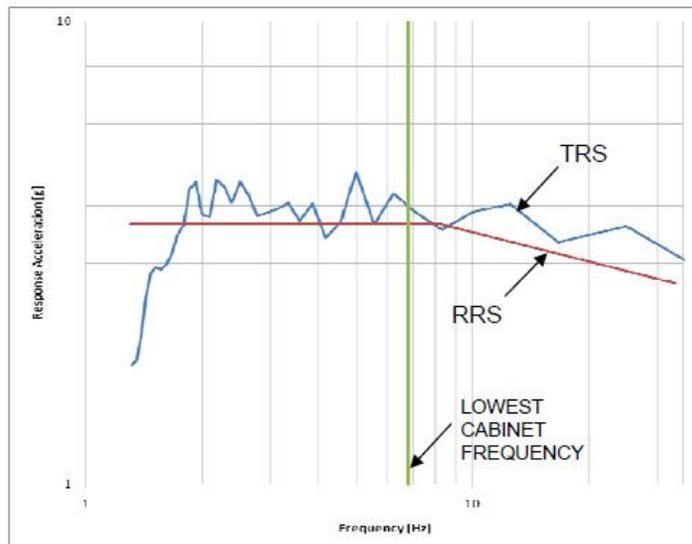

Dr. Carlos E. Ventura, PE
Director, TVP Engineering Ltd.
Certifying Company



Norm Schmidt
Vice President, Engineering and Administration
Thomson Technology

Shake-table tests were performed at Alpha Seismic and Environmental Test Laboratory and the Earthquake Engineering Research Facility, University of British Columbia. The figure shows a representative Test Response Spectrum (TRS) plotted with 5% damping against the AC156 Required Response Spectrum (RRS) with a S_w value of 342%. For more details, please refer to the certification notes.



Thomson Power Systems

4916 - 275th Street
Langley, BC, Canada V4W 0A3

Customer Support: 604-888-0110
Toll Free: 1-888-888-0110
Sales Email: sales@thomsonps.com
Service Email: support@thomsonps.com

For Preventative Maintenance or Extended Warranty information contact our Service Department at 604-888-0110 or email support@thomsonps.com

PM178 REV 0 23/02/20

Thomson Power Systems and Regal are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved.

