

400 kVA PRIME POWER



Available with optional
SMARTLOAD™
LOAD BANK SYSTEM

PERFORMANCE //

- 1 - DSE® Digital Control Panel
- 2 - Curbside Electrical Panel
- 3 - Large Electrical Lugs
- 4 - Emergency Stop Button
- 5 - Delta Demand Excitation™
- 6 - QuieTech™ Sound Attenuation

MAINTENANCE //


- 7 - Lift-off Door Hinges
- 8 - 110% Fluid Containment
- 9 - External Fuel Tank Valve
- 10 - Built-in Service Ladder
- 11 - Service Extensions
- 12 - Dedicated DEF Access Door

CONSTRUCTION //

- 13 - Powder-coated Steel Enclosure
- 14 - Stainless Steel Hardware
- 15 - Lockable Access Doors
- 16 - Automotive Door Seals
- 17 - 491 Gallon Fuel Tank
- 18 - Heavy-Duty Steel Trailer



Isuzu® 6WG1X
Tier 4 / CARB
Diesel Engine

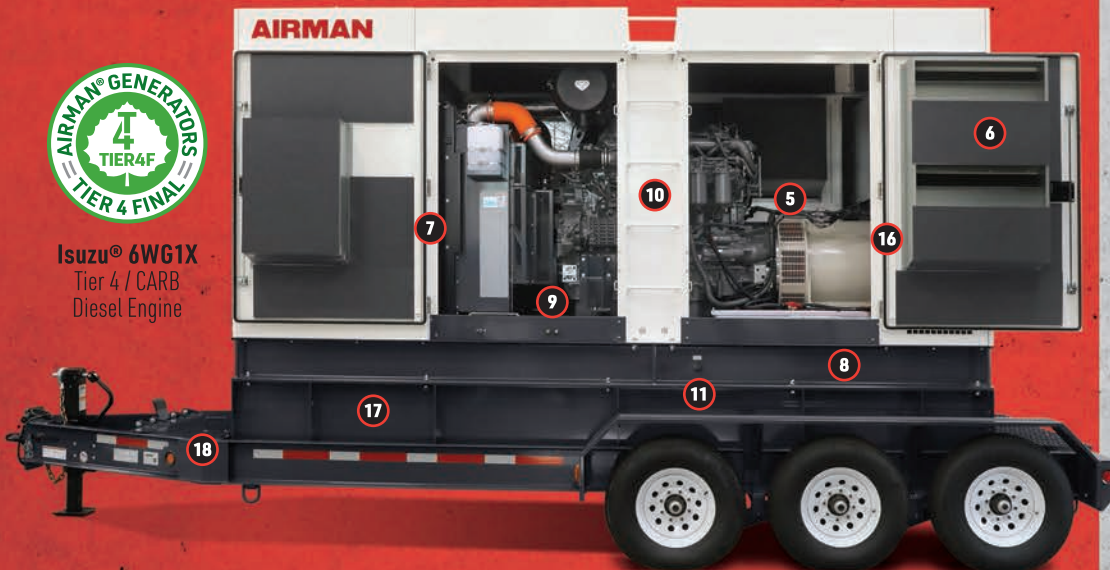


1 | DSEgenset® Digital Control Panel
Model 7310 MKII



2 | Single-Phase Receptacles
120V - 20A x 2 | 240V - 50A x 3



3 | Three-Phase Output Panel
Optional Triple Row Cam-Locks™ Shown

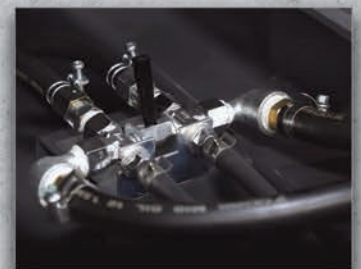

9 | External Fuel Tank Connections
with 3-Way Selection Valve

BEST-IN-CLASS dBA RATING // 24-HOUR RUNTIME // EXCELLENT MOTOR STARTING
THE INDUSTRY'S HIGHEST-QUALITY MOBILE GENERATORS

GENERATOR MODEL SDG400S-8E1

RUN WITH AIRMAN®

GENERATOR SPECIFICATIONS	SDG400S-8E1
ALTERNATOR TYPE	TAIYO WYE Winding
STANDBY OUTPUT	
THREE-PHASE AT 240V 3CD-4 WIRE	420 kVA / 336 kW
PRIME OUTPUT	
THREE-PHASE AT 240V 3CD-4 WIRE	400 kVA / 320 kW
FREQUENCY	60 Hz
VOLTAGE (THREE-PHASE), RECONNECTABLE	208/220/240/416/440/480
VOLTAGE (SINGLE-PHASE), ADJUSTABLE	120/127/139/240/254/277
ARMATURE CONNECTION	Star with Neutral
EXCITATION	Brushless with AVR
NUMBER OF POLES	4
POWER FACTOR (THREE-PHASE)	0.8
POWER FACTOR (SINGLE-PHASE)	1.0
INSULATION	Class F
VOLTAGE REGULATION	±0.5%
FREQUENCY REGULATION, STEADY STATE	±0.25% of Overall Mean Value
AMPERAGE	
SINGLE-PHASE (120V)	20A x 2 (Receptacle)
SINGLE-PHASE (240V)	50A x 3 (Receptacle)
THREE-PHASE (208V)	1048 A
THREE-PHASE (240V)	962 A
THREE-PHASE (480V)	481 A
ENGINE MAKE & MODEL	ISUZU® 6WG1X
ENGINE CONTROL PANEL	DSE® 7310 MKII
EPA TIER 4 / CARB EMISSION CERTIFIED 2021	CARB Exec. Order U-R-006-0505 EPA Cert. No. MSZXL15.70XB 2021
TYPE OF AFTERTREATMENT	DEF, DDC, SCR, ASC
ENGINE TYPE	Electronic Direct Injection 4-Cycle, Liquid Cooled Diesel
ASPIRATION	Turbocharged + Turbo After Cooler
SAE GROSS HP / BHP@1800 RPM	512.3 BHP / 382 kW

ENGINE MAKE & MODEL (Continued)	ISUZU® 6WG1X
HORSEPOWER RATING (@1800 RPM)	457.7 HP / 341.3 kW
NUMBER OF CYLINDERS	6
DISPLACEMENT	958 cu in / 15.7 L
ENGINE SPEED	1800 RPM
GOVERNOR TYPE	Electronic
FUEL TYPE	Ultra-low sulfur diesel
DEF CAPACITY	25 gal
DEF CONSUMPTION (MAXIMUM)	9.8 gal Per Tank of Diesel
DEF RUNTIME @ FULL LOAD	127 hrs
FUEL TANK CAPACITY	491 gal
FUEL CONSUMPTION	
FULL LOAD	23.1 gal/hr
75% LOAD	17.4 gal/hr
50% LOAD	12.1 gal/hr
RUNTIME @ FULL LOAD	21.3 hrs
FUEL PUMP (w/SERVICEABLE STRAINER)	Electric Fuel Supply
FUEL FILTER TYPE / QUANTITY	Pre-filters / Water Separator x 2 Fuel Filters x 2
LUBRICATING OIL CAPACITY	15.8 gal
BATTERY	
SYSTEM VOLTAGE	24V
BATTERY CHARGER ALTERNATOR	110 A
QUANTITY	2
COLD CRANKING AMPS	990 CCA
AMP HOURS	220 Ah
COOLING SYSTEM	
COOLING SYSTEM TYPE	Liquid/Air Fin and Tube Radiator, 50/50 Mix
COOLANT CAPACITY	19.8 gal
WATER PUMP TYPE	Impeller
FAN TYPE	Belt-driven Pusher
NOISE LEVEL @ 23 FEET (NO/FULL LOAD)	67 dBA / 70 dBA

ENCLOSURE	
	Positively Charged Ion (E-coat) Electrodeposition Coating, Baking Finish Coating for Weatherproof, and Anti-corrosion and Salt Pollution
PAINT TYPE	
ENCLOSURE METAL / CONSTRUCTION	Steel
GAUGE STEEL	14 Gauge
DOOR HINGES	Stainless Steel
SERVICE ACCESS POINTS HARDWARE	Stainless Steel
SPILL CONTAINMENT	110%
WEIGHTS & DIMENSIONS	
LENGTH x WIDTH x HEIGHT	177" x 59" x 107.5"
DRY WEIGHT	13,206 lbs
OPERATING WEIGHT	17,042 lbs
TRAILER WEIGHT	2,560 lbs
OPERATING WEIGHT w/ TRAILER (GVWR)	19,602 lbs
TRAILER WEIGHTS & DIMENSIONS	
LENGTH	270"
WIDTH	92"
HEIGHT W/GENERATOR INSTALLED	127"
WEIGHT	2,560 lbs
WHEEL SIZE-TIRE RATING	ST235/80R16 Load Limit E-3520 lbs @ 80 psi
NUMBER OF AXLES / RATING	3 Axles / 7,000 lbs each
BRAKING TYPE	Electric
LIGHTING TYPE	LED
CERTIFICATIONS USA/DOT COMPLIANT	FMVSS
ADJUSTABLE HITCH HEIGHT	3-Position
COMPLIANCE & CERTIFICATIONS	
FLUID CONTAINMENT	110%
USA DOT COMPLIANT	Yes
CSA LISTED	Yes
TRANSPORT CANADA COMPLIANT	Yes
DIESEL ENGINE EPA TIER LEVEL	Tier 4 Final

All specifications are subject to change without prior notice. Visit anacorp.com for the most current information.

SMARTLOAD™

LOAD BANK SYSTEM

(INSIDE AIR DISCHARGE CHAMBER)



Parallelling Control Panel



Battery Charger

ACCESSORIES & OPTIONS

- ◀ SmartLoad™ System
- ◀ Parallelling Feature
- ◀ Battery Charger
- ◀ Triple Row Cam-Loks™ (See Front)
- ◀ Lockable Battery Disconnect
- ◀ Fuel Filter Heater
- ◀ Engine Block Heater
- ◀ Battery Blanket
- ◀ 600V
- ◀ CSA Certification
- ◀ 5-Yr./7,000-Hr. Ext. Warranty



SOLD AND SERVICED BY

ANA N. California
1315 Vinci Avenue
Sacramento, CA 95838

ANA South Carolina
1335 Hayne Street
Spartanburg, SC 29301

ANA Texas
10440 Brockwood Road
Dallas, TX 75338



Alliance North America, Inc.
Corporate Headquarters
11100 Hope Street, Cypress, CA 90630

ANACORP.COM
(562) 450-3570 // sales@anacorp.com



We make your world easier.