



# GILLETTE GENERATORS

## LIQUID COOLED DIESEL ENGINE GENERATOR SET

Model	HZ	STANDBY
		120°C RISE
<b>SPJD-300-60 HERTZ</b>	60	30

60 HZ MODEL  
**SPJD-300**



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



**UL2200, UL1446, UL508, UL142, UL498**



**NFPA 110, 99, 70, 37**

All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



**NEC 700, 701, 702, 708**



**NEMA ICS10, MG1, ICS6, AB1**



**ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05**




**ASCE 7-05 & 7-10**

All generator sets meet 180 MPH rating.




**EPA 40CFR Part 60, 1048, 1054, 1065, 1068**

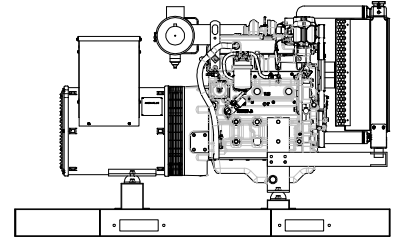

### “OPEN” GEN-SET

There is no enclosure, so gen-set must be placed within a weather protected area, uninhabited by humans or animals, with proper ventilation. Silencer not supplied, as installation requirements are not known. However, this item is available as optional equipment.

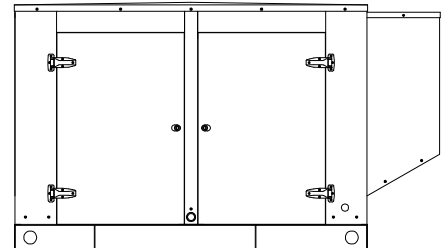

### “LEVEL 2” HOUSED GEN-SET

Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

## GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	120°C RISE STANDBY RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	
<b>SPJD-300-1-1</b>	120	240	1	60	30/30	125	4 LEAD DEDICATED 1 PH
<b>SPJD-300-3-2</b>	120	208	3	60	30/37.5	104	12 LEAD LOW WYE
<b>SPJD-300-3-3</b>	120	240	3	60	30/37.5	90	12 LEAD HIGH DELTA
<b>SPJD-300-3-4</b>	277	480	3	60	30/37.5	45	12 LEAD HIGH WYE
<b>SPJD-300-3-5</b>	127	220	3	60	30/37.5	98	12 LEAD LOW WYE
<b>SPJD-300-3-16</b>	346	600	3	60	30/37.5	36	4 LEAD DEDICATED 3 PH

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 120° C “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 120°C (standby) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

# APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-300-60 HZ

## GENERATOR SPECIFICATIONS

Manufacturer.....Stamford Electric Generators  
Model & Type.....S1L2H1706, 4 Pole, 4 Lead, Single Phase  
.....S1L2K1711, 4 Pole, 12 Lead re-connectable, Three Phase  
.....PI144G17, 4 Pole, 6 Lead. 600V, Three Phase  
Exciter.....Brushless, shunt excited  
Voltage Regulator.....Solid State, HZ/Volts  
Voltage Regulation.....½%, No load to full load  
Frequency.....60 HZ  
Frequency Regulation.....± ½% (½ cycle, no load to full load)  
Unbalanced Load Capability.....100% of standby amps  
Total Stator and Load Insulation.....Class H, 180°C  
Temperature Rise.....120°C R/R, standby rating @ 40°C amb.  
1 Ø Motor Starting @ 30% Voltage Dip (240V).....38 kVA  
3 Ø Motor Starting @ 30% Voltage Dip (208-240V).....67 kVA  
3 Ø Motor Starting @ 30% Voltage Dip (480V).....103 kVA  
3 Ø Motor Starting @ 30% Voltage Dip (600V).....91 kVA  
Bearing.....1, Pre-lubed and sealed  
Coupling.....Direct flexible disc.  
Total Harmonic Distortion.....Max 3½% (MIL-STD705B)  
Telephone Interference Factor.....Max 50 (NEMA MG1-22)  
Deviation Factor.....Max 5% (MIL-STD 405B)  
Ltd. Warranty Period.....24 Months from date of start-up or  
.....1000 hours use, first to occur.

## GENERATOR FEATURES

- World Renown Stamford Electric Generator having UL-1446 certification.
- Full generator protection with **Deep Sea 7420** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Generator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Full amortisseur windings with UL-1446 certification.
- Complete engine-generator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-generator sets, before shipping.
- Self ventilating and drip-proof & revolving field design

## ENGINE SPECIFICATIONS AND APPLICATIONS DATA

### ENGINE

Manufacturer.....John Deere  
Model and Type.....3029TFG89, 4 cycle  
Aspiration.....Turbocharged  
Cylinder Arrangement.....3 Cylinders, In-Line, 4 cycle  
Displacement Cu. In. (Liters).....177 (2.9)  
Bore & Stroke In. (Cm.).....4.2 x 4.3 (10.6 x 11.0)  
Compression Ratio.....17.2:1  
Main Bearings & Style.....4, Cu-Pd metal, Babbitt  
Cylinder Head.....Cast Iron  
Pistons.....4, Aluminum Wedge Type  
Crankshaft.....Carbon Steel & Full Balanced  
Exhaust Valve.....Heat Resisting Steel  
Governor.....Mechanical  
Frequency Regulation.....3% Isochronous  
Air Cleaner.....Dry, Replaceable Cartridge  
Engine Speed.....1800 rpm  
Max Power, bhp (kwm) Standby.....47 (35)  
BMEP: psi (kpa) Standby.....117 (807)  
Ltd. Warrant Period.....24 Months or 2000 hrs, first to occur

### FUEL SYSTEM

Type.....Diesel Fuel Oil (ASTM No. 2-D)  
Combustion System.....Direct Injection  
Fuel Injection Pump.....Stanadyne Rotary Type  
Fuel Filter and Water Separator.....Yes

### FUEL CONSUMPTION

GAL/HR (LITER/HR)	STANDBY
100% LOAD	3.0 (11.4)
75% LOAD	2.3 (8.7)
50% LOAD	1.6 (6.1)

### OIL SYSTEM

Type.....Full Pressure  
Oil Pan Capacity qt. (L).....8.5 (8)  
Oil Pan Cap. W/ filter qt. (L).....9 (8.5)  
Oil Filter.....1, Replaceable Spin-On

### ELECTRICAL SYSTEM

Ignition System.....Electronic  
Eng. Alternator and Starter:  
Ground.....Negative  
Volts DC.....12  
Max. Amp Output of Alternator.....65  
Recommended Battery to -18°C (0°F):..12 VDC, Size BCI# 24F  
Max Dimensions: ..10 3/4" lg X 6 3/4" wi X 9" hi, with standard round posts. Min. output at 600 CCA. Battery tray (max. dim. at 12"lg x 7"wi), hold down straps, battery cables, and battery charger, is furnished. Installation of (1) starting battery is required, with possible higher AMP/HR rating, as described above, if normal environment averages -13°F (-25°C) or cooler.

### CERTIFICATIONS

All engines are EPA emissions certified. All stationary diesel engines are Interim Tier IV compliant.

# APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-300-60 HZ

## COOLING SYSTEM

Type of System .....	Pressurized, closed recovery
Coolant Pump .....	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades) .....	Pusher (7)
Fan Diameter inches (cm).....	16" (40.6)
Ambient Capacity of Radiator °F (°C).....	125 (52)
Engine Jacket Coolant Capacity Qt. (L) .....	6.0 (5.7)
Radiator Coolant Capacity Qt. (L).....	6.46 (6.12)
Engine Heat Rejection. Btu/min (kw) .....	1412 (25)
Water Pump Capacity gpm (L/min).....	24 (91)
Heat Reject Coolant: Btu/min (kw) .....	1412 (25)
Low Coolant Level Shutdowns.....	Standard
Note: Coolant temp. shut-down switch setting at 212°F (100°C) with 50/50 (water/antifreeze) mix.	

## COOLING AIR REQUIREMENTS

Combustion Air cfm (m <sup>3</sup> /min) .....	127 (3.6)
Max. Air Intake Restrictions:	
Clean Air Cleaner, H <sub>2</sub> O (kpa).....	15 (3.8)
Intake Manifold Pressure, Psi (kpa).....	11 (75)
Max. Allowable Temp. Rise, Amb:	
Air to Engine Inlet, °F (°C) .....	15 (8)
Radiator Cooling Air, SCFM (m <sup>3</sup> /min).....	3200 (91)

## EXHAUST SYSTEM

Exhaust Outlet Size.....	2"
Max. Back Pressure in H <sub>2</sub> O (kpa).....	30 (7.5)
Exhaust Flow, at rated KW, cfm (m <sup>3</sup> /min) ...	293 (8.3)
Exhaust Temp, at rated KW, °F (°C).....	1076 (580)

## SOUND LEVELS MEASURED IN dB(A)

	Open Set	Level 2 Encl.
Level 2, Critical Silencer .....	69	63

Note: Open sets (no enclosure) have silencer system choices due to unknown job-site applications. Level 2 enclosure has installed critical silencer with upgrade to Level 3 hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

## DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level

## DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 104°F (40°C)

## DIMENSIONS AND WEIGHTS

	Open Set	Level 2 Enclosure
Length in (cm).....	68 (173)	82 (208)
Width in (cm).....	36 (91)	36 (92)
Height in (cm).....	46 (117)	47 (119)
1 Ø Net Weight lbs (kg).....	1369 (624)	1919 (870)
1 Ø Ship Weight lbs (kg) .....	1469 (666)	2079 (943)
3 Ø Net Weight lbs (kg).....	1334 (605)	1884 (855)
3 Ø Ship Weight lbs (kg) .....	1434 (650)	2044 (927)

# DEEP SEA 7420 MICROPROCESSOR CONTROLLER



### Deep Sea 7420

The "7420" controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The "7420" controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAr, kVAh, kVArh)

This controller includes expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional "WebNet" gateway interface module. This device will allow comprehensive monitoring of the generator via the cloud including identification, location, and status. Some advantages of this module include: reduced site visits and maintenance costs • remote fuel management • fault analysis • asset tracking • automatic system alerts • maximized system up-time.

# STANDARD FEATURES FOR MODEL SPJD-300-60 HZ

## STANDARD FEATURES

### CONTROL PANEL:

Deep Sea 7420 digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure
- High engine temp
- Low Radiator Level
- Three auxiliary alarms
- Battery fail alarm
- Engine fail to start
- Engine over speed
- Engine under speed
- Over & under voltage

Also included is tamper-proof engine hour meter

### ENGINE:

Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump

- Thermostat • Pusher fan and guard • Exhaust manifold
- 12 VDC battery charging alternator • Flexible exhaust connector • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator drain hose.

### AC GENERATOR SYSTEM:

AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

### VOLTAGE REGULATOR:

½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation

### DC ELECTRICAL SYSTEM:

Battery tray • Battery cables • Battery hold down straps

- 2-stage battery float charger with maintaining & recharging automatic charge stages

### WEATHER/SOUND PROOF ALUMINUM HOUSING CORROSION RESISTANT PROTECTION CONSISTING OF:

- 9 Heated And Agitated Wash Stages
- Zinc Phosphate Etching-coating Stage
- Final Baked On Enamel Powder Coat
- 18/8 Stainless Steel Hardware

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings.  
DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

