

MODEL

HRVW-625 T4F

60Hz MOBILE/PRIME/STANDBY POWER RATINGS kW (kVA)

500 kW/1800RPM



* Photo depicts a typical model but may not include options such as trailer.

DESCRIPTION

HIPOWER® Mobile generators are an efficient, reliable and versatile source of mobile electrical power. Designed to operate in the most extreme working conditions. All HIPOWER® Mobile Generators combine an innovative design and the use of high quality materials that provide the user with the most dependable power that you can rely on for non-stop power with easy to operate controls.

Powered by a radiator-cooled, industrial VOLVO PENTA Diesel engine, which meets current Environmental Protection Agency (EPA) TIER 4 Final non-road exhaust emission regulations, driving a single bearing, four-pole, three-phase alternator, with IP23 protection. The Prime Power kVA rating for generator set is given with a 105 degree °C alternator winding temperature rise.

HIPOWER® FEATURES AND BENEFITS

VOLVO PENTA Diesel Engine: Long-life, heavy-duty, 4-cycle, direct injection engine for economy of operation and maximum reliability and durability. Capable of full rated load acceptance in one step.

Cooling: Radiator with belt driven pusher fan.

Air Filter: Heavy-duty replaceable element air-cleaner.

Alternator: Single bearing, rotating field, self-excited, self-ventilated, 12-wire re-connectable, 60Hz brushless alternator with permanent magnetic generator (PMG), with Class F insulation. Automatic voltage regulator (AVR) providing close voltage regulation and skVA starting capability for electric motor loads.

Certification: ISO 8528-5.

VOLTAGE VAC	120/208V		139/240V		277/480V		347/600V**	
RATING	Prime	Standby	Prime	Standby	Prime	Standby	Prime	Standby
PHASE	3		3		3		3	
PF	0.8		0.8		0.8		0.8	
HZ	60		60		60		60	
KW	500	550	500	550	500	550	N/A	N/A
KVA	625	680	625	680	625	680	N/A	N/A
AMPS	1734	1887	1503	1636	752	818	N/A	N/A
SKVA @30% VOLTAGE DIP	1550		2050		2050		N/A	

Fuel Tank: Environmentally friendly steel base welded sub-base fuel tank with internal filling system and 110% containment capability for any diesel fuel, coolant or engine oil spills. Easy access for maintenance activities.

Enclosure: Fully sound attenuated enclosure, fabricated in 11-gauge steel, powder coated with finish that exceeds 1400-hr salt spray test, curved edges, minimum outside fasteners and single point lift. Ample layer of durable Rockwool sound insulating material placed all around the inside of the container, doors and ducting with metal retaining frames. It can be cleaned with high-pressure water and is oil and fire resistant. Vertical air discharge for quiet operation. Wide steel lockable access doors with rubber seals, easy access for maintenance and service activities, lift off stainless steel hinges, corrosion resistant hardware and fasteners.

Fuel Filtration: Standard and secondary water separator with visible level on fuel filters

Voltage Change-Over Board: Two-position, manual change over board. 120/208 and 277/480V 3-phase.

Controls: Digital control panel with manual and automatic start and stop features. Many programmable automatic functions for local and remote controls with LED lights, tamper proof engine hour recorder. Load Connections: Covered distribution panel for easy access to cable power outlets, receptacles, lugs and Camlocks.

HIMOINSA POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | HIPOWERSYSTEMS.COM

Codes and Standards Compliances used where applicable



APPLICATION DATA

ENGINE SPECIFICATION

Manufacturer	VOLVO PENTA
Model	TWD 1682 GE
EPA Certified	Tier 4 FINAL
Crankshaft Speed	1,800 rpm
Type	Diesel, 4-stroke
Injection	Direct
Aspiration	Turbocharged
Number of Cylinders	6
Cylinder arrangement	In-line
Displacement CID (liters)	983.9 (16.12)
Bore and Stroke ins (mm)	5.67 x 6.5 (144 x 165)
Nominal Power	796 HP
Cooling	Liquid
Governor	Electronic
Governor Regulation Class	ISO 8528 Part 1 Class G3
Frequency Regulation	Isochronous
Starting Motor & Alternator	24 volt
Compression Ratio	16.8:1
Air Cleaner Type	Heavy duty - single cartridge
Exhaust gas flow cu. ft./minute (cu.m. /minute)	4025 (114)
Max. Exhaust temp at full load degrees °F (°C)	793 (423)
Max. Permissible back pressure - ins H2O (kPA)	76 (19)

COOLING SYSTEM

Engine cooling air flow - cu. ft./min (cu. m/min)	30,207 (912)
Alternator cooling flow - cu. ft./min (cu. m/min)	2100 (59)
Total cooling air flow (engine + alternator + combustion) - cu. ft./min (cu. m/min)	TBD
Total cooling capacity - US gallons (liters)	25.3 (96)
Max. Operating Temperature °F (°C)	113 (45)

LUBRICATION SYSTEM

Oil pan capacity - US gallons (liters)	11.1 (42)
Oil pan capacity with filter - US gallons (liters)	12.7 (48)
Oil cooler	Liquid
Recommended lubricating oil grade	SAE 10W-40 conventional DH4 (refer to owners manual)
Oil consumption at full load	< 0.1% of fuel consumption
Oil pressure – psi (kPA)	58 (399)

ENGINE ELECTRICAL SYSTEM

Starting Motor Voltage	24 volt
Cold Cranking Amps - minimum	300 Amp X 2
Battery Charging Alternator	N/A
Battery Capacity	650 Amps X 2

HIMOINSA POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062
Tel: 913 495 5557 | HIPOWERSYSTEMS.COM

Codes and Standards Compliances used where applicable



APPLICATION DATA

FUEL SYSTEM		
Recommended Fuel	# 2 - ULSD	
Fuel supply line, min. ID mm(in.)	9.5 - (3/8")	
Fuel return line,min. ID, mm (in.)	9.5 - (3/8")	
Max. Lift, fuel pump, type, m (ft)	TBD	
Fuel Filter	Secondary 8 Microns @ 98% Efficiency	
DEF Tank capacity - US Gal.	42.3	
FUEL CONSUMPTION	FUEL (Prime Power Rating)	DEF (% of fuel consumption)
100% load – US gallons/hour (L/hr)	31.1 (105.6)	7.1 %
75% load - US gallons/hour (L/hr)	25 (94.6)	TBA
50% load - US gallons/hour (L/hr)	17.3 (65.4)	TBA
25% load - US gallons/hour (L/hr)	9.9 (37.4)	TBA
ALTERNATOR SPECIFICATION		
Manufacturer	STAMFORD	
Model	HCI 534 E with PMG	
Voltages	120/208V - 277/480	
Alternator Type	Four pole, rotating field	
Excitation System	Brushless. PMG-excited	
Power Factor	0.8 / 1.0	
Number of Leads	12 leads, reconnectable	
Stator Pitch	2/3	
Insulation	Class H	
Windings – Temperature Rise	Class F (105/40° C)	
Enclosure (IEC-34-S)	IP23	
Bearing	Single, sealed	
Coupling	Flexible disc	
Amortisseur Windings	Full	
Voltage Regulation – no load to full load with MX341 AVR	± 1%	
TIF	<50	
Radio Frequency Emissions compliance	Meets requirements of most industrial and commercial applications	
Line Harmonics	5% maximum	
STANDARD ACCESSORIES		
• Air Filter Restriction Indicator	Leak Proof Tray	
• Leakage Detection Sensor	MCLB Auxiliary Contacts	
• Battery Switch	Shunt Trip on MLCB	
• Crankcase Ventilation Filter	2 Position Voltage Change-Over Board	
• Oil/Coolant Drain Extension	PMG Excitation on Alternator	
• Distribution Panel 2000A	Low Coolant Level Sensor	
• Water Jacket Heater		
• Distribution power panel *See image RH back-page - NEMA 3R/IP67 0.09" aluminum panel, black powder coated, weather proof rated; 2x 30A 125V NEMA L5-30 Shore line connector; 6 sets 400A single pin Camlocks rated 400A with snap covers; color coded Camlocks 3Ø - 5W black, red blue, white & green; pad lockable 1/4 turn door access with cable trap; auxiliary bus bars with mechanical lugs; 1 single barrel lug per phase; mechanical lugs up to 2 x 600MCM cable		

HIMOinsa POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062
Tel: 913 495 5557 | HIPOWERSYSTEMS.COM

Codes and Standards Compliances used where applicable



OPTIONAL ACCESSORIES

- Battery Blanket
- Hydronic heater (5 kw)
- 3-Way Fuel valve
- 6 Amp - 10 Amp battery charger, 12/24V, UL Listed
- Trailer
- Variable speed fan
- Engineered Options available upon request
- Control Panel Heater
- Oil Pan Heater

CONTROL SYSTEMS STANDARD FEATURES - Generator Digital Control Panel

HIPOWER® COMAP IG500 Control Panel: The IntelliGen 500 digital control panel is back-lit with icon LCD text display, and is PC configurable. IntelliGen 500 is a comprehensive controller for both single and multiple gen-sets operating in standby or parallel modes. Compact construction is optimized for these purposes and various modifications allow customers to select the optimum type for a particular application. A built-in synchronizer and digital isochronous load sharer allow a total integrated solution for gen-sets in standby, island parallel or mains parallel. Native cooperation of up to 32 gen-sets is a standard feature. IntelliGen 500 supports many standard ECU types and is specially designed to easily integrate new ones.

Engine alarms included: High coolant temperature, low oil pressure, low coolant level, unexpected shutdown, low fuel level, stop failure, low battery voltage, battery charging alternator failure, over-speed, under-speed, start failure and emergency stop. Support of engines with ECU (J1939, Modbus and other proprietary interfaces); alarm codes displayed in text form.



Alternator alarms included: Overload, unbalanced voltage, over voltage, under voltage, over frequency, under frequency, short circuit, reverse power, and incorrect phase sequence.

DISTRIBUTION PANEL VIEW




HIMOINSA POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062
Tel: 913 495 5557 | HIPOWERSYSTEMS.COM

Codes and Standards Compliances used where applicable




DIMENSIONS, WEIGHTS & SOUND LEVELS

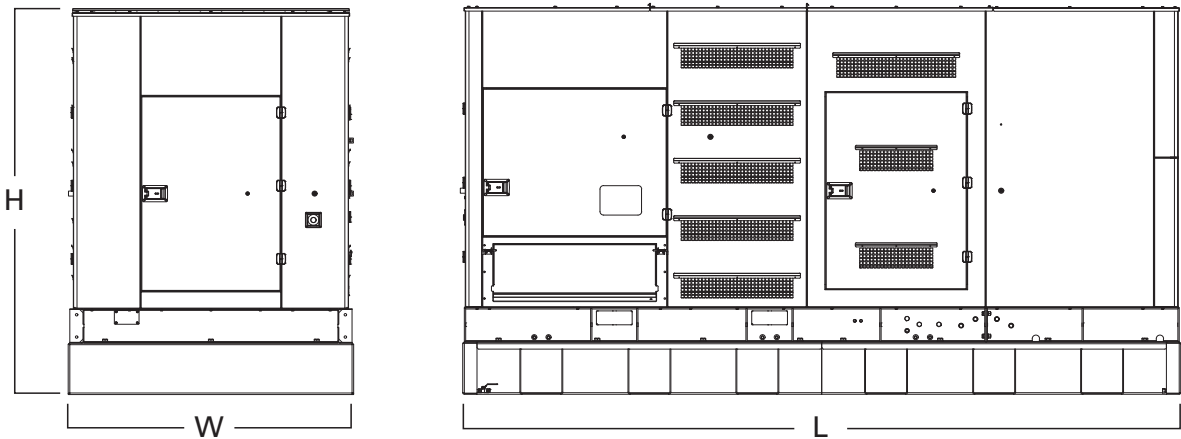

CONFIGURATION	Fuel Tank Data (base option)		Generator Data *				
	Run Time Hours	Capacity (Gals)	L = Length	W = Width	H = Height	Weight lbs	dBA
Enclosed Set	19	600	200"	81"	112"	18700	72

ENCLOSED SET WITH TRAILER

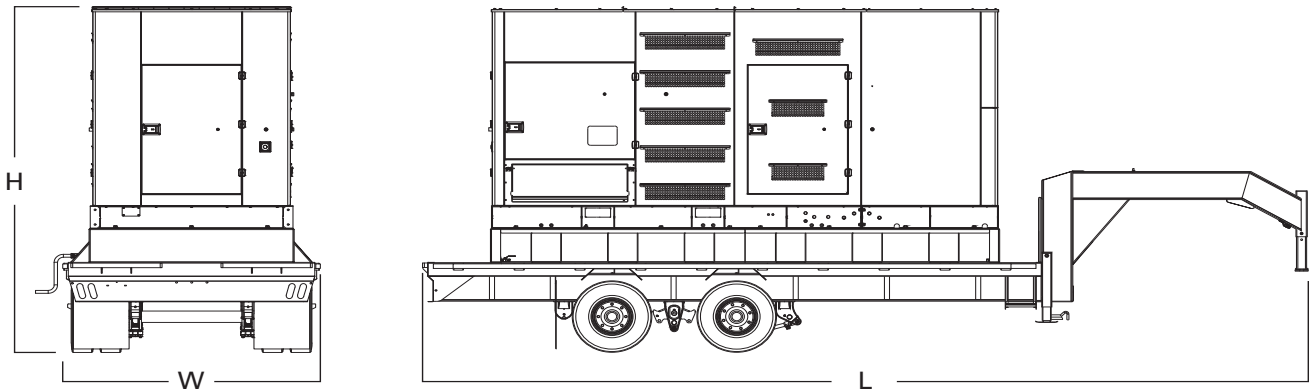

CONFIGURATION	Fuel Tank Data (base option)		Generator Data *				
	Run Time Hours	Capacity (Gals)	L = Length	W = Width	H = Height	Weight lbs	dBA
Enclosed Set with Trailer	19	600	347"	102"	152"	26160	72

* All measurements are approximate and for estimation purposes only. Weights are without fuel tank. Sound levels measured at 23ft (7m) and does not account for ambient site conditions.



Certified to CSA STD C22.2#100
Certified to CSA STD C22.2#14

REV 10

HIMOINSA POWER SYSTEMS, INC.
16600 South Theden Street, Olathe, KS 66062
Tel: 913 495 5557 | HIPOWERSYSTEMS.COM

Codes and Standards Compliances used where applicable

